



中国认可  
国际互认  
检测  
TESTING  
CNAS L5662



**ETSI EN 301 489-1 V2.2.3 (2019-11)**  
**ETSI EN 301 489-17 V3.2.4 (2020-09)**


**TEST REPORT**

For

**SHENZHEN TENDA TECHNOLOGY CO.,LTD.**

6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052

**Tested Model: CH3-WCA**  
**Multiple Models: RH3-WCA**

<b>Report Type:</b> Original Report	<b>Product Type:</b> 3MP Outdoor Wi-Fi Pan/Tilt Camera
<b>Report Number:</b>	2402V87807E-02
<b>Report Date:</b>	2024/9/4
<b>Reviewed By:</b>	Pedro Yun Project Engineer 
<b>Approved By:</b>	Rocky Xiao RF Supervisor
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) (No.12, Pulong East 1 <sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China) Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION .....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
DECLARATIONS .....	5
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION.....	6
EQUIPMENT MODIFICATIONS.....	6
EUT EXERCISE SOFTWARE .....	6
SUPPORT EQUIPMENT LIST AND DETAILS.....	6
SUPPORT CABLE LIST AND DETAILS.....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
TEST EQUIPMENT LIST .....	8
ENVIRONMENTAL CONDITIONS .....	9
<b>SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>1 - ENCLOSURE OF ANCILLARY EQUIPMENT MEASURED ON A STAND ALONE BASIS.....</b>	<b>11</b>
MEASUREMENT UNCERTAINTY .....	11
TEST SYSTEM SETUP .....	11
EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP .....	12
TEST PROCEDURE.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	13
TEST DATA.....	14
<b>3 - AC MAINS POWER INPUT/OUTPUT PORTS.....</b>	<b>22</b>
MEASUREMENT UNCERTAINTY .....	22
TEST SYSTEM SETUP .....	22
EMI TEST RECEIVER SETUP .....	23
TEST PROCEDURE.....	23
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	23
TEST DATA.....	24
<b>5 - VOLTAGE FLUCTUATIONS AND FLICKER (AC MAINS INPUT PORT).....</b>	<b>28</b>
TEST SYSTEM SETUP .....	28
TEST STANDARD .....	28
TEST DATA.....	29
<b>6 - WIRED NETWORK PORTS.....</b>	<b>30</b>
MEASUREMENT UNCERTAINTY .....	30
TEST SYSTEM SETUP .....	30
EMI TEST RECEIVER SETUP .....	31
TEST PROCEDURE.....	31
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	31
TEST DATA.....	32
<b>7 - RADIO FREQUENCY ELECTROMAGNETIC FIELDS (80 MHZ TO 6 000 MHZ) .....</b>	<b>34</b>
MEASUREMENT UNCERTAINTY .....	34
TEST SYSTEM SETUP .....	34
TEST LEVEL .....	34
TEST PROCEDURE.....	35
TEST DATA.....	35
<b>8 - ELECTROSTATIC DISCHARGES.....</b>	<b>36</b>

MEASUREMENT UNCERTAINTY .....	36
TEST SYSTEM SETUP .....	36
TEST LEVEL .....	37
TEST PROCEDURE.....	37
TEST DATA.....	38
<b>9 - FAST TRANSIENTS, COMMON MODE.....</b>	<b>40</b>
MEASUREMENT UNCERTAINTY .....	40
TEST SYSTEM SETUP .....	40
TEST LEVEL .....	40
TEST PROCEDURE.....	41
TEST DATA.....	41
<b>10 - RADIO FREQUENCY, COMMON MODE .....</b>	<b>42</b>
MEASUREMENT UNCERTAINTY .....	42
TEST SYSTEM SETUP .....	42
TEST LEVEL .....	42
TEST PROCEDURE.....	43
TEST DATA.....	43
<b>12 - VOLTAGE DIPS AND SHORT INTERRUPTIONS.....</b>	<b>44</b>
TEST SYSTEM SETUP .....	44
TEST LEVEL AND PERFORMANCE CRITERION .....	44
TEST PROCEDURE.....	44
TEST DATA.....	45
<b>13 - SURGES .....</b>	<b>46</b>
TEST SYSTEM SETUP .....	46
TEST LEVEL .....	46
TEST PROCEDURE.....	46
TEST DATA.....	47
<b>EXHIBIT A - EUT PHOTOGRAPHS .....</b>	<b>48</b>
MODEL: CH3-WCA .....	48
MODEL: RH3-WCA .....	65
<b>EXHIBIT B - TEST SETUP PHOTOGRAPHS.....</b>	<b>81</b>
RE.....	81
CE_AC .....	83
CE_NET .....	84
FLICKER .....	85
RS .....	86
ESD .....	87
EFT.....	88
DIPS .....	89
SURGE .....	90
CS .....	91

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402V87807E-02	Original Report	2024/9/4



## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>		3MP Outdoor Wi-Fi Pan/Tilt Camera
<b>EUT Model:</b>		CH3-WCA
<b>Multiple Model:</b>		RH3-WCA
<b>Model Difference:</b>		Please refer to the DoS
<b>Rated Input Voltage:</b>		12Vdc from adapter
<b>Adapter 1# Information</b>	<b>Model:</b>	BN073-A12012B
	<b>Input:</b>	100-240V 50/60Hz 0.4A
	<b>Output:</b>	12Vdc 1.0A 12W
<b>Adapter 2# Information</b>	<b>Model:</b>	BN073-A12012E
	<b>Input:</b>	100-240V 50/60Hz 0.4A
	<b>Output:</b>	12Vdc 1.0A 12W
<b>Serial Number:</b>		2P2O-9
<b>EUT Received Date:</b>		2024/7/27
<b>EUT Received Status:</b>		Good

### Objective

This report is prepared on behalf of **SHENZHEN TENDA TECHNOLOGY CO.,LTD.** in accordance with ETSI EN 301 489-1 V2.2.3 (2019-11) ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility;

ETSI EN 301 489-17 V3.2.4 (2020-09) ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems;

The objective is to determine the compliance of EUT with: ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-17 V3.2.4 (2020-09).

### Test Methodology

All measurements contained in this report were conducted with ETSI EN 301 489-1 V2.2.3 (2019-11) ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility.

### Declarations

The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with ★.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

#### Test mode:

M1: Operating & WIFI Link

*Note: The two adapters are same except for the power pins, which do not affect the test result, thus, only one of them (Adapter 1#) was selected for full test.*

### Equipment Modifications

No modification was made to the EUT.

### EUT Exercise Software

Software " TDSEE.app" was used to test.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
SanDisk	Micro TF Card	UHS-I-16G	9292DVDSV0XZ
TENDA	Router	F6	E6895010048000097
Epik	Smartphone	K500	SZ180322001SA

### Support Cable List and Details

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
DC Cable	No	No	2.9	EUT	Adapter
RJ45 Cable	No	No	5.0	EUT	Router

Block Diagram of Test Setup

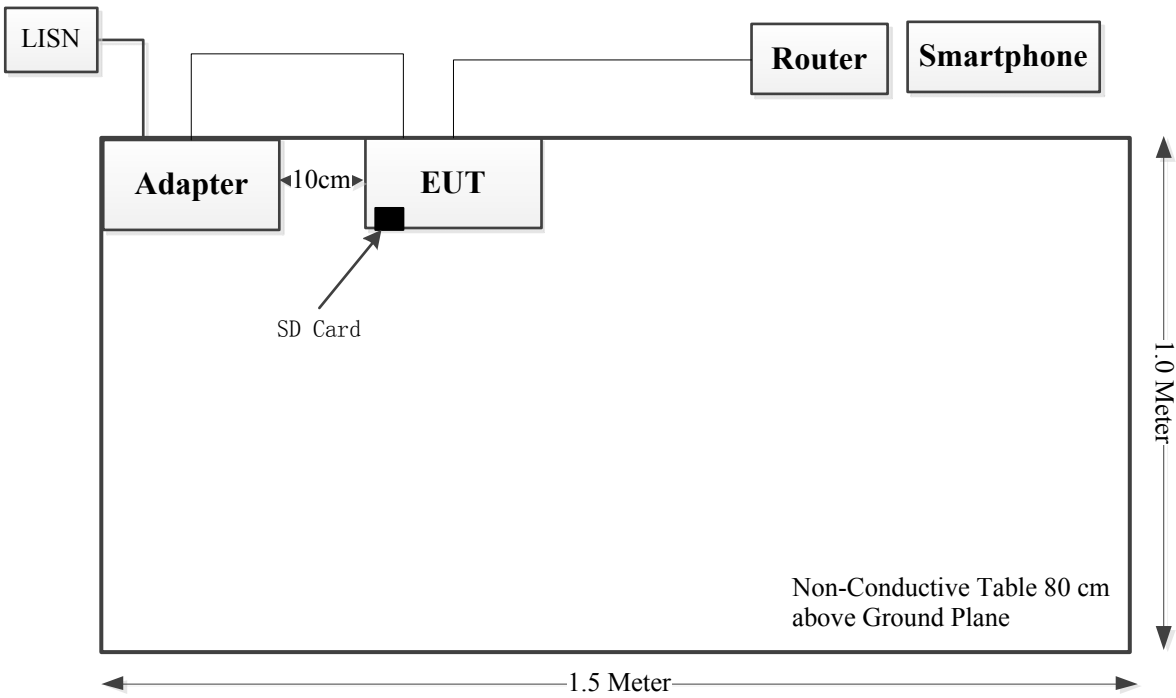

## Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission					
R&S	LISN	ENV216	101614	2023/10/18	2024/10/17
TESEQ	ISN	T800	34379	2023/9/4	2024/9/3
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2023/9/7	2024/9/6
R&S	EMI Test Receiver	ESCI	100035	2023/8/18	2024/8/17
R&S	Test Software	EMC32	V9.10.00	N/A	N/A
Radiated emissions below 1GHz					
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/8/1	2025/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/8/1	2025/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/8/1	2025/7/31
Sonoma	Amplifier	310N	185914	2024/8/1	2025/7/31
R&S	EMI Test Receiver	ESCI	100224	2023/8/18	2024/8/17
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiated emissions above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2023/11/17	2024/11/16
AH	Preamplifier	PAM-0118P	469	2023/8/19	2024/8/18
R&S	Spectrum Analyzer	FSV40	101944	2023/10/18	2024/10/17
Audix	Test Software	E3	191218 V9	N/A	N/A
E-Microwave	Band Rejection Filter	OBSF-2400-2483.5-S	OE01601525	2024/2/21	2025/2/20
Flicker					
EVERFINE	Harmonic & Flicker Measurement System	HFM3000	P630850CD1411115	2023/10/18	2024/10/17
EVERFINE	Harmonic & Flicker Testing Power Source	HFS-4000	P624486CD1411122	2023/10/18	2024/10/17
CS					
HP	Signal Generator	8648A	3426A00831	2023/10/18	2024/10/17
AR	Power Amplifier	15A250	12934	N/A	N/A
Werlatone	Dual Directional Coupler	C5091-10	113192	N/A	N/A
NARDA	Coaxial Attenuator	769-6	02754	N/A	N/A
HP	Power Meter	EPM-441A	GB37481494	2023/10/19	2024/10/18
Agilent	Power sensor	8482A	US37296108	2023/10/19	2024/10/18
COM-POWER	CDN	M325E	521064	2023/8/18	2024/8/17
COM-POWER	CDN	T8E	581607	2023/8/18	2026/8/17
R&S	Audio Analyzer	UPV	103477	2023/11/27	2024/11/26
BK Precision	Sound Level meter	735	7350087310010020	2023/8/22	2024/8/21

EFT & Surge & Dips					
EM TEST	Dips Auto Transformer	V4780	0811-10	2024/5/15	2025/5/14
EM TEST	Ultra Compact Generator	UCS 500N5	V1204111721	2024/5/15	2025/5/14
EM TEST	Capacitive Coupling Clamp	HFK	0908-20	2024/5/15	2025/5/14
EM TEST	CDN	CNV 504A	V0523100466	2024/5/15	2025/5/14
ESD					
TESEQ	ESD Generator	NSG 438	1019	2023/11/16	2024/11/15
RS					
AR	Antenna	ATL80M1G	0351400	N/A	N/A
AR	Antenna	ATT700M12G	0349410	N/A	N/A
HP	Signal Generator	8665B	3438a00584	2023/10/18	2024/10/17
AR	Power Amplifier	500W1000C	0353561	N/A	N/A
AR	Power Amplifier	60S1G6	0348711	N/A	N/A
PASTERNAK	Dual Directional Coupler	PE2239-30	1711	N/A	N/A
Agilent	Power Meter	E4419B	MY45103907	2023/10/18	2024/10/17
Agilent	E-Series Avg Power Sensor	E9301A	MY41497625	2023/10/18	2024/10/17
Agilent	E-Series Avg Power Sensor	E9301A	MY41497628	2023/10/18	2024/10/17
R&S	Audio Analyzer	UPV	103477	2023/11/27	2024/11/26
BK Precision	Sound Level meter	735	7350087310010020	2023/8/22	2024/8/21

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Environmental Conditions

Test Item:	Conducted emission	Radiated emissions below 1GHz	Radiated emissions above 1GHz	EMS*	Flicker
Temperature:	27.1℃	32.2℃	30.6℃	26.5~26.8℃	26.7℃
Relative Humidity:	64%	52%	54.0 %	55~66%	66%
ATM Pressure:	99.5kPa	99.5kPa	100.1 kPa	100.1kPa	100.1kPa
Tester:	Lane Sun	Leesin Xiang	Colin Yang	Arvin Chen	Arvin Chen
Test Date:	2024/8/6	2024/8/6	2024/8/5	2024/8/14	2024/8/14

Note: The relative humidity of ESD test site is 55%.

## SUMMARY OF TEST RESULTS

SN	Rule and Clause	Description of Test	Test Result
1	EN 301 489-1 Clause 8.2	Enclosure of ancillary equipment measured on a stand alone basis	Compliant
2	EN 301 489-1 Clause 8.3	DC power input/output ports	Not applicable
3	EN 301 489-1 Clause 8.4	AC mains power input/output ports	Compliant
4	EN 301 489-1 Clause 8.5	Harmonic current emissions (AC mains input port)	Not applicable
5	EN 301 489-1 Clause 8.6	Voltage fluctuations and flicker (AC mains input port)	Compliant
6	EN 301 489-1 Clause 8.7	Wired network ports	Compliant
7	EN 301 489-1 Clause 9.2	Radio frequency electromagnetic fields (80 MHz to 6 000 MHz)	Compliant
8	EN 301 489-1 Clause 9.3	Electrostatic discharges	Compliant
9	EN 301 489-1 Clause 9.4	Fast transients, common mode	Compliant
10	EN 301 489-1 Clause 9.5	Radio frequency, common mode	Compliant
11	EN 301 489-1 Clause 9.6 <sup>*</sup>	Transients and surges in the vehicular environment	Not applicable (Note*)
12	EN 301 489-1 Clause 9.7	Voltage dips and short interruptions	Compliant
13	EN 301 489-1 Clause 9.8	Surges	Compliant

Note:

Not Applicable: Please refer to Applicability overview tables in sections 7.1 and 7.2 of EN 301 489-1 requirements for Radio and ancillary equipment.

Note\*: This test item was not approved by CNAS.

# 1 - ENCLOSURE OF ANCILLARY EQUIPMENT MEASURED ON A STAND ALONE BASIS

## Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cisp}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cisp}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011\*, measurement uncertainty of radiated emission at a distance of 10m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.55 dB for Horizontal, 4.57 dB for Vertical; 200M~1GHz: 4.66 dB for Horizontal, 4.56 dB for Vertical; measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB


**Table 1 - Values of  $U_{cisp}$**

Measurement	$U_{cisp}$
Radiated disturbance (electric field strength at an OATS or in a SAC)(30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR)(1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR)(6 GHz to 18 GHz)	5.5 dB


Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

## Test System Setup

Below 1GHz:

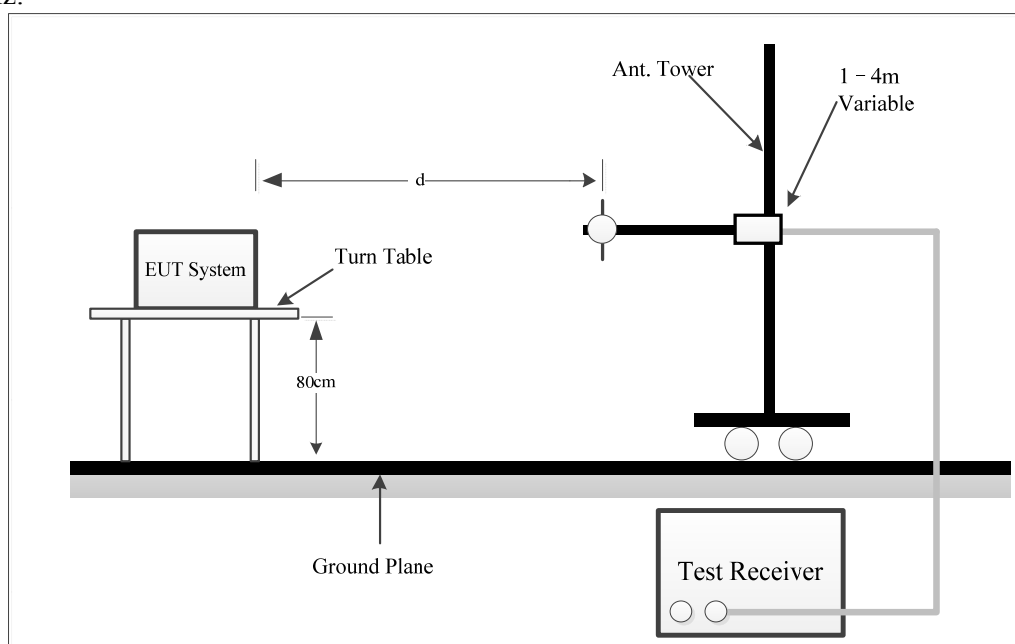

Above 1GHz:

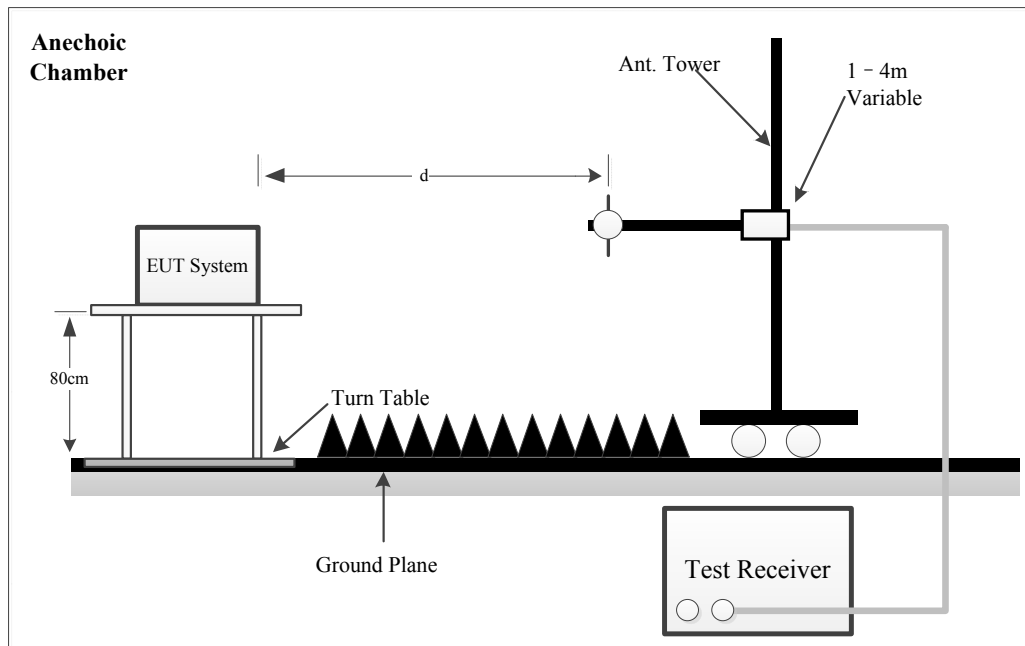

The radiated emission tests below 1GHz were performed in 3 meters, above 1GHz were performed in the 3 meters. The specification used was EN 55032 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

## EMI Test Receiver and Spectrum Analyzer Setup

The system was investigated from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver(Below 1GHz) and Spectrum Analyzer(Above 1GHz) were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	Peak
	1MHz	10Hz	/	Average

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1GHz.



## Corrected Amplitude & Margin Calculation

The basic equation is as follows:  $\text{Result} = \text{Meter Reading} + \text{Corrected}$

Note:

$\text{Corrected} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$ , or

$\text{Corrected} = \text{Antenna Factor} + \text{Cable Loss} + \text{Insertion loss of attenuator} - \text{Amplifier Gain}$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:  $\text{Margin} = \text{Limit} - \text{Result}$


## Test Data

Please refer to following table and plots:

### Below 1G

**Condition:** EN 301 489 Class B 3m Radiation  
**Test Mode:** M1  
**Note:**


**Polarization:** Horizontal  
**Distance:** 3m  
**Power:** AC 230V/50Hz

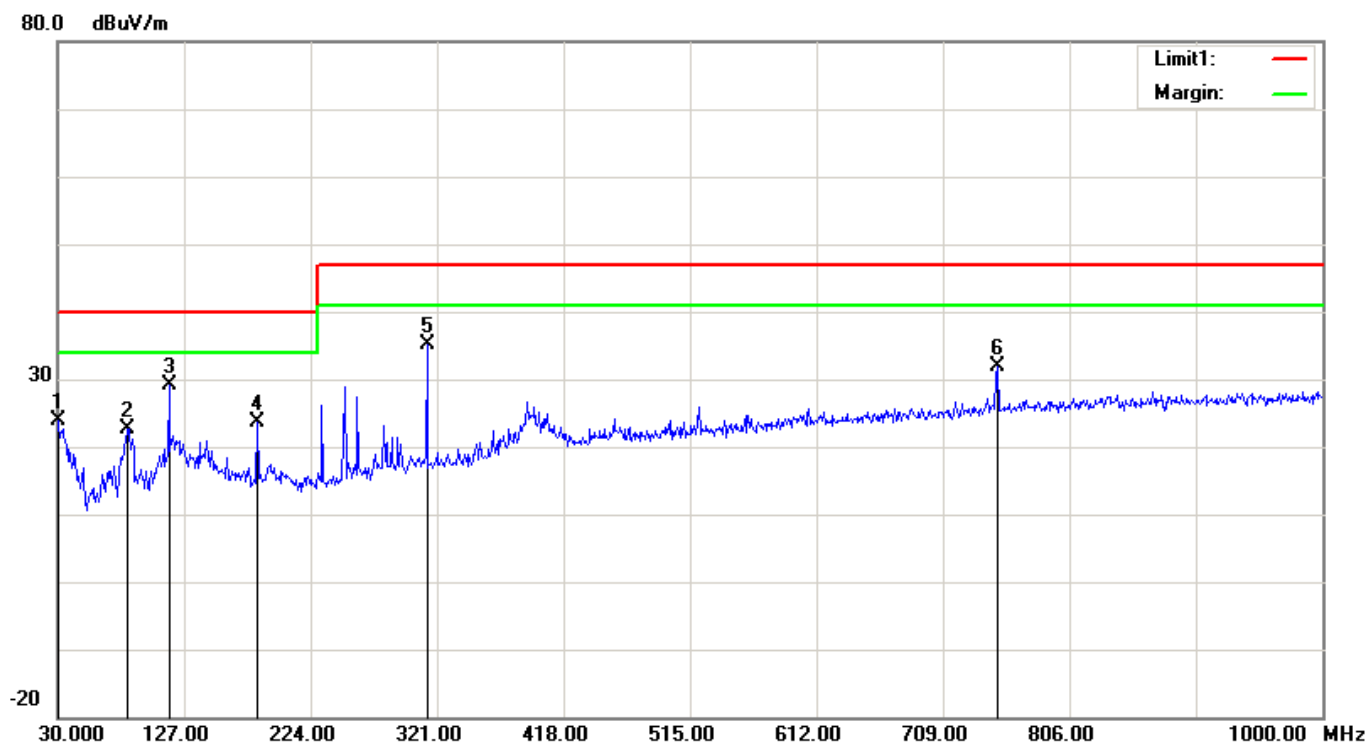

No.	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
	(MHz)	(dB $\mu$ V)		(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
1	30.0000	27.73	peak	-3.80	23.93	40.00	16.07
2	83.3500	39.33	peak	-16.59	22.74	40.00	17.26
3	115.3600	39.82	peak	-10.60	29.22	40.00	10.78
4	183.2600	35.88	peak	-12.29	23.59	40.00	16.41
5	313.2400	44.31	peak	-9.23	35.08	47.00	11.92
6	750.7100	32.23	peak	-0.30	31.93	47.00	15.07

**Condition:** EN 301 489 Class B 3m Radiation  
**Test Mode:** M1  
**Note:**


**Polarization:** Vertical  
**Distance:** 3m  
**Power:** AC 230V/50Hz

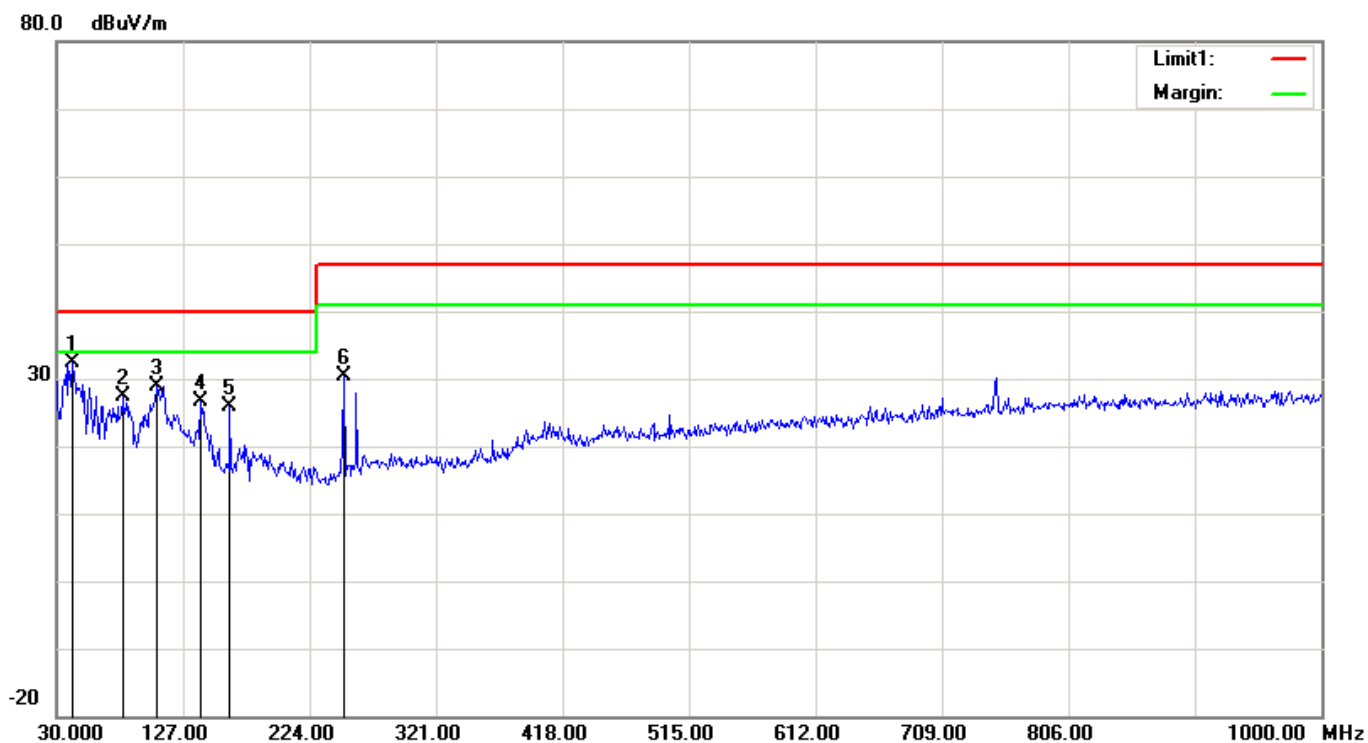

No.	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
	(MHz)	(dB $\mu$ V)		(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
1	41.6400	44.20	peak	-11.82	32.38	40.00	7.62
2	80.4400	43.88	peak	-16.50	27.38	40.00	12.62
3	106.6300	41.39	peak	-12.39	29.00	40.00	11.00
4	140.5800	37.15	peak	-10.49	26.66	40.00	13.34
5	162.8900	37.13	peak	-11.33	25.80	40.00	14.20
6	250.1900	41.81	peak	-11.43	30.38	47.00	16.62

**Condition:** EN 301 489 Class B 3m Radiation  
**Test Mode:** M1  
**Note:**


**Polarization:** Horizontal  
**Distance:** 3m  
**Power:** AC 110V/60Hz

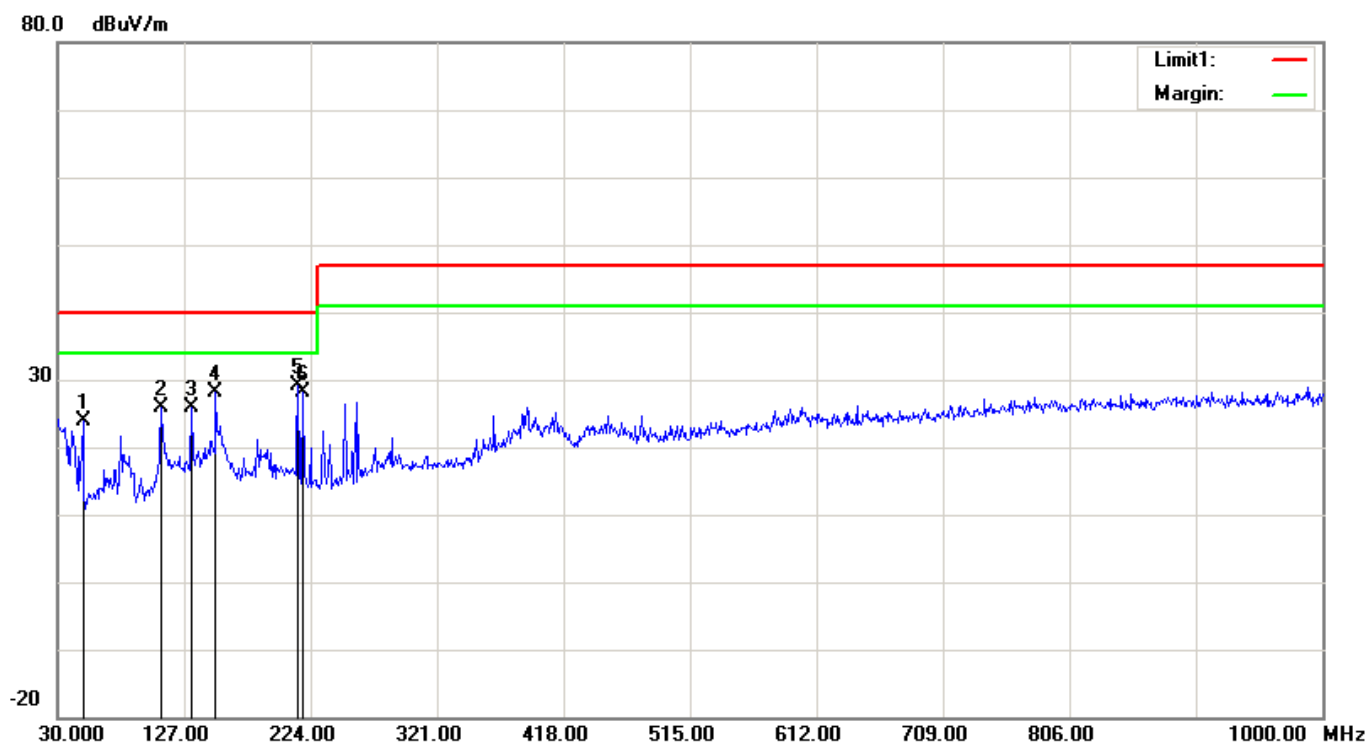

No.	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
	(MHz)	(dBμV)		(dB/m)	(dBμV/m)	(dBμV/m)	(dB)
1	49.4000	40.02	peak	-16.14	23.88	40.00	16.12
2	109.5400	37.37	peak	-11.49	25.88	40.00	14.12
3	132.8200	35.88	peak	-10.03	25.85	40.00	14.15
4	151.2500	39.13	peak	-11.07	28.06	40.00	11.94
5	214.3000	41.59	peak	-12.54	29.05	40.00	10.95
6	218.1800	40.61	peak	-12.51	28.10	40.00	11.90

**Condition:** EN 301 489 Class B 3m Radiation  
**Test Mode:** M1  
**Note:**

**Polarization:** Vertical  
**Distance:** 3m  
**Power:** AC 110V/60Hz

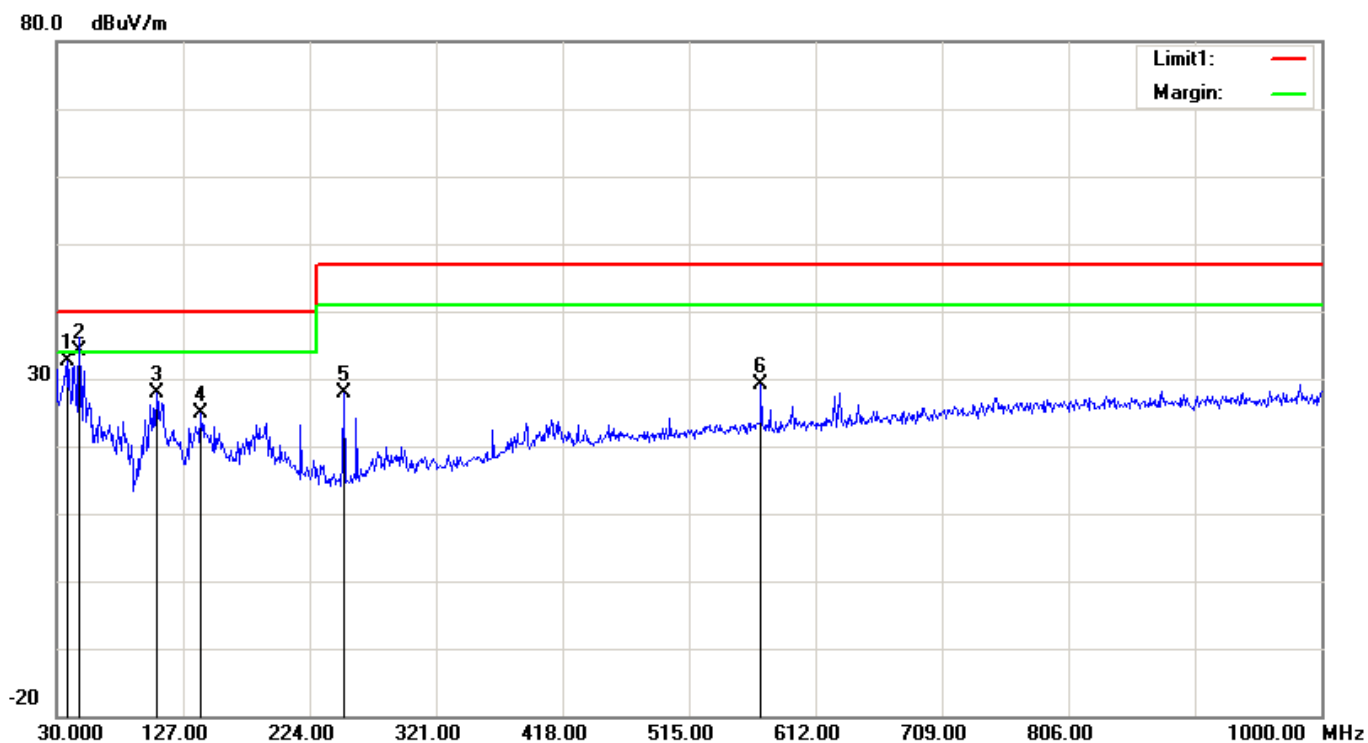


No.	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
	(MHz)	(dB $\mu$ V)		(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
1	38.7300	42.63	peak	-10.03	32.60	40.00	7.40
2	47.4600	49.24	QP	-15.04	34.20	40.00	5.80
3	106.6300	40.29	peak	-12.39	27.90	40.00	12.10
4	140.5800	35.35	peak	-10.49	24.86	40.00	15.14
5	250.1900	39.40	peak	-11.43	27.97	47.00	19.03
6	570.2900	32.36	peak	-3.22	29.14	47.00	17.86

Above 1G


Project No.: 2402V87807E-RF  
Polarization: Horizontal  
Test Mode: M1  
Note: 230V 50Hz

Serial No.: 2P20-9  
Tester: Colin Yang

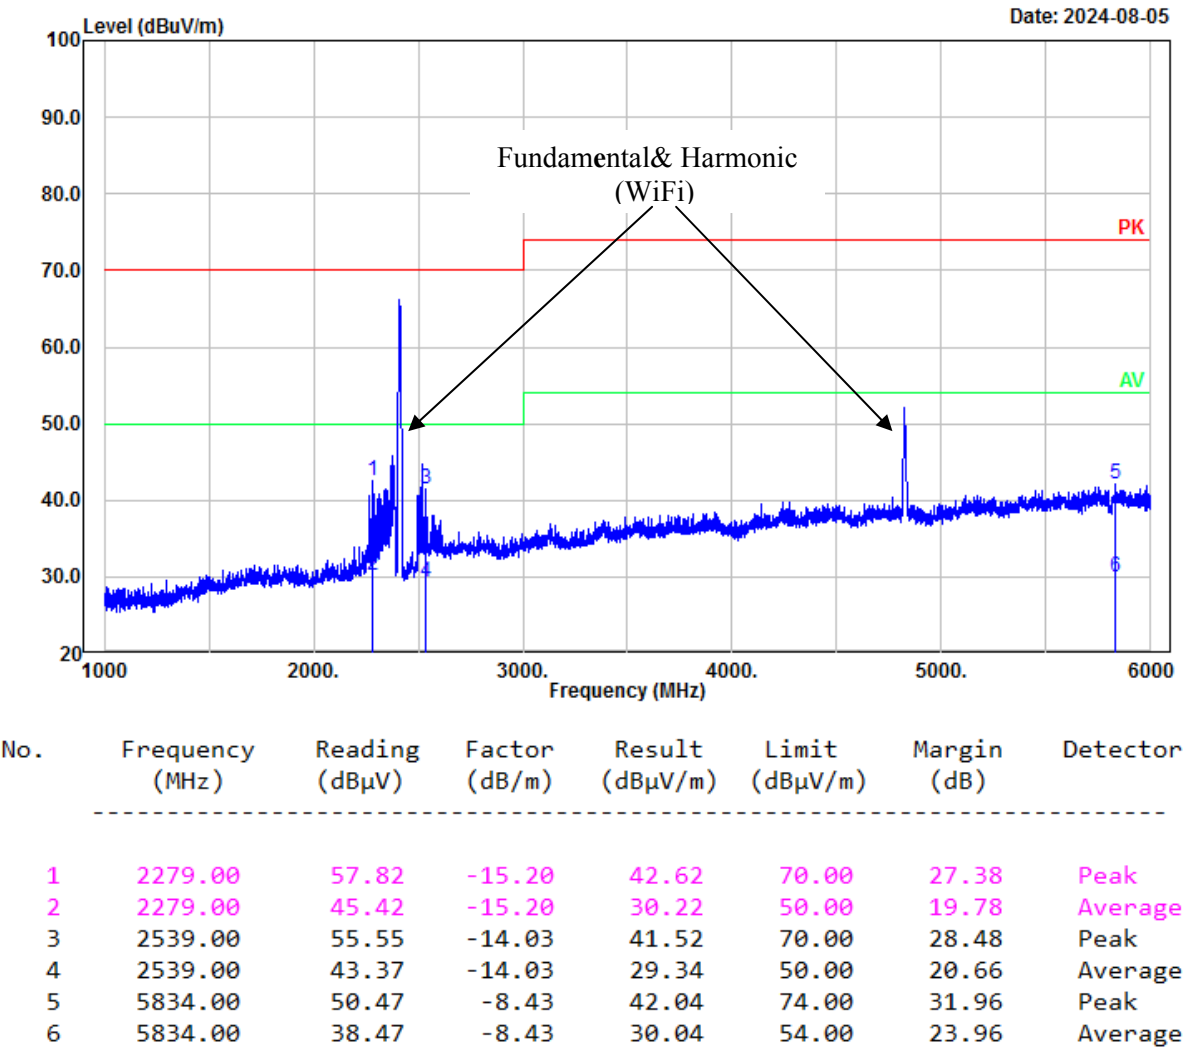


Project No.: 2402V87807E-RF  
Polarization: Horizontal  
Test Mode: M1  
Note: 230V 50Hz

Serial No.: 2P20-9  
Tester: Colin Yang

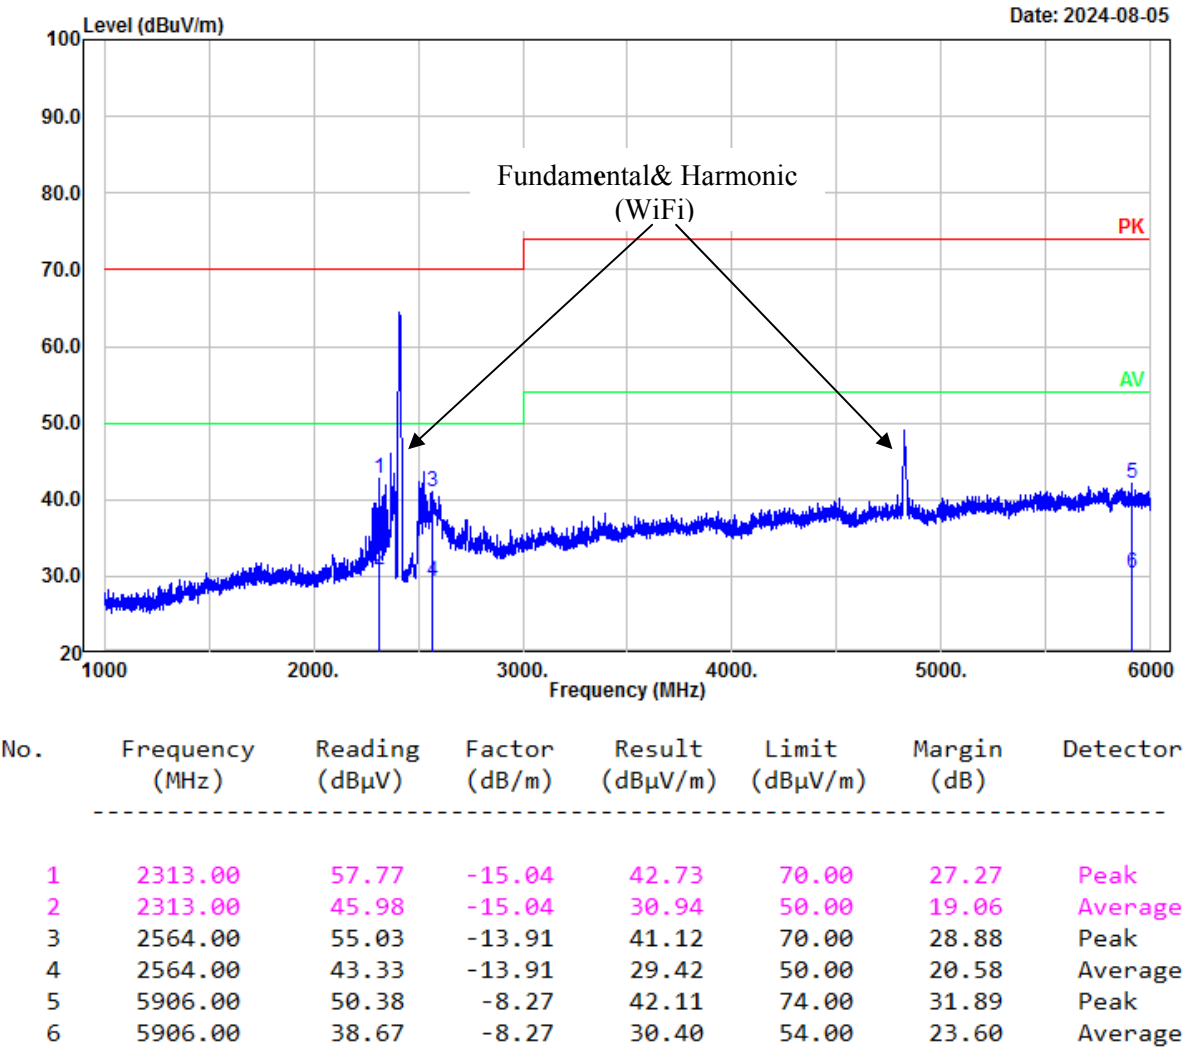

Project No.: 2402V87807E-RF  
Polarization: Horizontal  
Test Mode: M1  
Note: 110V 60Hz

Serial No.: 2P20-9  
Tester: Colin Yang

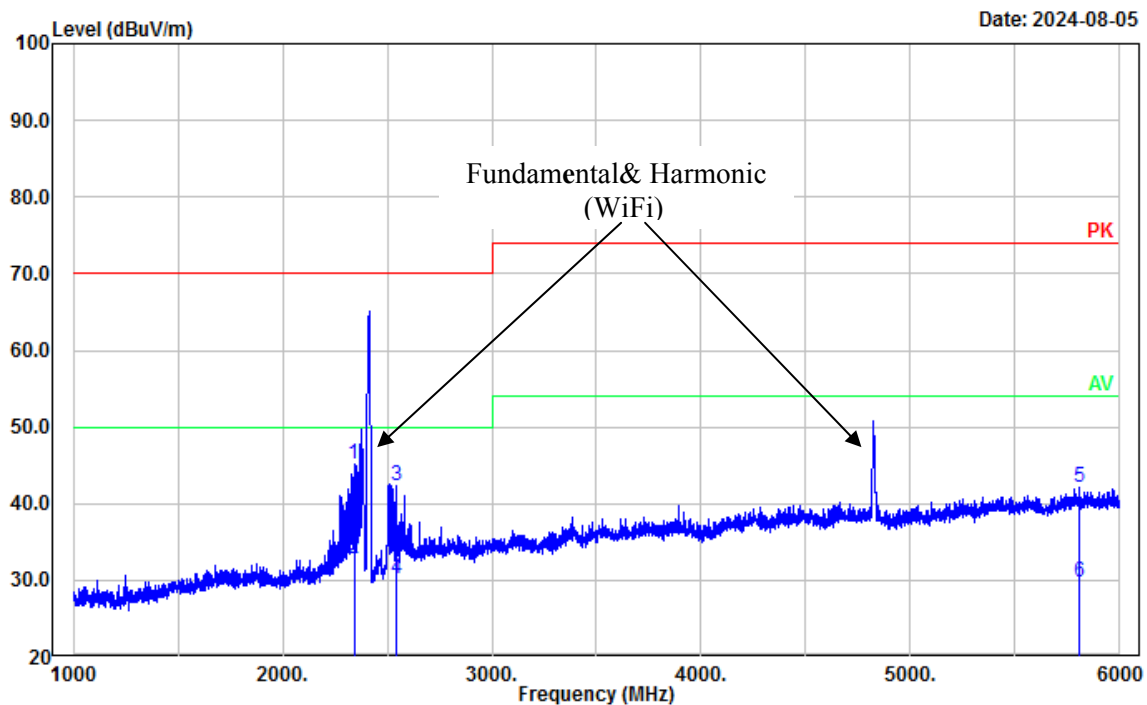


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	2341.00	59.95	-14.89	45.06	70.00	24.94	Peak
2	2341.00	47.62	-14.89	32.73	50.00	17.27	Average
3	2542.00	56.41	-14.01	42.40	70.00	27.60	Peak
4	2542.00	44.26	-14.01	30.25	50.00	19.75	Average
5	5808.00	50.51	-8.48	42.03	74.00	31.97	Peak
6	5808.00	38.19	-8.48	29.71	54.00	24.29	Average



Project No.: 2402V87807E-RF  
Polarization: Vertical  
Test Mode: M1  
Note: 110V 60Hz

Serial No.: 2P20-9  
Tester: Colin Yang

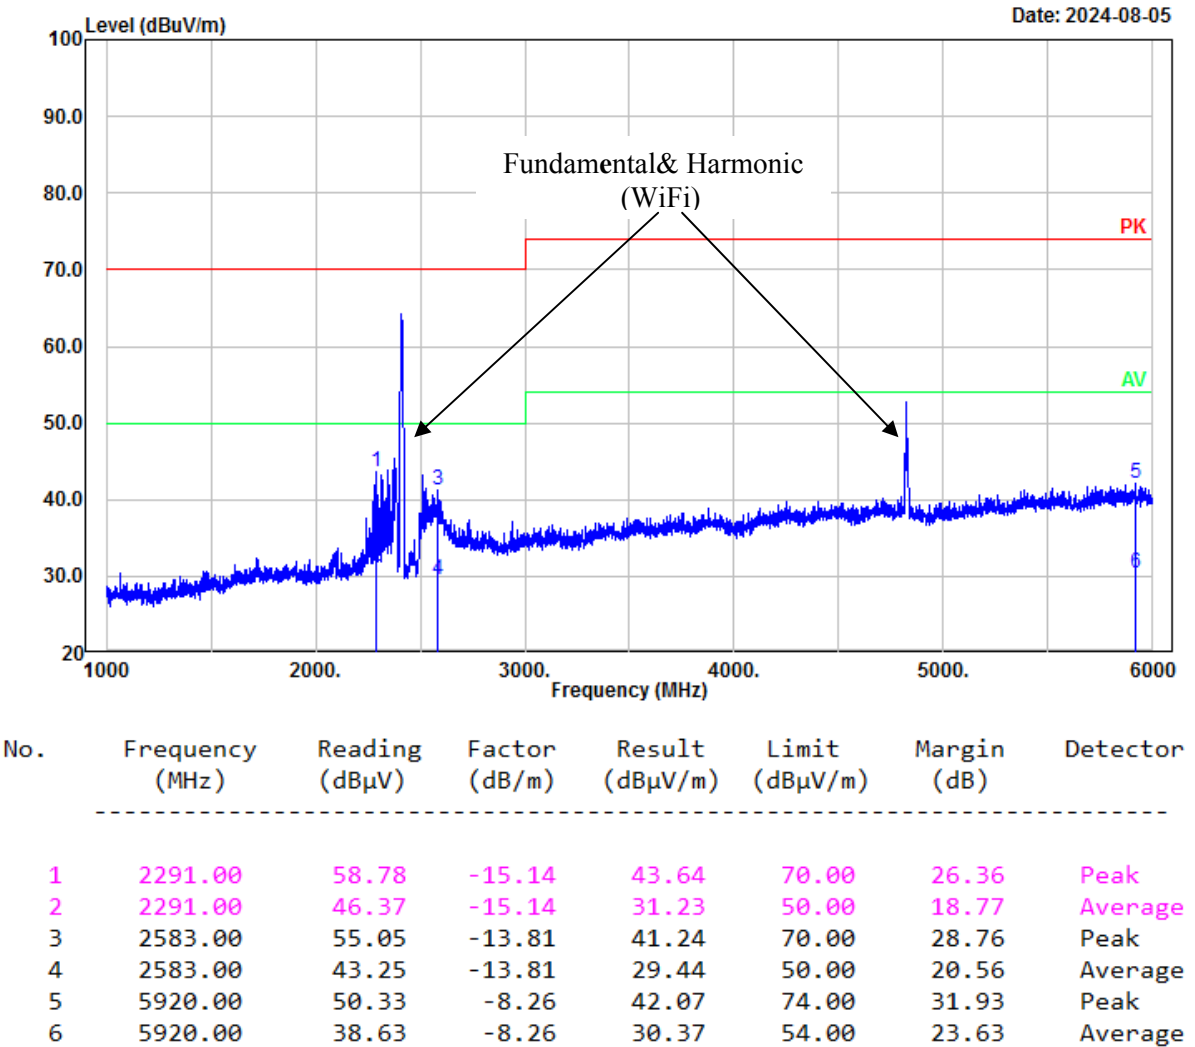

### 3 - AC MAINS POWER INPUT/OUTPUT PORTS

#### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.


Based on CISPR 16-4-2-2011\*, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz), and conducted disturbance at telecommunication port using AAN is 5.0 dB (150 kHz to 30 MHz).

**Table 1 - Values of  $U_{cispr}$**

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (9 kHz to 150 kHz)	3.8 dB
(150 kHz to 30 MHz)	3.4 dB
Conducted disturbance at mains port using voltage probe (9 kHz to 30 MHz)	2.9 dB
Conducted disturbance at telecommunication port using AAN (150 kHz to 30 MHz)	5.0 dB
Conducted disturbance at telecommunication port using CVP (150 kHz to 30 MHz)	3.9 dB
Conducted disturbance at telecommunication port using CP (150 kHz to 30 MHz)	2.9 dB

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

#### Test System Setup

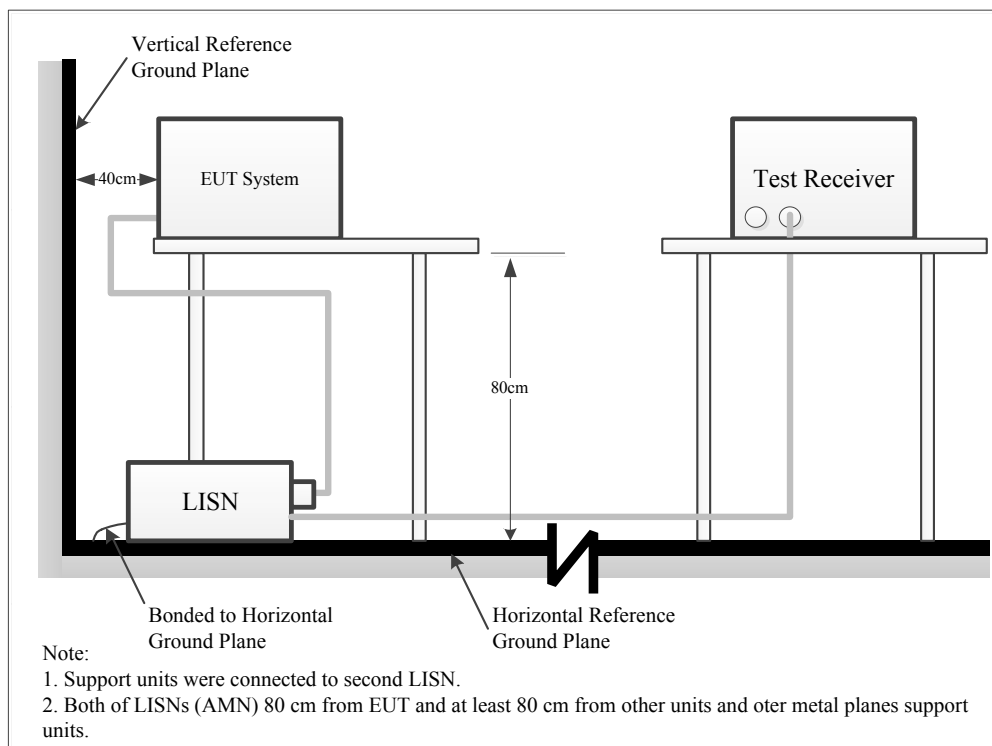

The setup of EUT is according with per EN 301 489-1 measurement procedures. The specification used was with the EN 301 489-1 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

The adapter was connected to AC230V/50Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz - 30 MHz	9 kHz

### Test Procedure

During the conducted emissions test, the adapter was connected to the main outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows: Result (QuasiPeak or Average) = Meter Reading + Corr.

Note:


Corr. = Cable loss + Factor of coupling device

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows: Margin = Limit -Result

## Test Data

Please refer to following table and plots:


Port: L  
 Test Mode: M1  
 Power Source: AC 110V/60Hz  
 Note: 2P2O-9

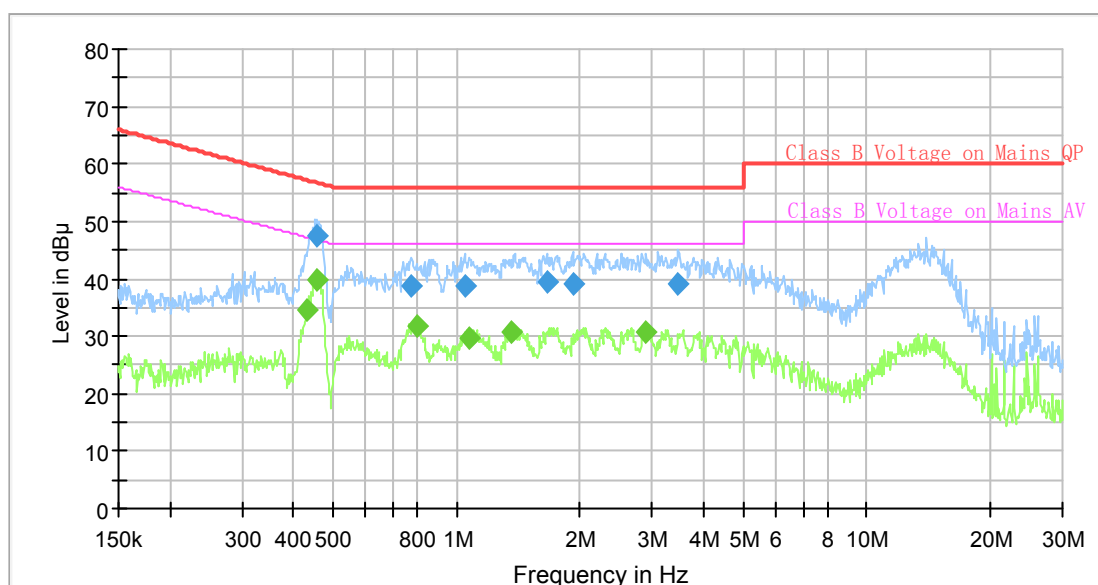

## Final Result

Frequency (MHz)	QuasiPeak	Average (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.431814	---	34.52	47.22	12.70	9.000	L1	10.8
0.456166	---	39.96	46.76	6.80	9.000	L1	10.8
0.456166	47.38	---	56.76	9.38	9.000	L1	10.8
0.773973	38.93	---	56.00	17.07	9.000	L1	10.9
0.797484	---	31.66	46.00	14.34	9.000	L1	10.9
1.049193	38.87	---	56.00	17.13	9.000	L1	10.8
1.070335	---	29.77	46.00	16.23	9.000	L1	10.8
1.353083	---	30.59	46.00	15.41	9.000	L1	10.8
1.660095	39.32	---	56.00	16.68	9.000	L1	10.8
1.918443	39.29	---	56.00	16.71	9.000	L1	10.8
2.902231	---	30.73	46.00	15.27	9.000	L1	10.8
3.473043	39.16	---	56.00	16.84	9.000	L1	10.8


Port: N  
 Test Mode: M1  
 Power Source: AC 120V/60Hz  
 Note: 2P2O-9

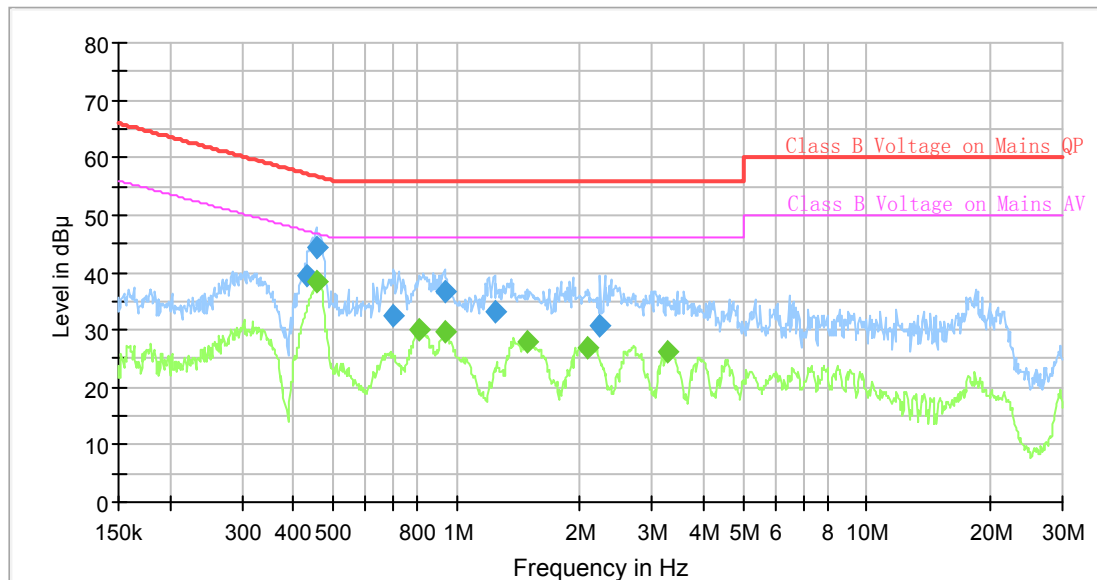

## Final Result

Frequency (MHz)	QuasiPeak	Average (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.431814	39.59	---	57.22	17.63	9.000	N	10.8
0.456166	44.29	---	56.76	12.47	9.000	N	10.8
0.456166	---	38.37	46.76	8.39	9.000	N	10.8
0.703996	32.65	---	56.00	23.35	9.000	N	10.8
0.813554	---	29.96	46.00	16.04	9.000	N	10.8
0.935483	---	29.55	46.00	16.45	9.000	N	10.8
0.935483	36.82	---	56.00	19.18	9.000	N	10.8
1.236902	33.06	---	56.00	22.94	9.000	N	10.9
1.487578	---	27.84	46.00	18.16	9.000	N	10.9
2.088199	---	27.04	46.00	18.96	9.000	N	10.9
2.239220	30.84	---	56.00	25.16	9.000	N	10.9
3.271278	---	26.10	46.00	19.90	9.000	N	10.9


Port: L  
 Test Mode: M1  
 Power Source: AC 110V/60Hz  
 Note: 2P2O-9

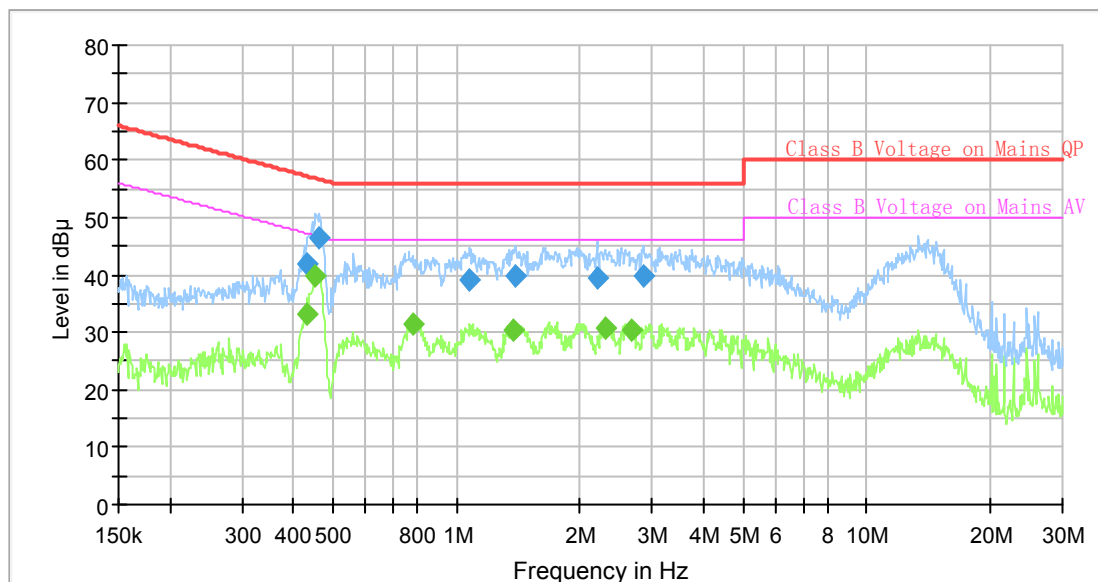

## Final Result

Frequency (MHz)	QuasiPea k	Average (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.429665	---	33.04	47.26	14.22	9.000	L1	10.8
0.431814	41.96	---	57.22	15.26	9.000	L1	10.8
0.453897	---	39.75	46.80	7.05	9.000	L1	10.8
0.463043	46.51	---	56.64	10.13	9.000	L1	10.8
0.781732	---	31.44	46.00	14.56	9.000	L1	10.9
1.075686	39.09	---	56.00	16.91	9.000	L1	10.8
1.373481	---	30.37	46.00	15.63	9.000	L1	10.8
1.394186	39.68	---	56.00	16.32	9.000	L1	10.8
2.205965	39.52	---	56.00	16.48	9.000	L1	10.8
2.295763	---	30.84	46.00	15.16	9.000	L1	10.8
2.666299	---	30.51	46.00	15.49	9.000	L1	10.8
2.859129	39.88	---	56.00	16.12	9.000	L1	10.8

Port: N  
 Test Mode: M1  
 Power Source: AC 110V/60Hz  
 Note: 2P2O-9

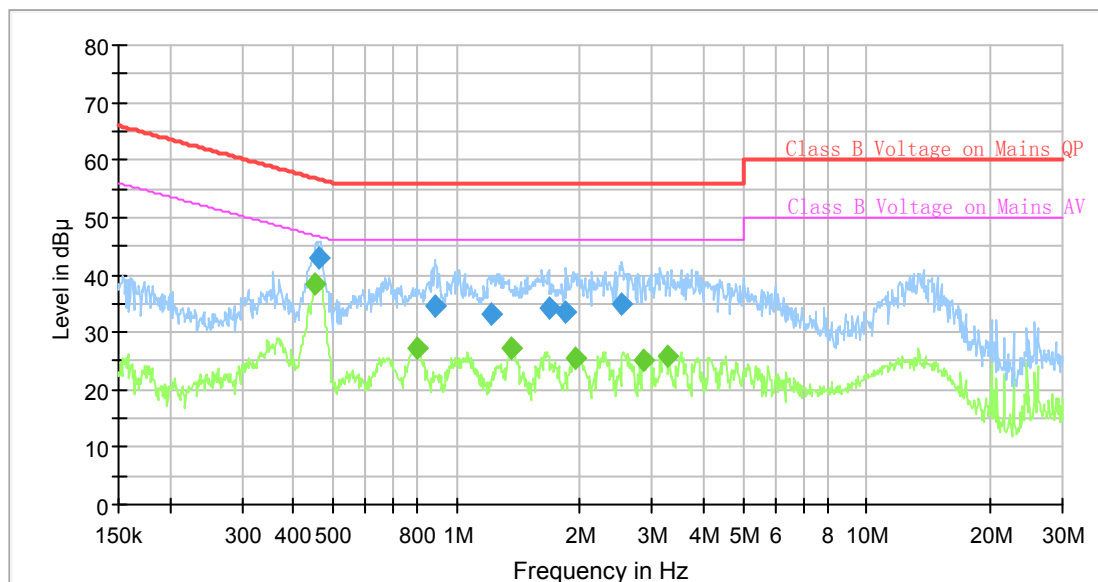


## Final Result

Frequency (MHz)	QuasiPea k	Average (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.451638	---	38.46	46.84	8.38	9.000	N	10.8
0.463043	42.95	---	56.64	13.69	9.000	N	10.8
0.801471	---	27.21	46.00	18.79	9.000	N	10.8
0.885542	34.66	---	56.00	21.34	9.000	N	10.8
1.218533	33.10	---	56.00	22.90	9.000	N	10.9
1.359849	---	27.14	46.00	18.86	9.000	N	10.9
1.676738	34.24	---	56.00	21.76	9.000	N	10.9
1.852620	33.70	---	56.00	22.30	9.000	N	10.9
1.947363	---	25.38	46.00	20.62	9.000	N	10.9
2.536578	34.99	---	56.00	21.01	9.000	N	10.9
2.844905	---	25.18	46.00	20.82	9.000	N	10.9
3.255003	---	25.70	46.00	20.30	9.000	N	10.9

## 5 - VOLTAGE FLUCTUATIONS AND FLICKER (AC MAINS INPUT PORT)

### Test System Setup

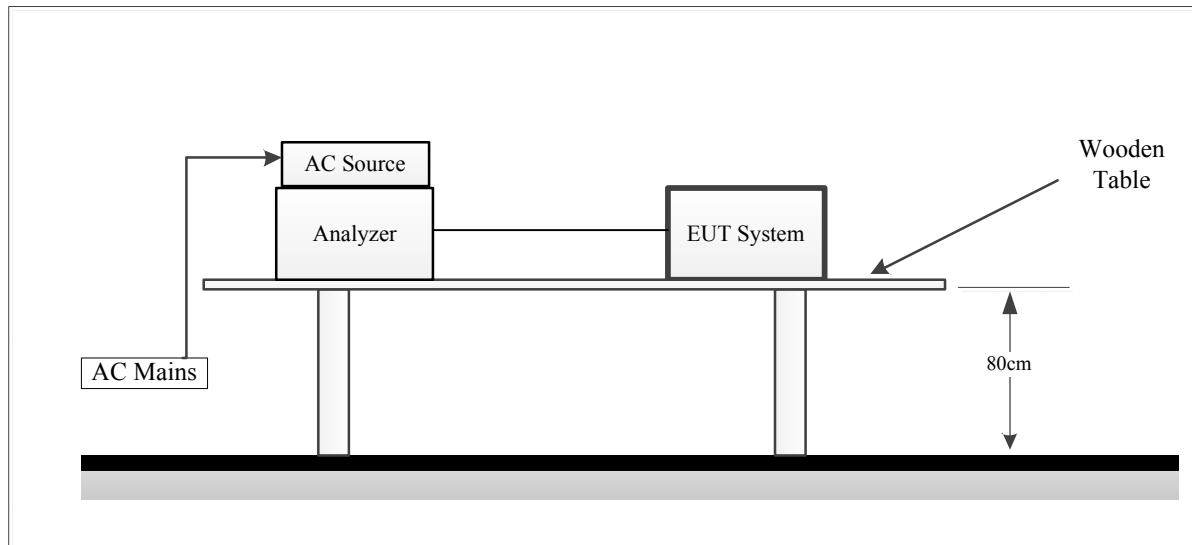

### Test Standard

EN 61000-3-3:2013+A1:2019+A2:2021

### Flicker Test Limits:

The limits shall be applicable to voltage fluctuations and flicker at the supply terminals of the equipment under test, measured or calculated according to clause 4 under test conditions described in clause 6 and annex A. Tests made to prove compliance with the limits are considered to be type tests.

The following limits apply:

- the value of Pst shall not be greater than 1,0;
- the value of Plt shall not be greater than 0,65;
- the value of d(t) during a voltage change shall not exceed 3,3 % for more than 500 ms;
- the relative steady-state voltage change, dc, shall not exceed 3,3 %;
- the maximum relative voltage change dmax, shall not exceed
  - a) 4 % without additional conditions;
  - b) 6 % for equipment which is:
    - switched manually, or
    - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

Note: The cycling frequency will be further limited by the Pst and Plt limit. For example: a dmax of 6 % producing a rectangular voltage change characteristic twice per hour will give a Plt of about 0,65.

- c) 7 % for equipment which is
  - attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
  - switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

In the case of equipment having several separately controlled circuits in accordance with 6.6, limits b) and c) shall apply only if there is delayed or manual restart after a power supply interruption; for all equipment with automatic switching which is energized immediately on restoration of supply after a power supply interruption, limits a) shall apply; for all equipment with manual switching, limits b) or c) shall apply depending on the rate of switching. Pst and Plt requirements shall not be applied to voltage changes caused by manual switching. The limits shall not be applied to voltage changes associated with emergency switching or emergency interruptions.



**Test Data**

*Please refer to following tables:*

Short time (Pst): 10 min  
Observation time: 120 min(12 Flicker measurement)  
Test Mode: M1: Operating &WIFI Link  
Power Source: AC 230V/50Hz  
Test Result PASS

**Maximum Flicker results**

	EUT values	Limit	Result
Pst	0.018	1.00	PASS
Plt	0.020	0.65	PASS
dc [%]	0.025	3.30	PASS
dmax [%]	0.246	4.00	PASS
dt [s]	0.000	0.50	PASS

## 6 - WIRED NETWORK PORTS

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.


Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz), and conducted disturbance at telecommunication port using AAN is 5.0 dB (150 kHz to 30 MHz).

**Table 1 - Values of  $U_{cispr}$**

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (9 kHz to 150 kHz)	3.8 dB
(150 kHz to 30 MHz)	3.4 dB
Conducted disturbance at mains port using voltage probe (9 kHz to 30 MHz)	2.9 dB
Conducted disturbance at telecommunication port using AAN (150 kHz to 30 MHz)	5.0 dB
Conducted disturbance at telecommunication port using CVP (150 kHz to 30 MHz)	3.9 dB
Conducted disturbance at telecommunication port using CP (150 kHz to 30 MHz)	2.9 dB

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

### Test System Setup

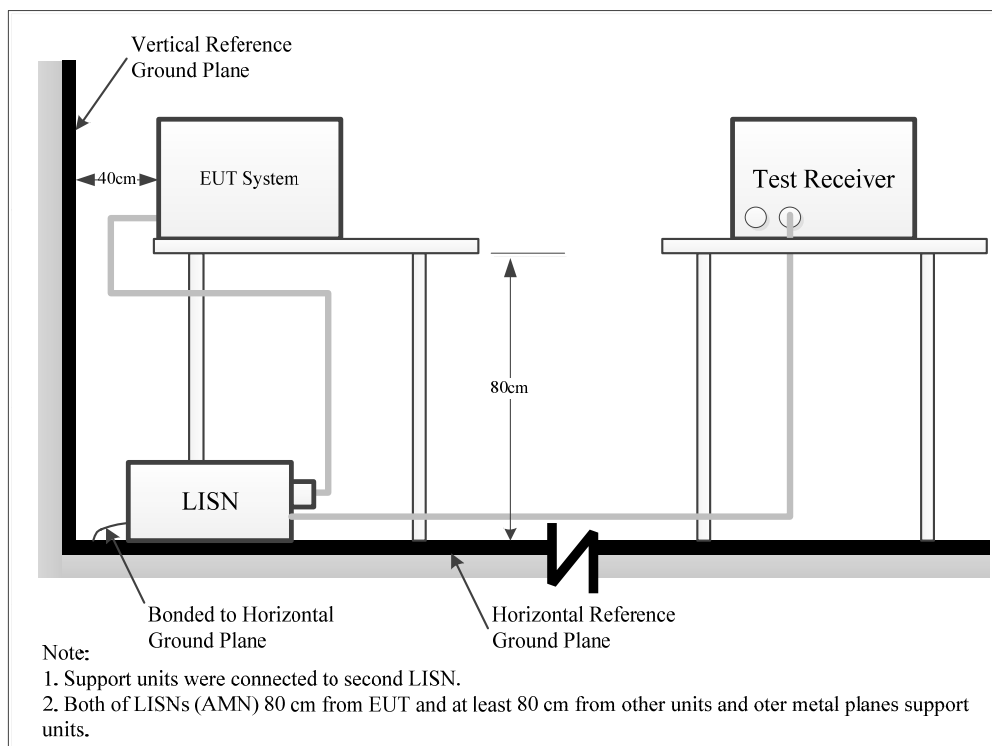

The setup of EUT is according with per EN 301 489-1 measurement procedures. The specification used was with the EN 301 489-1 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz - 30 MHz	9 kHz

### Test Procedure

During the conducted emissions test, the adapter was connected to the main outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows: Result (QuasiPeak or Average) = Meter Reading + Corr.

Note:


Corr. = Cable loss + Factor of coupling device

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows: Margin = Limit -Result

## Test Data

Please refer to following table and plots:


Port: RJ45  
 Test Mode: 10Mbps  
 Power Source: AC 230V/50Hz  
 Note: 2P2O-9

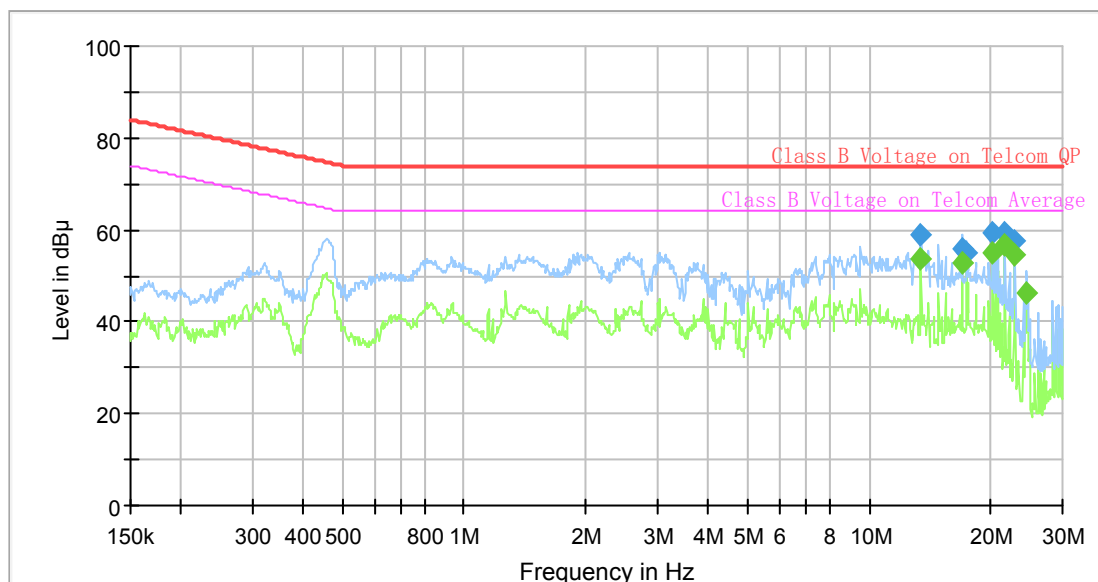

## Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
13.418776	58.76	---	74.00	15.24	9.000	Signal	9.6
13.418776	---	53.51	64.00	10.49	9.000	Signal	9.6
16.963591	55.70	---	74.00	18.30	9.000	Signal	9.7
16.963591	---	52.70	64.00	11.30	9.000	Signal	9.7
17.391943	55.03	---	74.00	18.97	9.000	Signal	9.7
20.199004	---	55.20	64.00	8.80	9.000	Signal	9.8
20.199004	59.53	---	74.00	14.47	9.000	Signal	9.8
21.659819	---	56.74	64.00	7.26	9.000	Signal	9.8
21.659819	59.47	---	74.00	14.53	9.000	Signal	9.8
22.881343	57.70	---	74.00	16.30	9.000	Signal	9.9
22.881343	---	54.41	64.00	9.59	9.000	Signal	9.9
24.536148	---	46.32	64.00	17.68	9.000	Signal	9.9

Port: RJ45  
 Test Mode: 100Mbps  
 Power Source: AC 230V/50Hz  
 Note: 2P2O-9

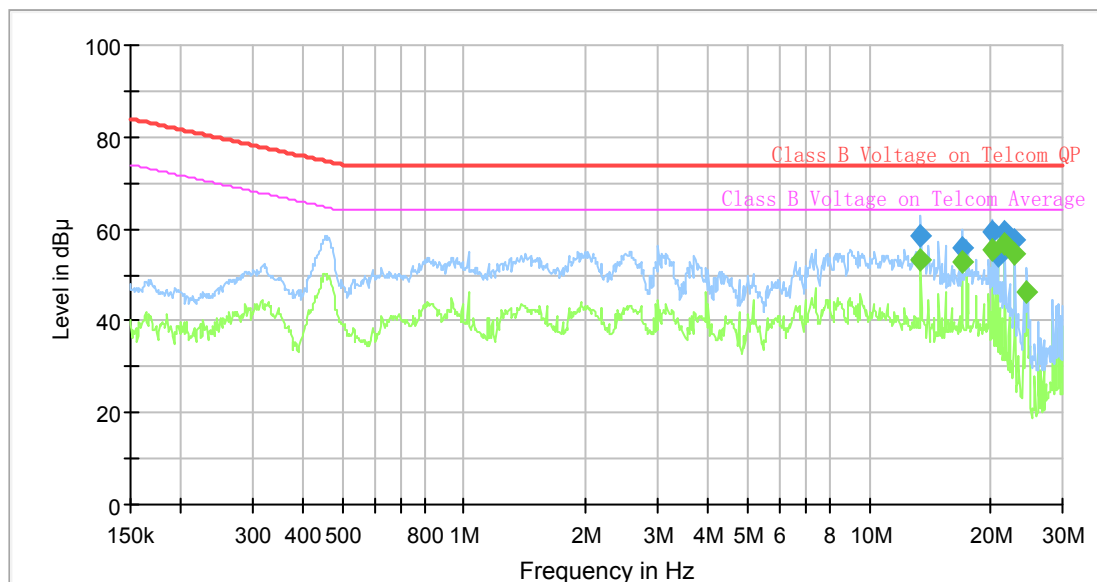

## Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
13.418776	58.64	---	74.00	15.36	9.000	Signal	9.6
13.418776	---	53.36	64.00	10.64	9.000	Signal	9.6
16.963591	55.97	---	74.00	18.03	9.000	Signal	9.7
16.963591	---	52.95	64.00	11.05	9.000	Signal	9.7
20.199004	---	55.25	64.00	8.75	9.000	Signal	9.8
20.199004	59.58	---	74.00	14.42	9.000	Signal	9.8
20.812600	54.05	---	74.00	19.95	9.000	Signal	9.8
21.659819	---	56.81	64.00	7.19	9.000	Signal	9.8
21.659819	59.47	---	74.00	14.53	9.000	Signal	9.8
22.881343	57.81	---	74.00	16.19	9.000	Signal	9.9
22.881343	---	54.50	64.00	9.50	9.000	Signal	9.9
24.536148	---	46.42	64.00	17.58	9.000	Signal	9.9

## 7 - RADIO FREQUENCY ELECTROMAGNETIC FIELDS (80 MHZ TO 6 000 MHZ)


### Measurement Uncertainty

$U_{lab}$  (measurement uncertainty of lab) and  $U_{EN}$  (measurement uncertainty of EN 61000-4-3) please refer to the following:

Parameter	$U_{EN}$	$U_{lab}$
Calibration process	1.88 dB	1.88 dB
Level setting	2.19 dB	2.19 dB

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

### Test System Setup

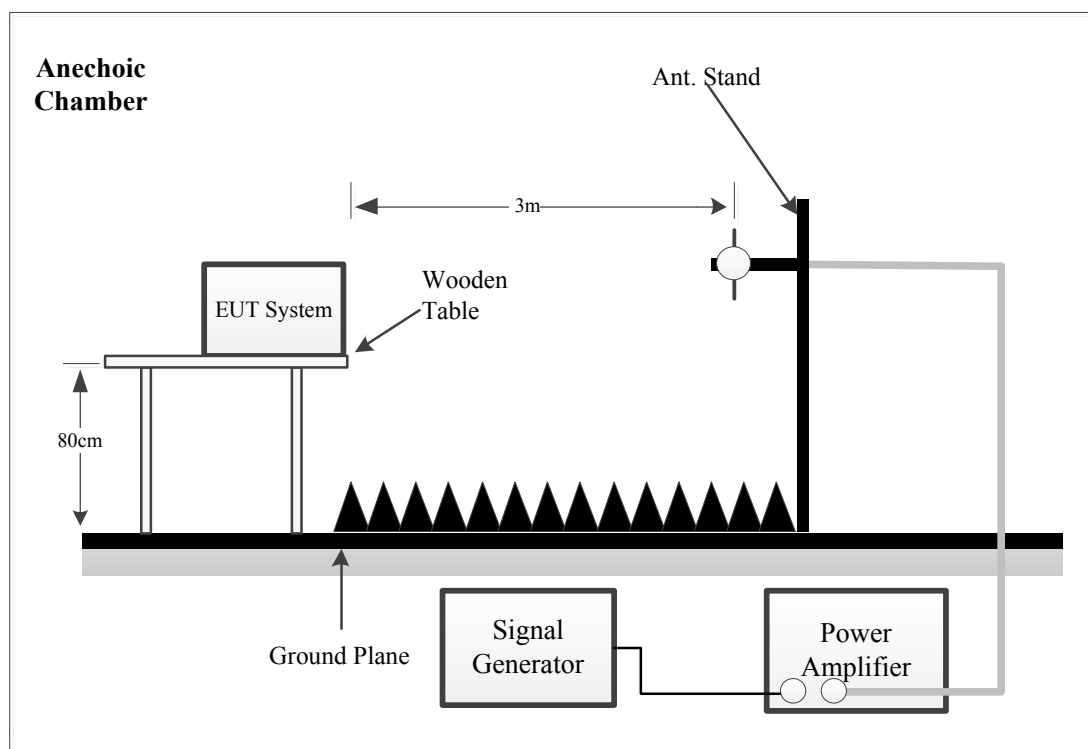

### Test Level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

### Performance Criterion: A

**General Performance Criteria:**

- A. The apparatus shall continue to operate as intended during and after the test. The manufacturer specifies some minimum performance level. The performance level may be specified by the manufacture as a permissible loss of performance.
- B. The apparatus shall continue to operate as intended after the test. This indicates that the EUT does not need to function at normal performance levels during the test, but must recover. Again some minimal performance is defined by the manufacture. No change in operating state or loss or data is permitted.
- C. Temporary loss of function is allowed. Operation of the EUT may stop as long as it is either automatically reset or can be manually restored by operation of the controls.
- D. The apparatus is broken, cannot be normal operated.

**Test Procedure**

The EUT and its simulators are placed on a turn table which is 0.8 meter above the ground. The EUT is set 3 meters away from the antenna which is mounted on an antenna tower. Both horizontal and vertical polarizations of the antenna are set on test. Each of the four sides of EUT must be faced this antenna and measured individually.

In order to judge the EUT performance, a CCD camera, UPV and Smartphone were used to monitor the EUT.

**Test Data**

*Please refer to following tables:*

**Test Mode:** M1

**Note:**

Condition of Test	Remarks
Field Strength	3 V/m
RF Signal	1 kHz, 80% AM, sine wave
Sweep Frequency Step	1 %, logarithmic
Dwell Time	1 Sec

**Table 1: Radiated RF-Electromagnetic Field Immunity, Swept Test**

Frequency Range (MHz)	Front Side		Rear Side		Left Side		Right Side		Top Side		Bottom Side	
	VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	A	A	A	A	A	A	A	A	A	A	A	A
1000-6000	A	A	A	A	A	A	A	A	A	A	A	A
Required Performance Criteria: A												
Description of Performance reduction: N/A												

## 8 - ELECTROSTATIC DISCHARGES


### Measurement Uncertainty

$U_{lab}$  (measurement uncertainty of lab) and  $U_{EN}$  (measurement uncertainty of EN 61000-4-2) please refer to the following:

Parameter	$U_{EN}$	$U_{lab}$
Rise time $t_r$	$\leq 15\%$	15%
Peak current $I_p$	$\leq 7\%$	6.3%
Current at 30 ns	$\leq 7\%$	6.3%
Current at 60 ns	$\leq 7\%$	6.3%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

### Test System Setup

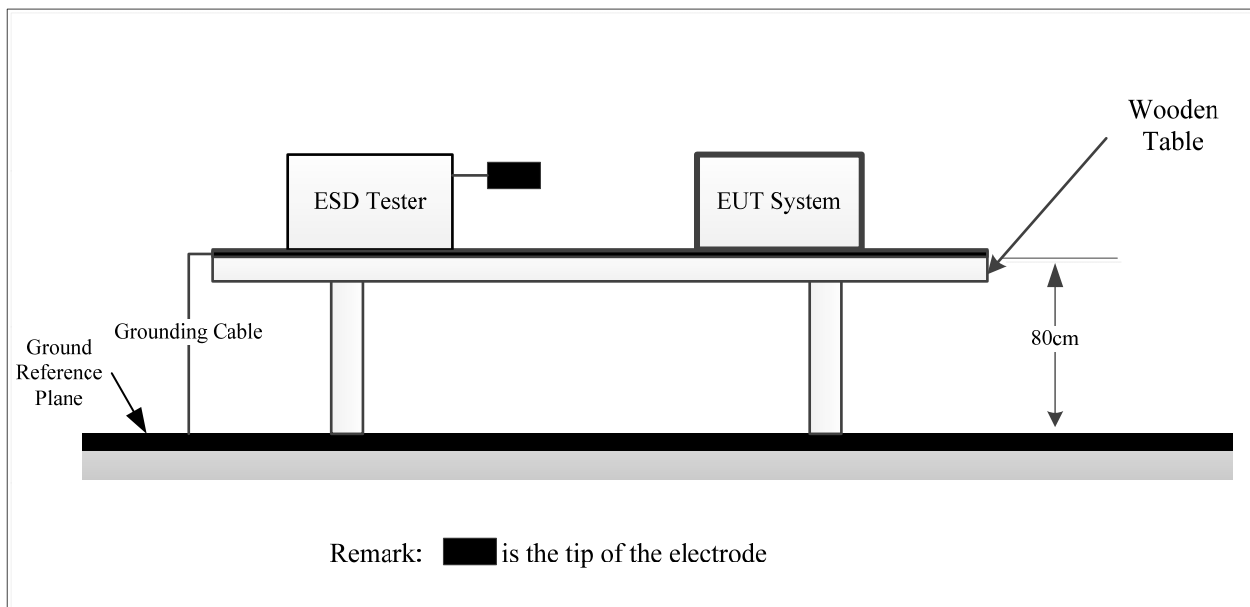

EN61000-4-2 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.6 by 0.8-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.



**Test Level**

Level	Test Voltage Contact Discharge ( $\pm$ kV)	Test Voltage Air Discharge ( $\pm$ kV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X.	Special	Special

**Performance criterion: B****Test Procedure****Air Discharge:**

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

**Contact Discharge:**

All the procedure shall be same as Section 8.3.1 of IEC 61000-4-2, except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

**Indirect discharge for horizontal coupling plane:**

At least 10 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

**Indirect discharge for vertical coupling plane:**

At least 10 single discharges shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions  $0.5\text{m} \times 0.5\text{m}$ , is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

## Test Data

Please refer to following tables:

**Test Mode:** M1

**Note:** Adapter 1#, 2#

**Table 1: Electrostatic Discharge Immunity (Air Discharge)**

Test Points Location	Test Level							
	-2 kV	+2 kV	-4 kV	+4 kV	-8 kV	+8 kV	-15 kV	+15 kV
Non-metallic Shell	A	A	A	A	A	A	/	/
DC Port	A	A	A	A	A	A	/	/
Seam	A	A	A	A	A	A	/	/
Camera	A	A	A	A	A	A	/	/
DC Cable	A	A	A	A	A	A	/	/
Adapter	A	A	A	A	A	A	/	/
Required Performance Criteria:B								
Description of Performance reduction: N/A								

**Table 2: Electrostatic Discharge Immunity (Direct Contact)**

Test Points Location	Test Level							
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV
Screw	A	A	A	A	/	/	/	/
Required Performance Criteria:B								
Description of Performance reduction: N/A								


**Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)**


Test Points Location	Test Level							
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV
Front Side	A	A	A	A	/	/	/	/
Back Side	A	A	A	A	/	/	/	/
Left Side	A	A	A	A	/	/	/	/
Right Side	A	A	A	A	/	/	/	/
Top Side	A	A	A	A	/	/	/	/
Bottom Side	A	A	A	A	/	/	/	/
Required Performance Criteria:B								
Description of Performance reduction: N/A								


**Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)**

Test Points Location	Test Level							
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV
Front Side	A	A	A	A	/	/	/	/
Back Side	A	A	A	A	/	/	/	/
Left Side	A	A	A	A	/	/	/	/
Right Side	A	A	A	A	/	/	/	/
Required Performance Criteria:B								
Description of Performance reduction: N/A								

ESD Location Photo

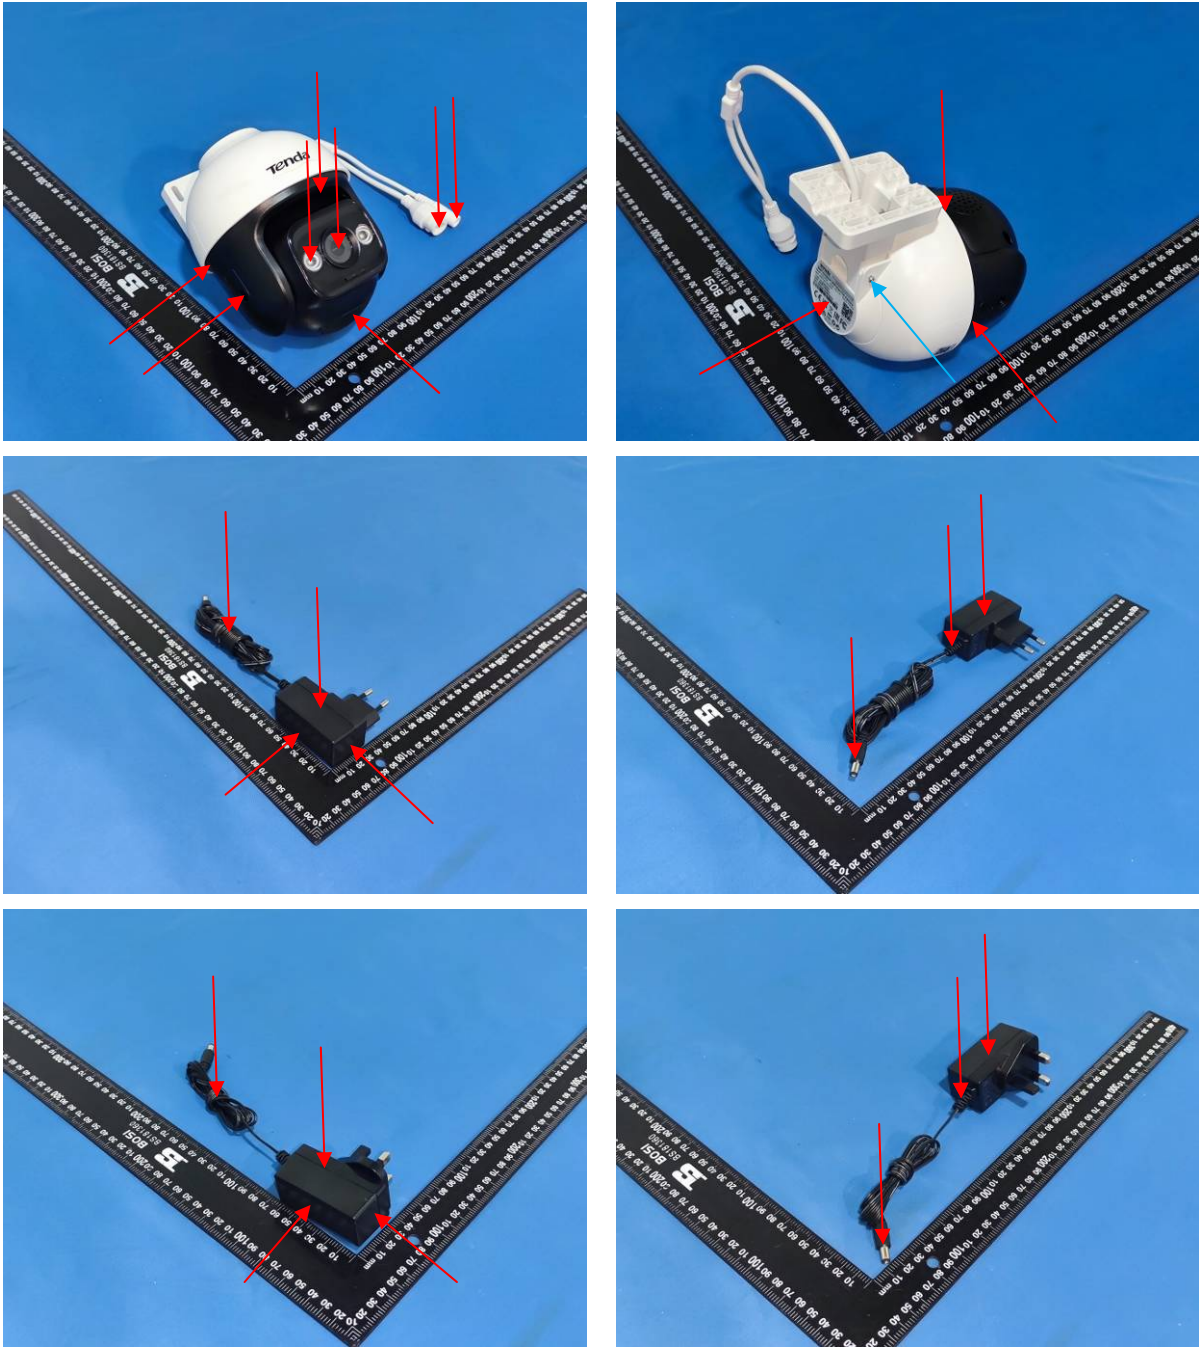

Air Discharge: 

Direct Contact: 

## 9 - FAST TRANSIENTS, COMMON MODE


### Measurement Uncertainty

$U_{lab}$  (measurement uncertainty of lab) and  $U_{EN}$  (measurement uncertainty of EN 61000-4-4) please refer to the following:

Parameter	$U_{EN}$	$U_{lab}$
Rise time $t_r$	6.20%	6.20%
Peak voltage value $V_p$	8.60%	8.60%
Voltage pulse width $t_w$	5.90%	5.90%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

### Test System Setup

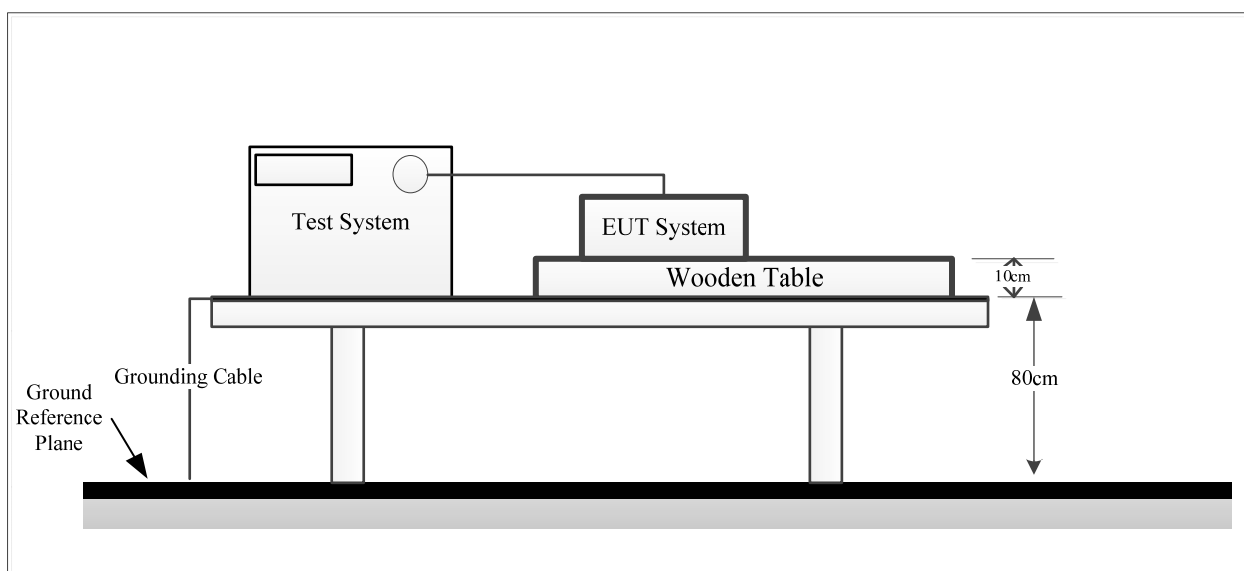

### Test Level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special

Performance Criterion: B

## Test Procedure

The EUT was arranged for Power Line Coupling and for I/O Line Coupling through a capacitive clamp, where applicable. (Note: The I/O coupling test using a capacitive clamp is performed on the I/O interface cables that are longer in length than 3 meters.) A metal ground plane 2.4 meter by 2.0 meter was placed between the floor and the table and is connected to the earth by a 2.0 meter ground rod. The ground rod is connected to the test facility's electrical earth.

## Test Data

Please refer to following tables:

**Test Mode:** M1

**Note:**

### AC Mains Power Input Ports

Test Line	Test Level (kV)							
	+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
L	A	A	A	A	/	/	/	/
N	A	A	A	A	/	/	/	/
Earth	/	/	/	/	/	/	/	/
L+N	A	A	A	A	/	/	/	/
L + Earth	/	/	/	/	/	/	/	/
N + Earth	/	/	/	/	/	/	/	/
L+N+Earth	/	/	/	/	/	/	/	/
Required Performance Criteria: B								
Description of Performance reduction: N/A								

### Signal Ports:

Test Ports	Test Level (kV)							
	+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
RJ45	A	A	/	/	/	/	/	/
Required Performance Criteria: B								
Description of Performance reduction: N/A								

## 10 - RADIO FREQUENCY, COMMON MODE


### Measurement Uncertainty

$U_{\text{lab}}$  (measurement uncertainty of lab) and  $U_{\text{EN}}$  (measurement uncertainty of EN 61000-4-6) please refer to the following:

Parameter	$U_{\text{EN}}$	$U_{\text{lab}}$
CDN calibration process	1.27 dB	1.27 dB
CDN test process	1.36 dB	1.36 dB

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

### Test System Setup

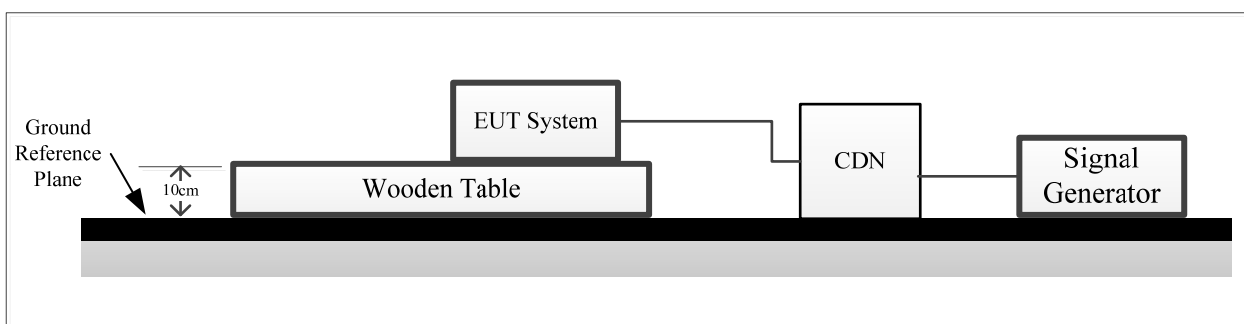

### Test Level

Level	Voltage Level (r.m.s.) ( $U_0$ )
1	1
2	3
3	10
X	Special

Performance Criterion: A

## Test Procedure

- 1) Let the EUT work in test mode and test it.
- 2) The EUT are placed on an insulating support 0.1 m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3 m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 3) The disturbance signal described below is injected to EUT through CDN.
- 4) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 5) The frequency range is swept from 150 kHz to 80 MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1 kHz sine wave.
- 6) Where the frequency is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value. The dwell time of the amplitude modulated carrier at each frequency shall not be less than the time necessary for the EUT to be exercised and to respond, but shall in no case be less than 0.5 s.
- 7) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

## Test Data

Please refer to following tables:

**Test Mode:** M1

**Note:**

**Table 1: AC mains power input port**


Signal Type	Frequency Range (MHz)	Voltage Level (r.m.s.)	Perform Criterion
Modulation: Amplitude 80%, 1kHz sine wave Dwell Time 1 Sec	0.15-80	3V	A
Required Performance Criteria: A Description of Performance reduction: N/A			

**Table 2: Signal Port :RJ45**

Signal Type	Frequency Range (MHz)	Voltage Level (r.m.s.)	Perform Criterion
Modulation: Amplitude 80%, 1kHz sine wave Dwell Time 1 Sec	0.15-80	3V	A
Required Performance Criteria: A Description of Performance reduction: N/A			

12 - VOLTAGE DIPS AND SHORT INTERRUPTIONS

Test System Setup

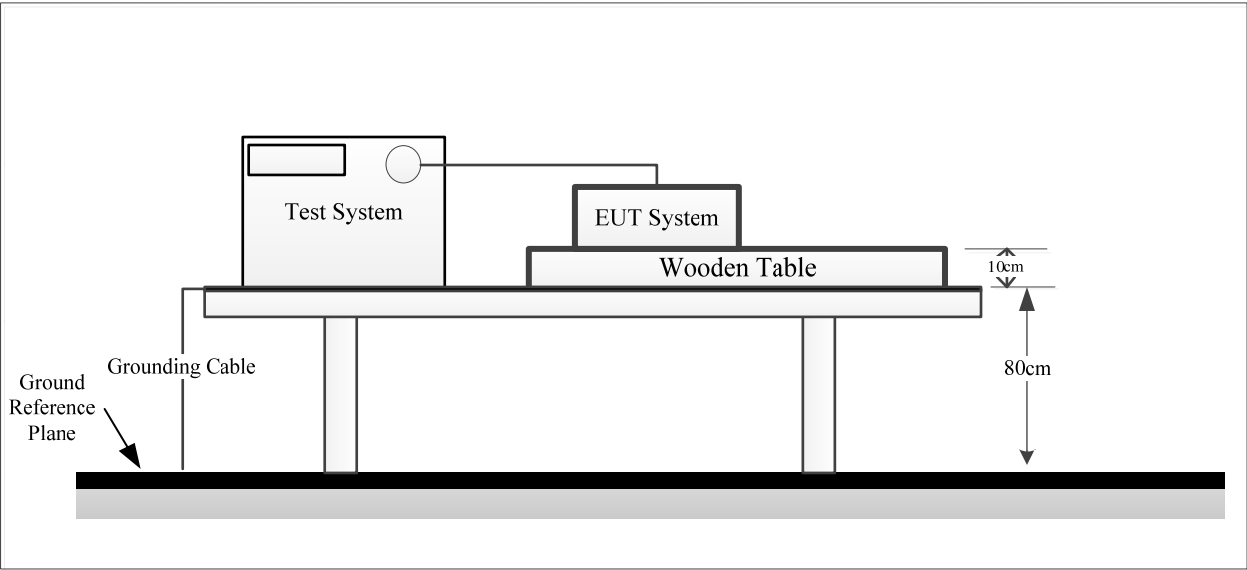

Test Level and Performance Criterion

Test Level	Voltage dip and short interruptions (% ) Residual	Duration (in period)	Performance criterion
1	0	0.5	B
2	0	1	B
3	70	25	C
4	0	250	C

Test Procedure

- 1) The interruption is introduced at selected phase angles with specified duration.
- 2) Record any degradation of performance.



**Test Data**

*Please refer to following tables:*

**Test Mode:** M1

**Note:**

**Table 1: Voltage Dips/Interruptions Test**


Residual Voltage (%)	Td (Number of cycles)	Phase Angle (°)	N	Result	Required Performance Criteria
0	0.5	0/90/180/270	3	A	B
0	1	0/90/180/270	3	A	B
70	25	0/90/180/270	3	A	C
0	250	0/90/180/270	3	B	C

Description of Performance reduction:

B indicates that the power supply of the EUT was interrupted during the test, and the EUT was restarted. After the test, it can automatically return to normal use.

## 13 - SURGES

### Test System Setup

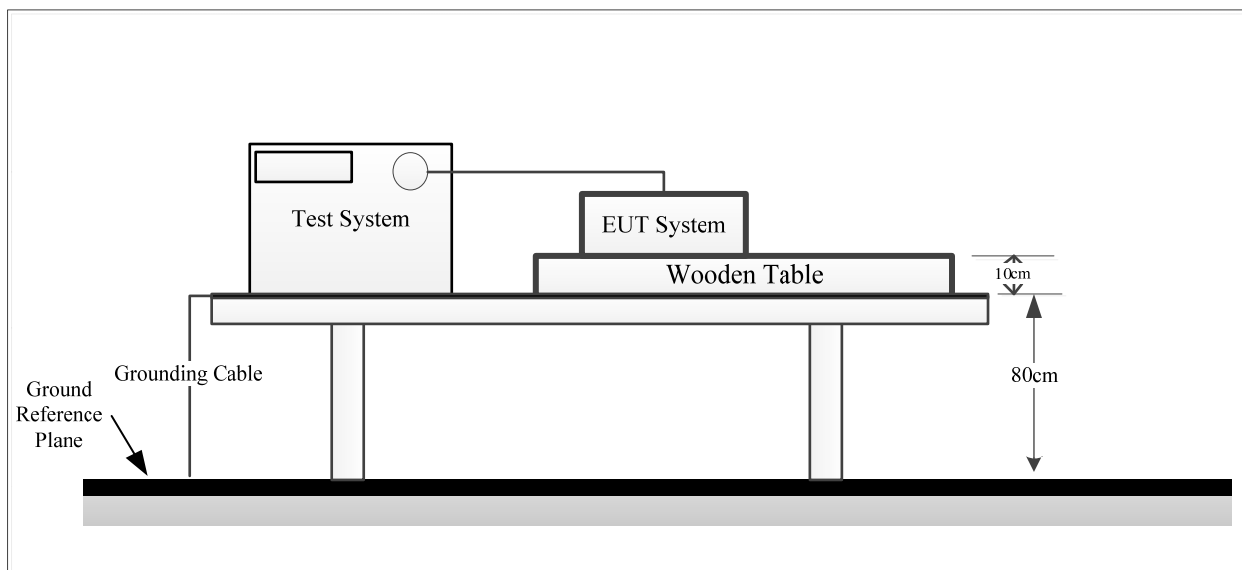

### Test Level

Level	Open Circuit Output Test Voltage $\pm 10\%$
1	0.5 kV
2	1 kV
3	2 kV
4	4 kV
X	Special

### Performance Criterion: B

### Test Procedure

- 1) For line to line coupling mode, provide a 0.5 kV 1.2/50us voltage surge (at open-circuit condition).
- 2) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 3) Different phase angles are done individually.
- 4) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

**Test Data**

Please refer to following tables:

**Test Mode:** M1

**Note:**

**Table 1: AC mains power input port**

No.	Voltage	Poll	Path	Phase Angle	Perform Criterion
1	0.5kV	+	L- N	0/90/180/270	A
1	0.5kV	-	L- N	0/90/180/270	A
2	1kV	+	L- N	0/90/180/270	A
2	1kV	-	L- N	0/90/180/270	A
Required Performance Criteria: B Description of Performance reduction: N/A					


**Table 2: RJ45 I/O Circuit and Lines**

No.	Voltage	Poll	Path	Perform Criterion
1	0.5kV	±	Line-Ground	A
2	1kV	±	Line-Ground	A
Required Performance Criteria: C Description of Performance reduction: N/A				

## EXHIBIT A - EUT PHOTOGRAPHS

Model: CH3-WCA



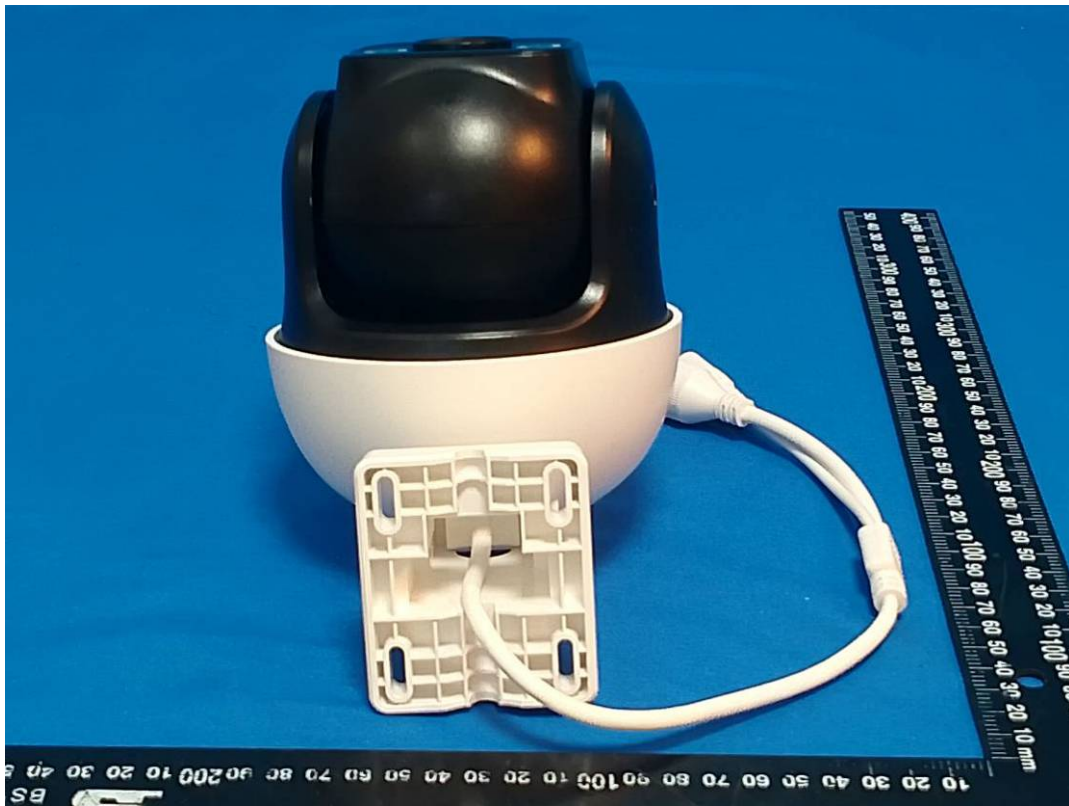















Uncover





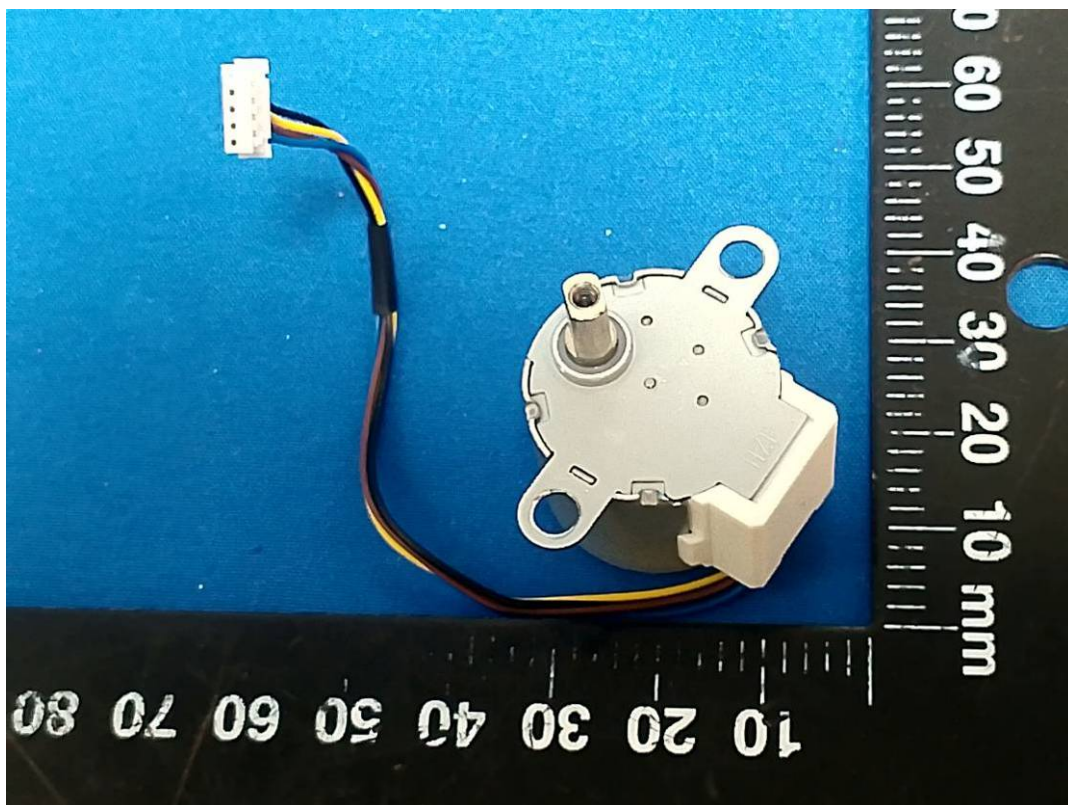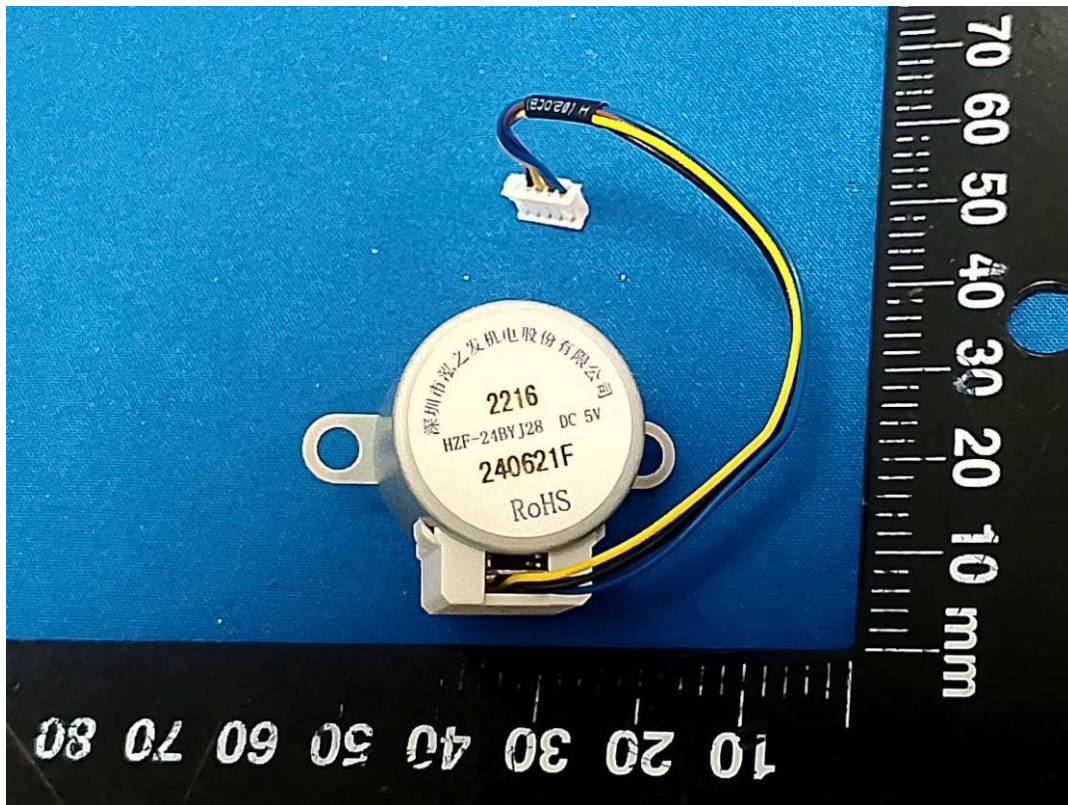










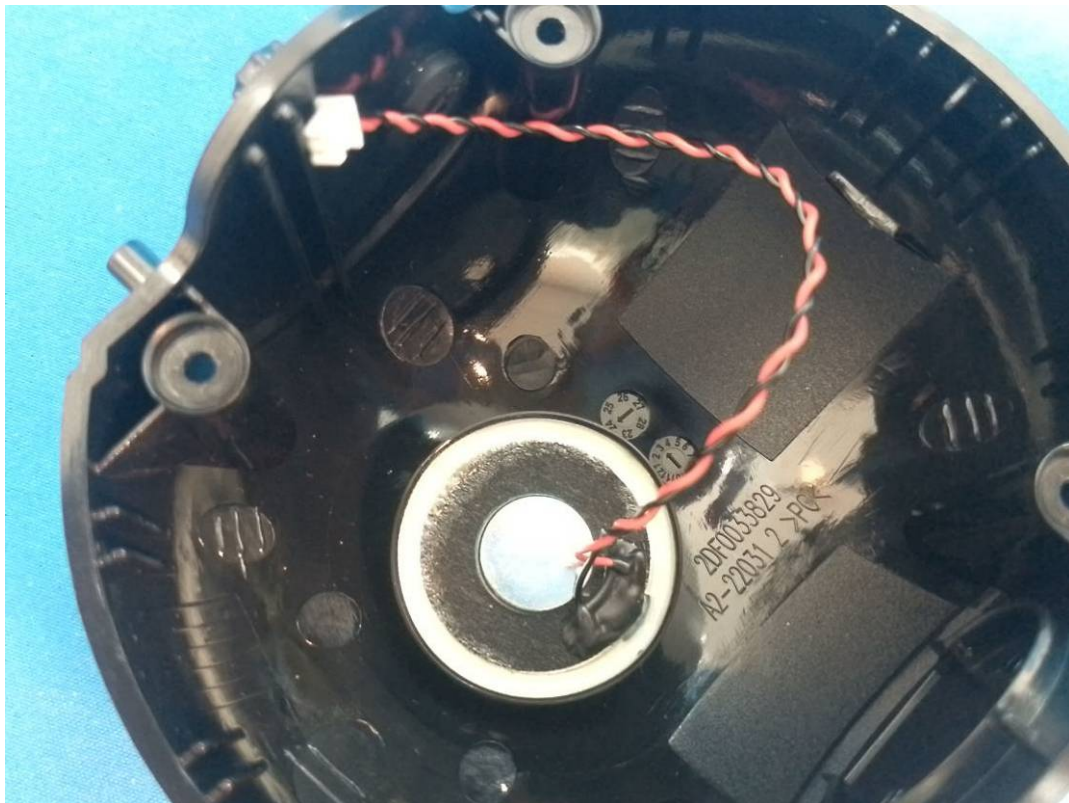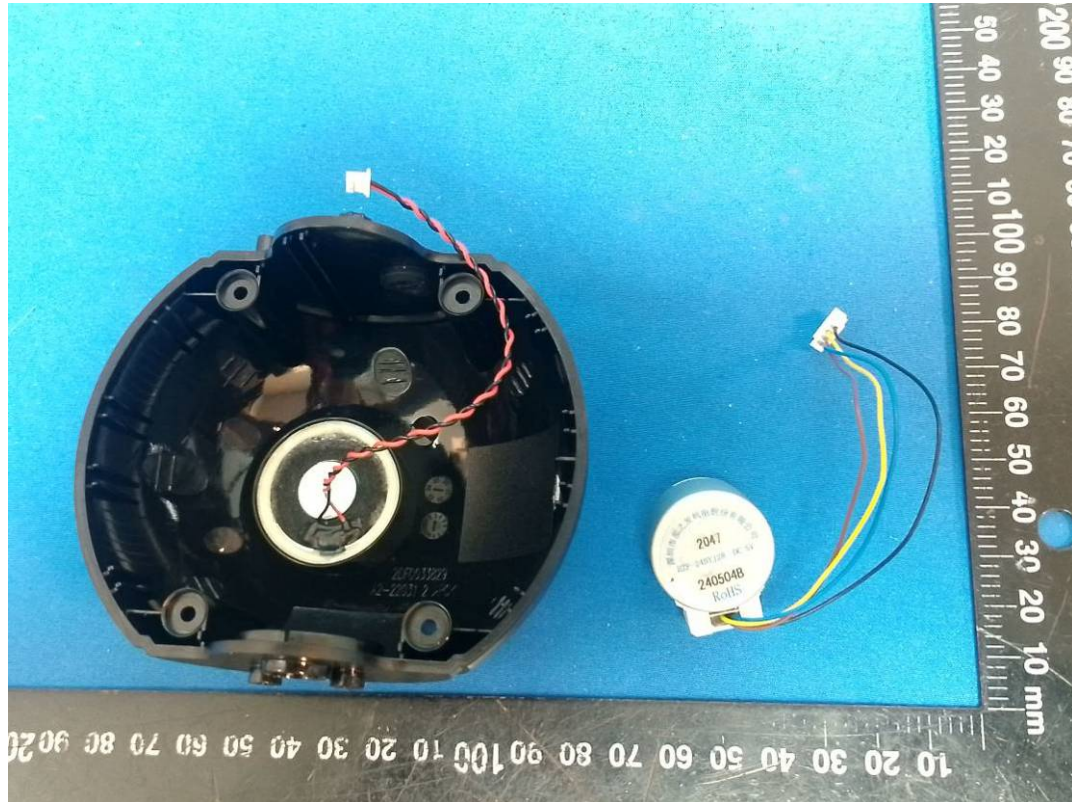






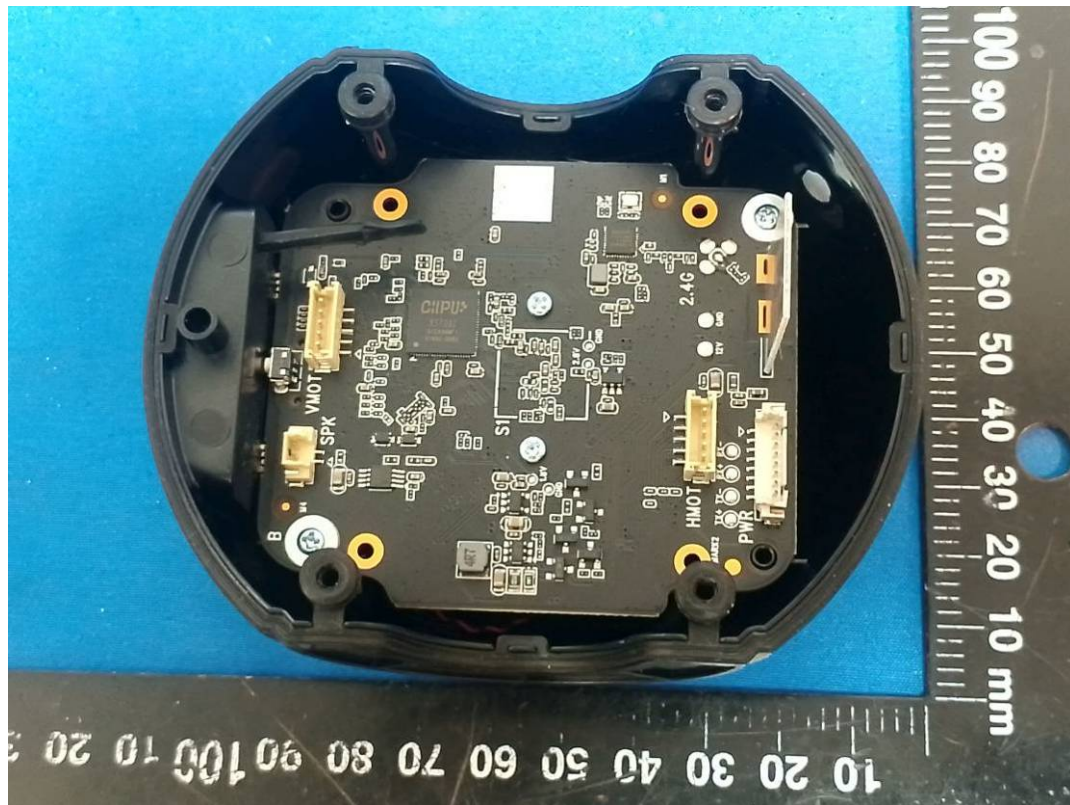




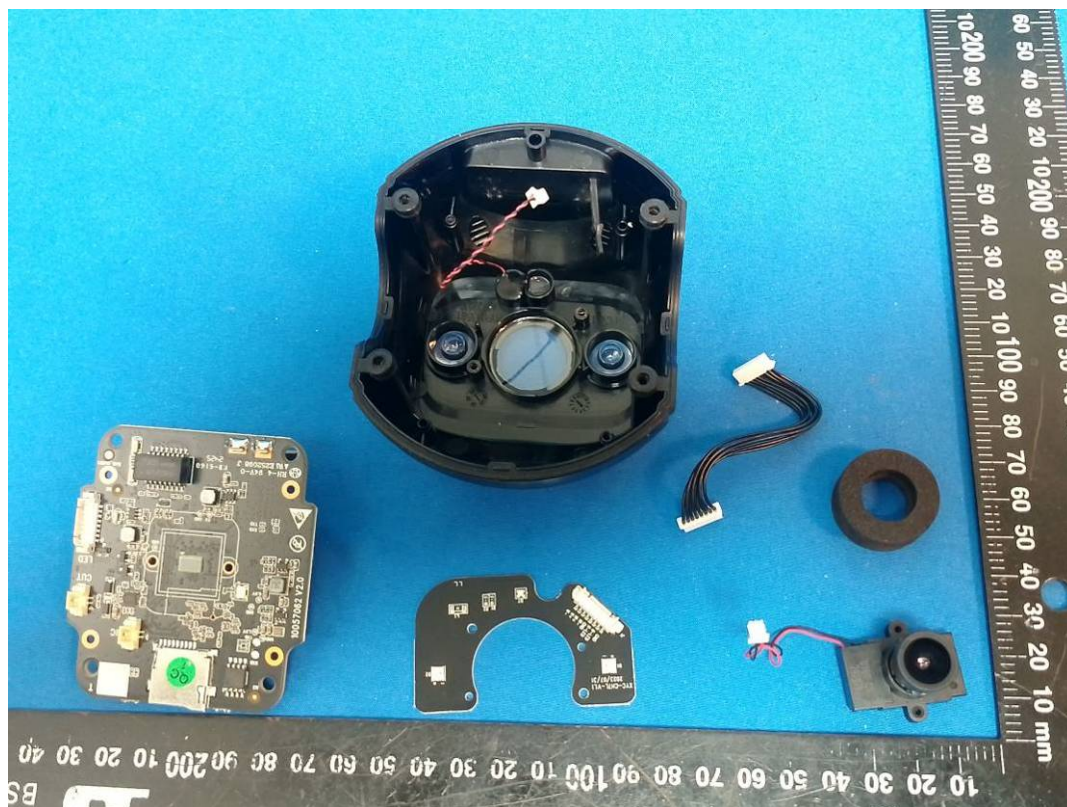
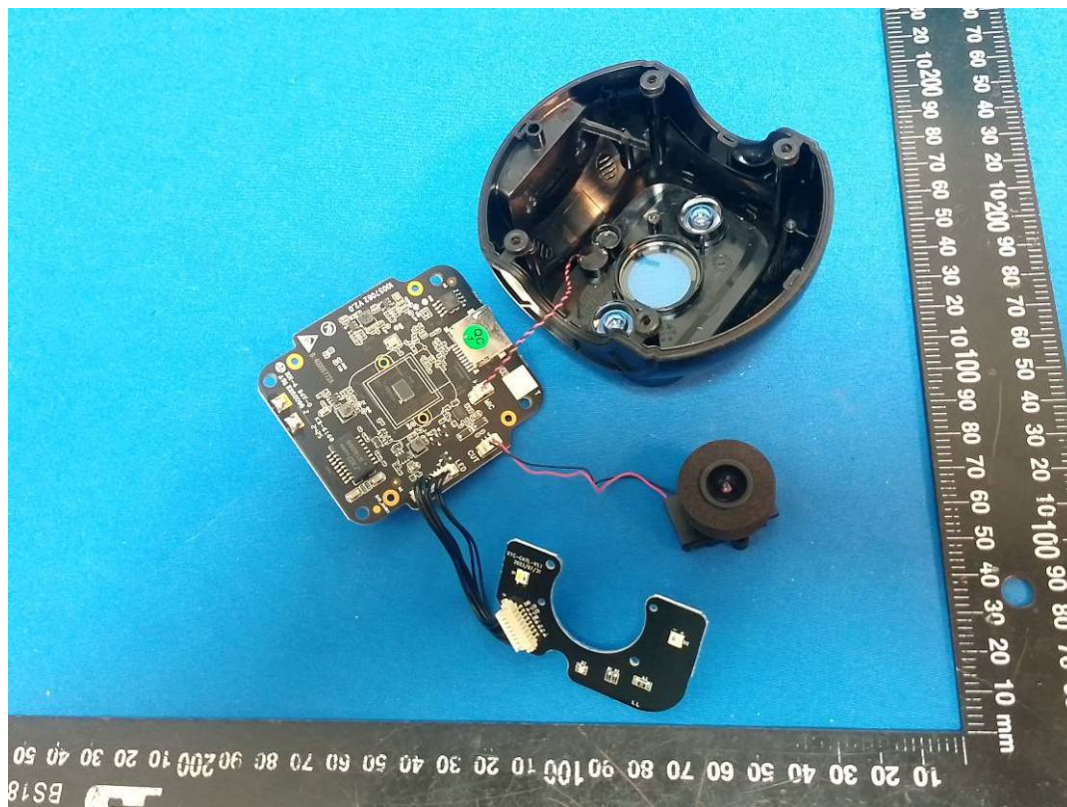




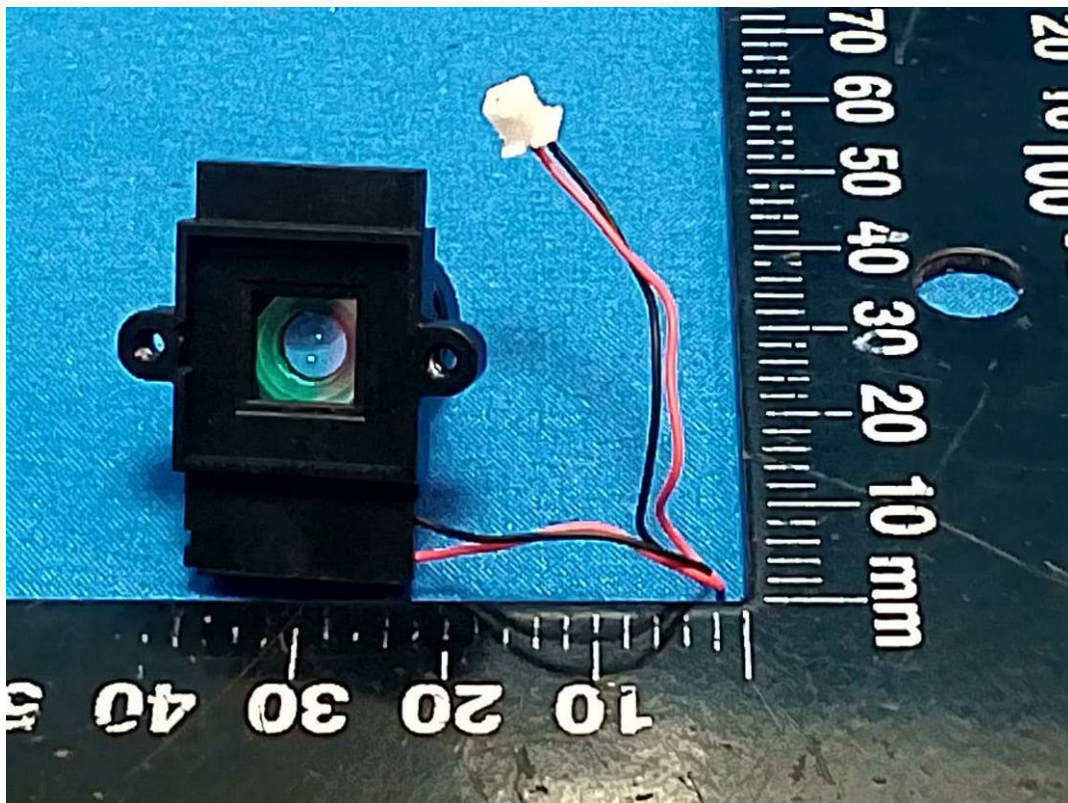
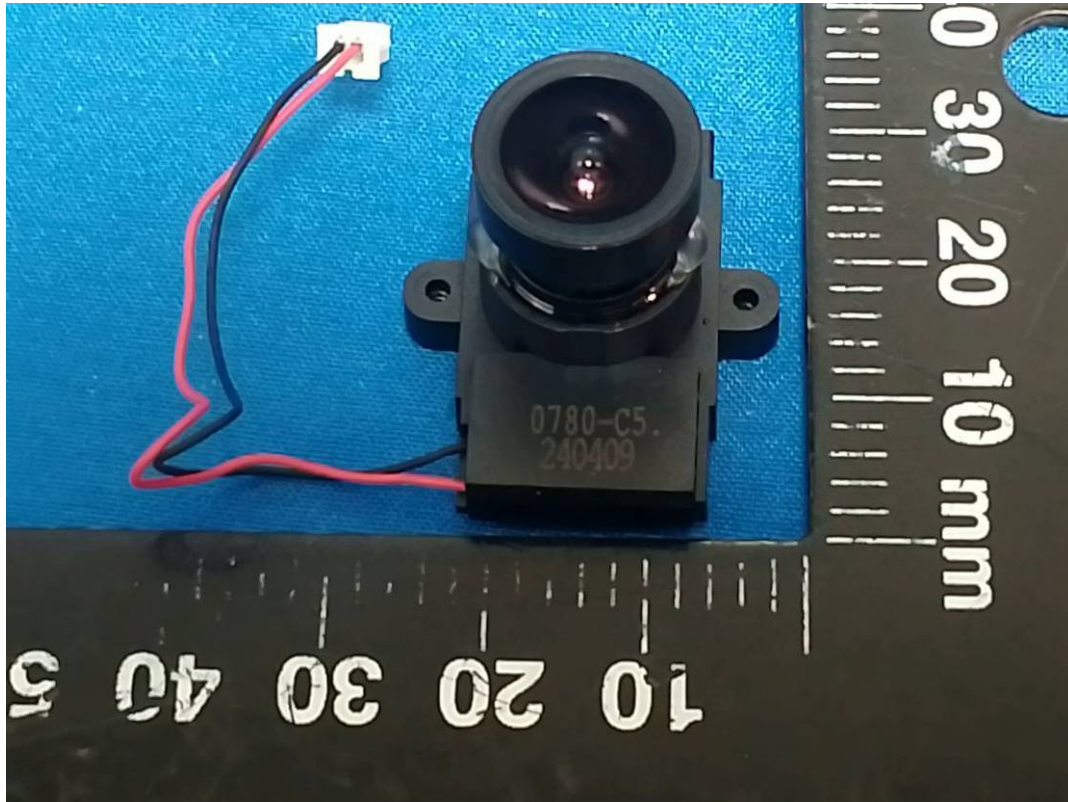


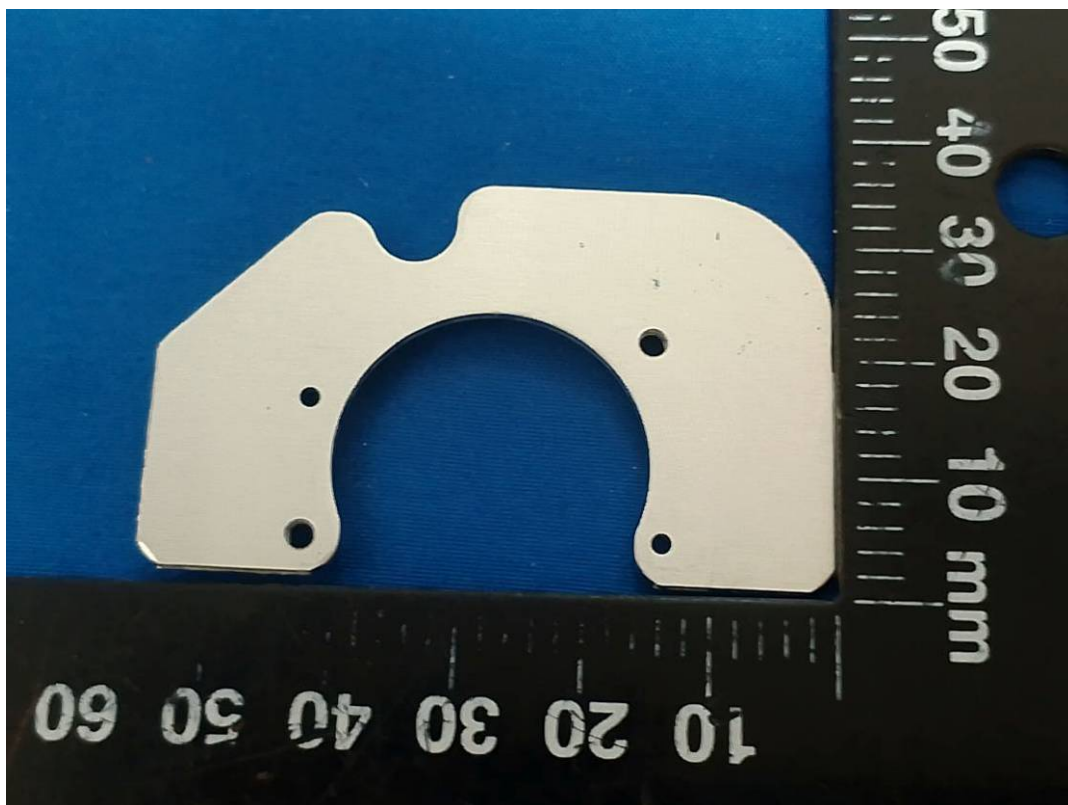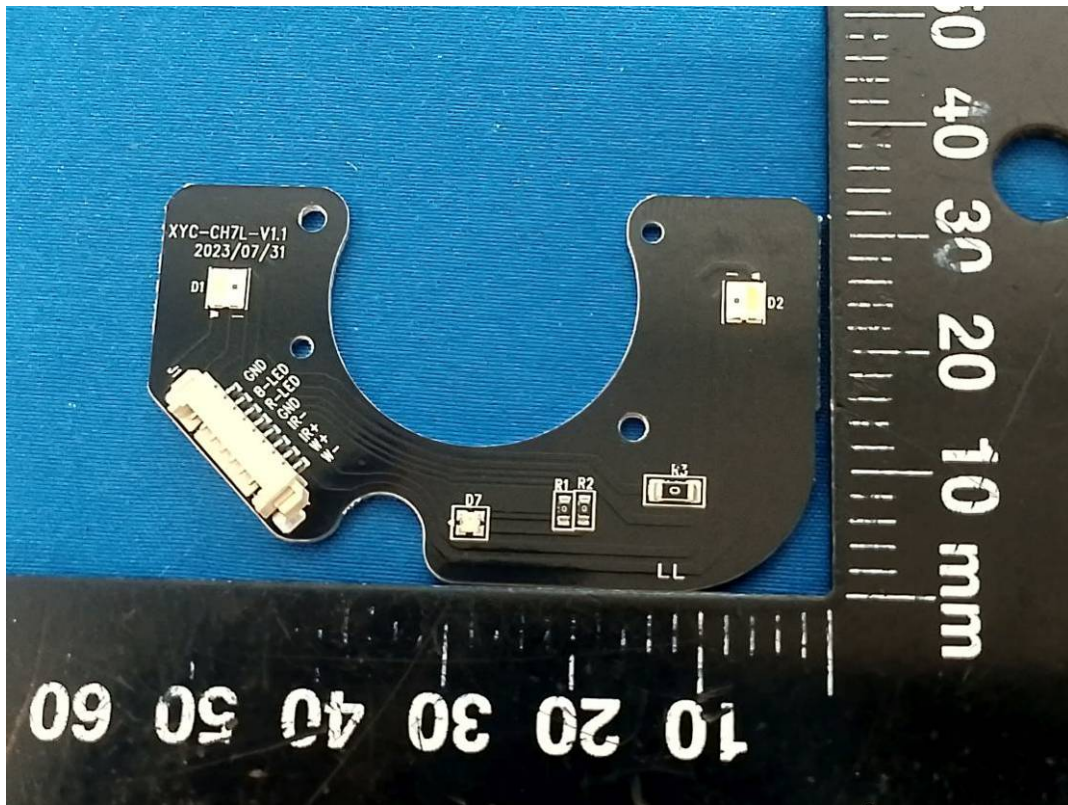





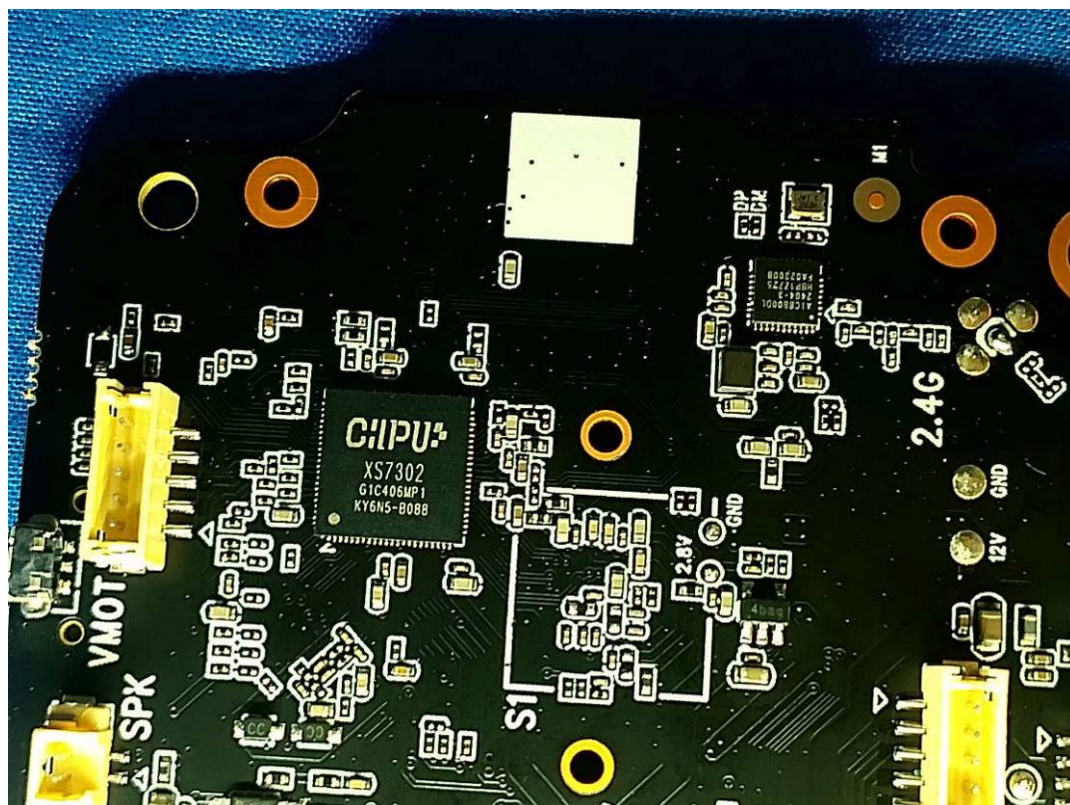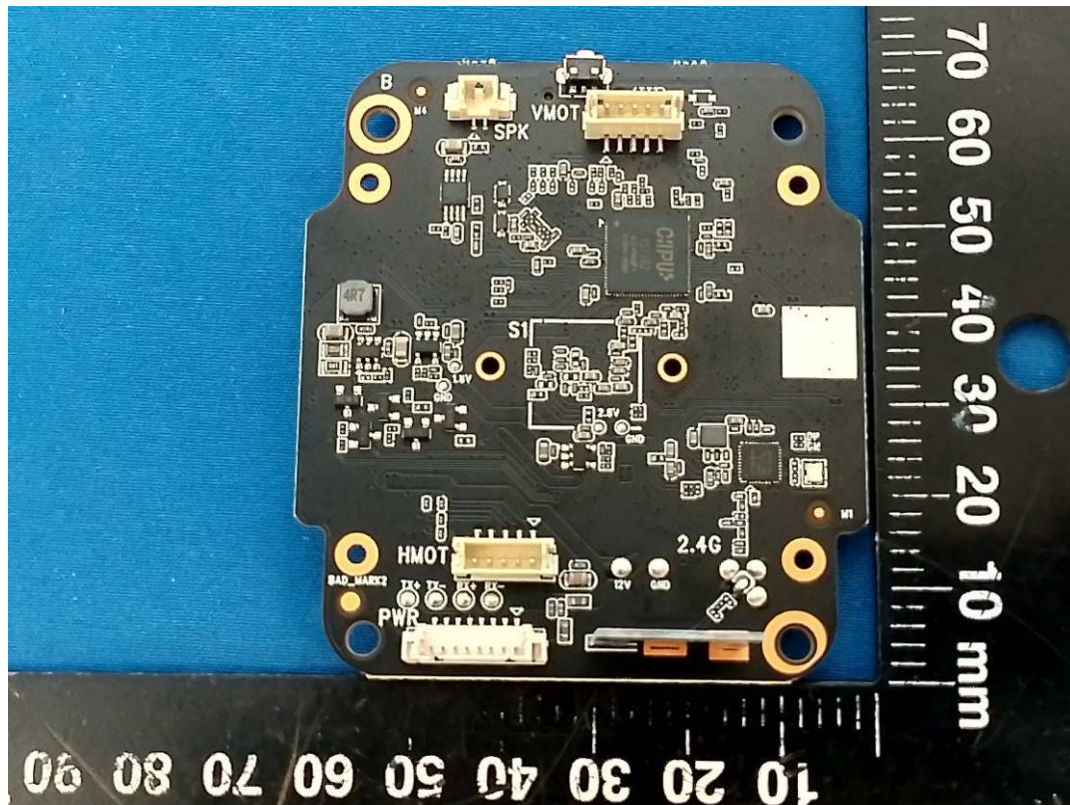


Antenna

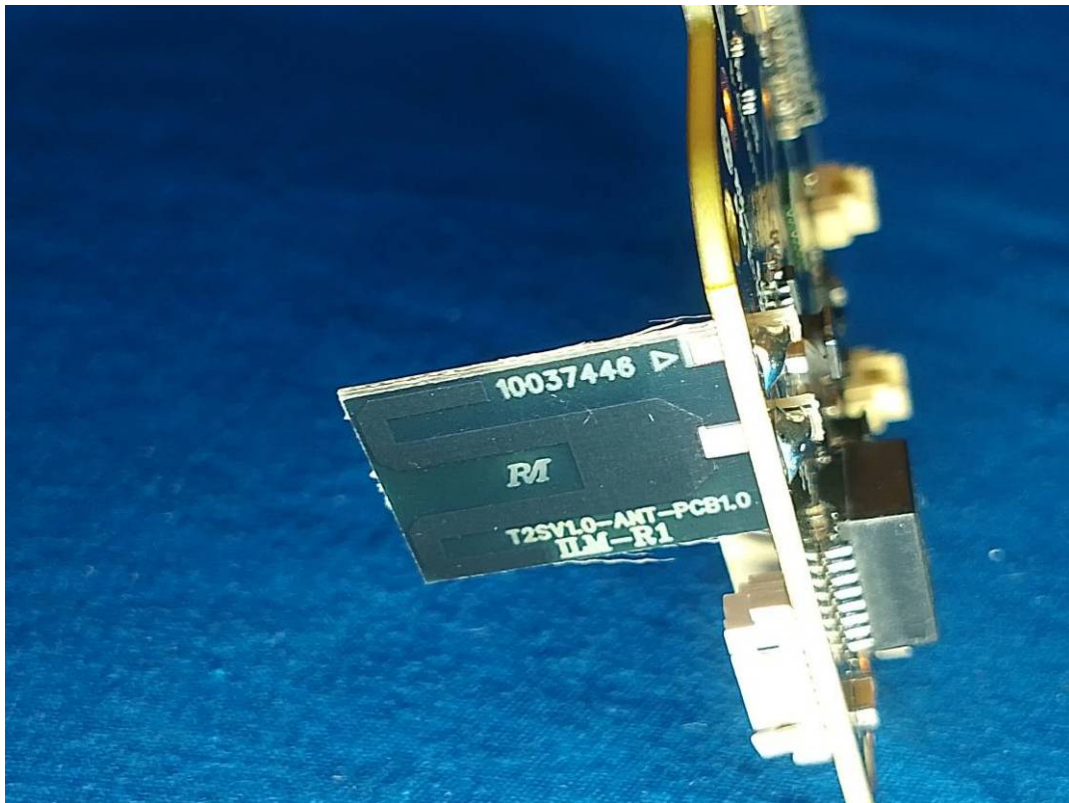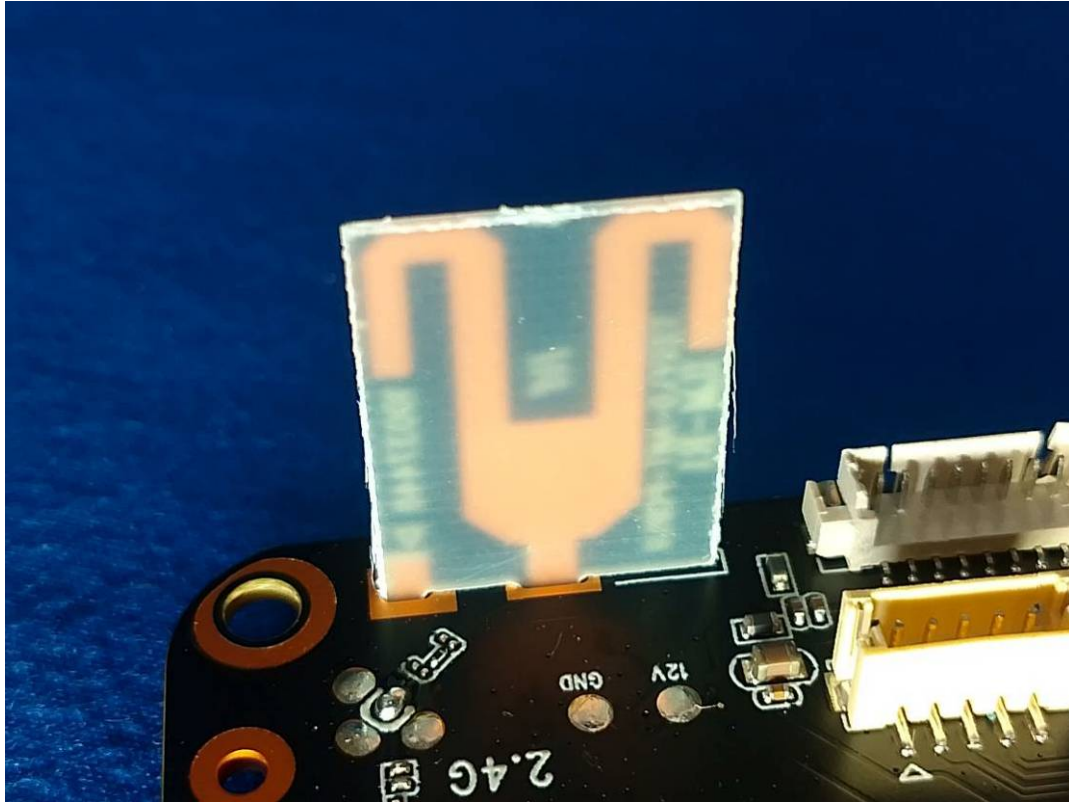




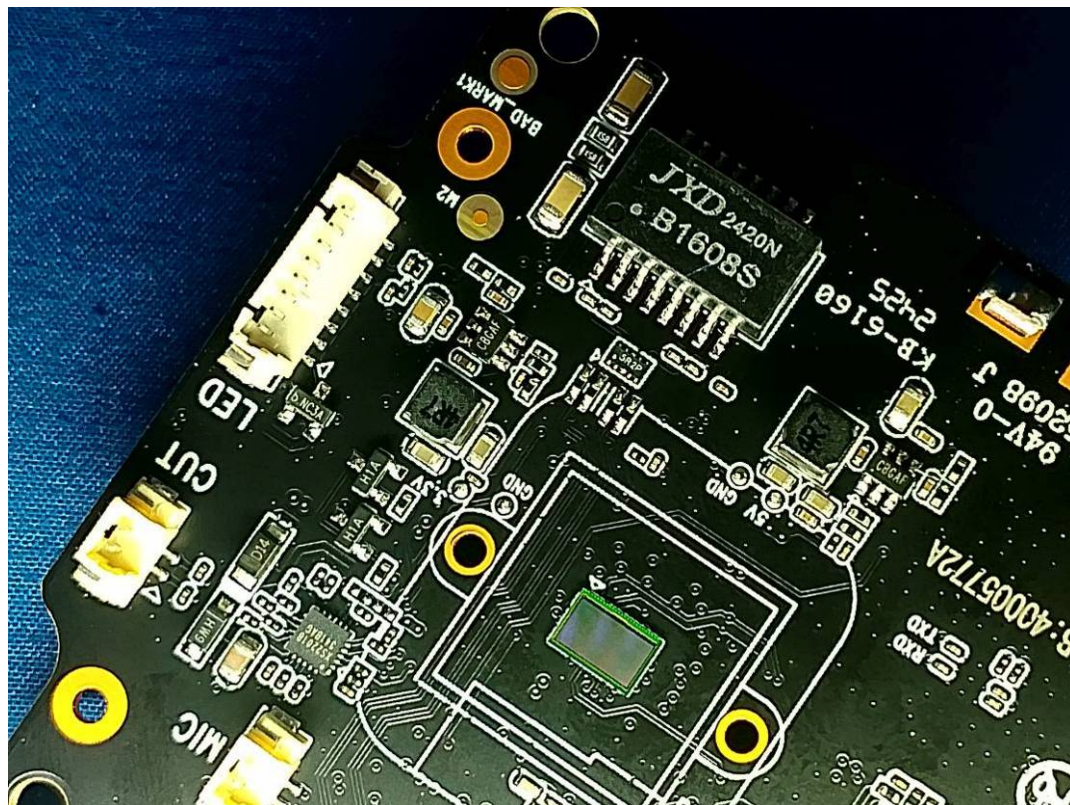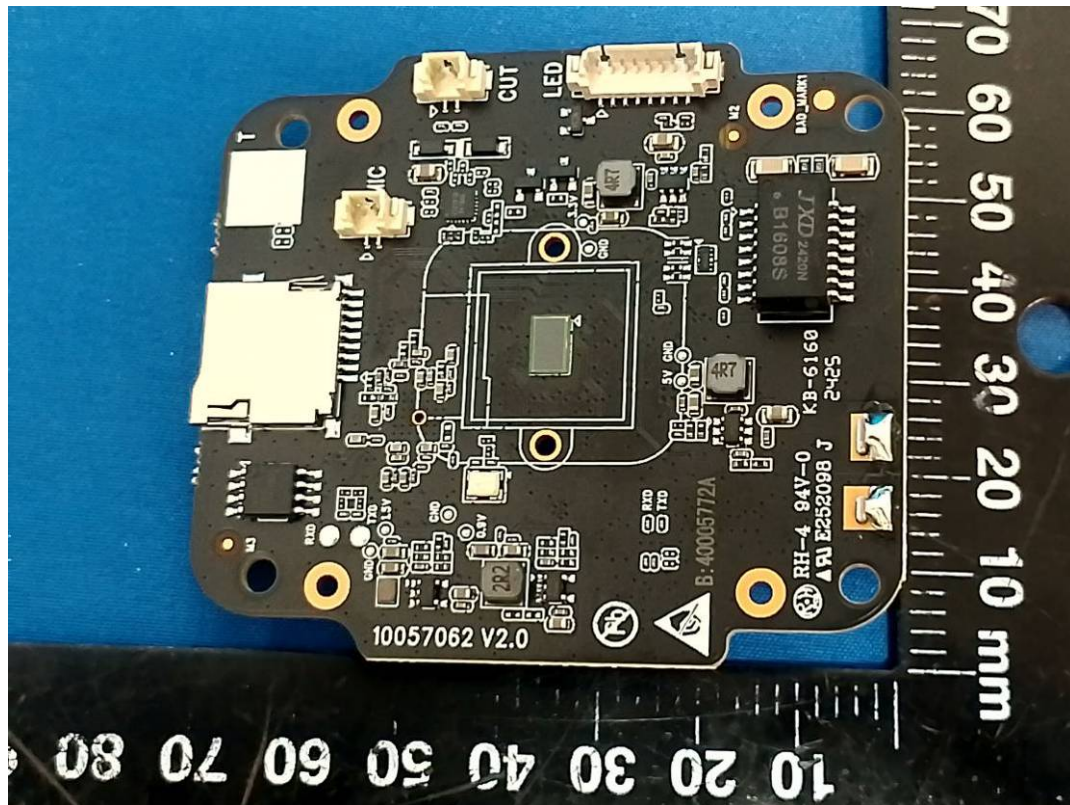

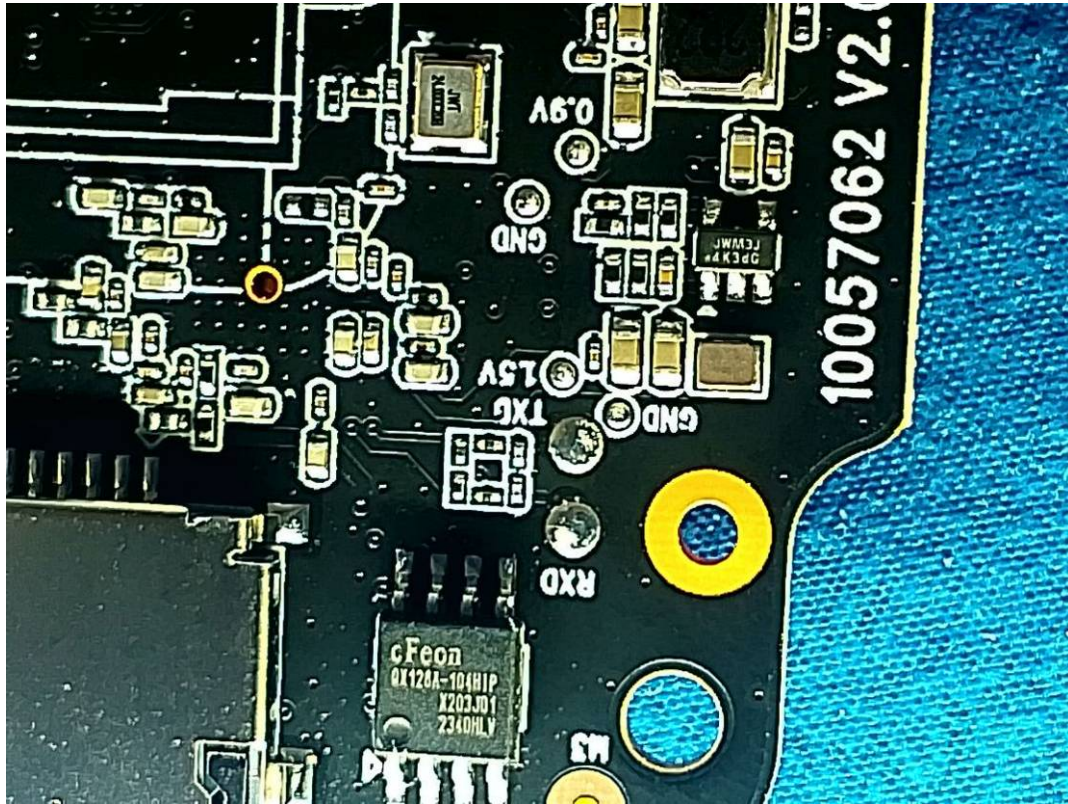



**Model: RH3-WCA**

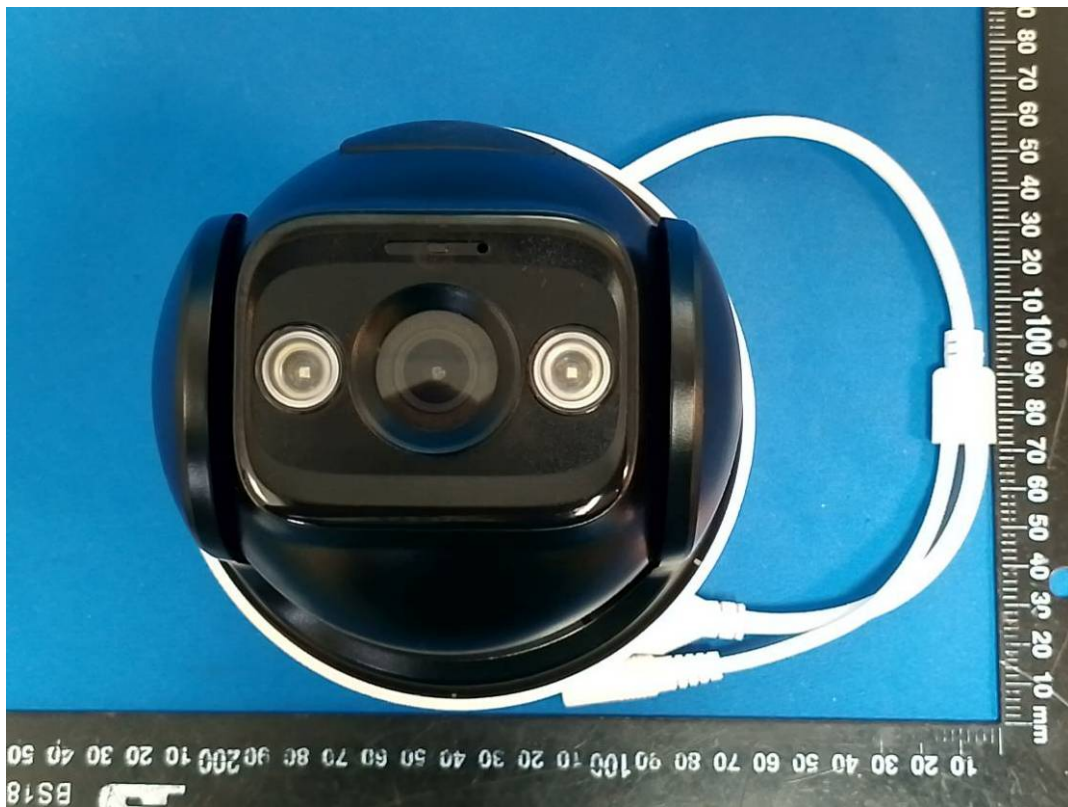

















Uncover










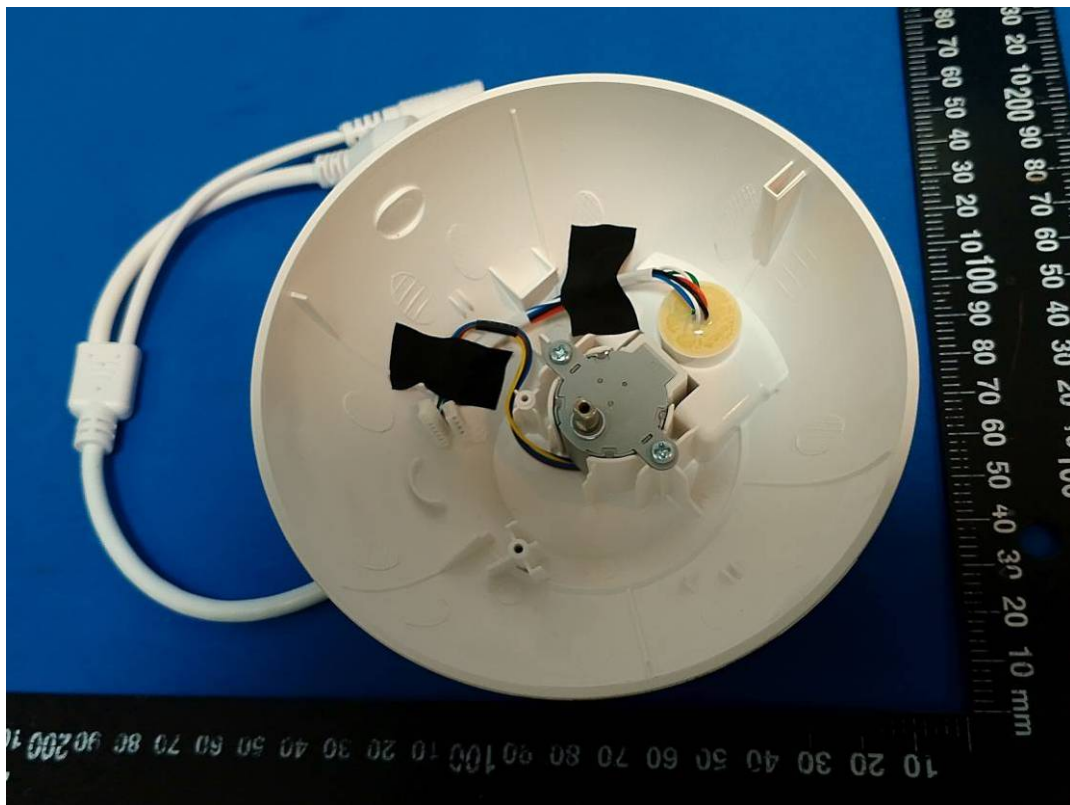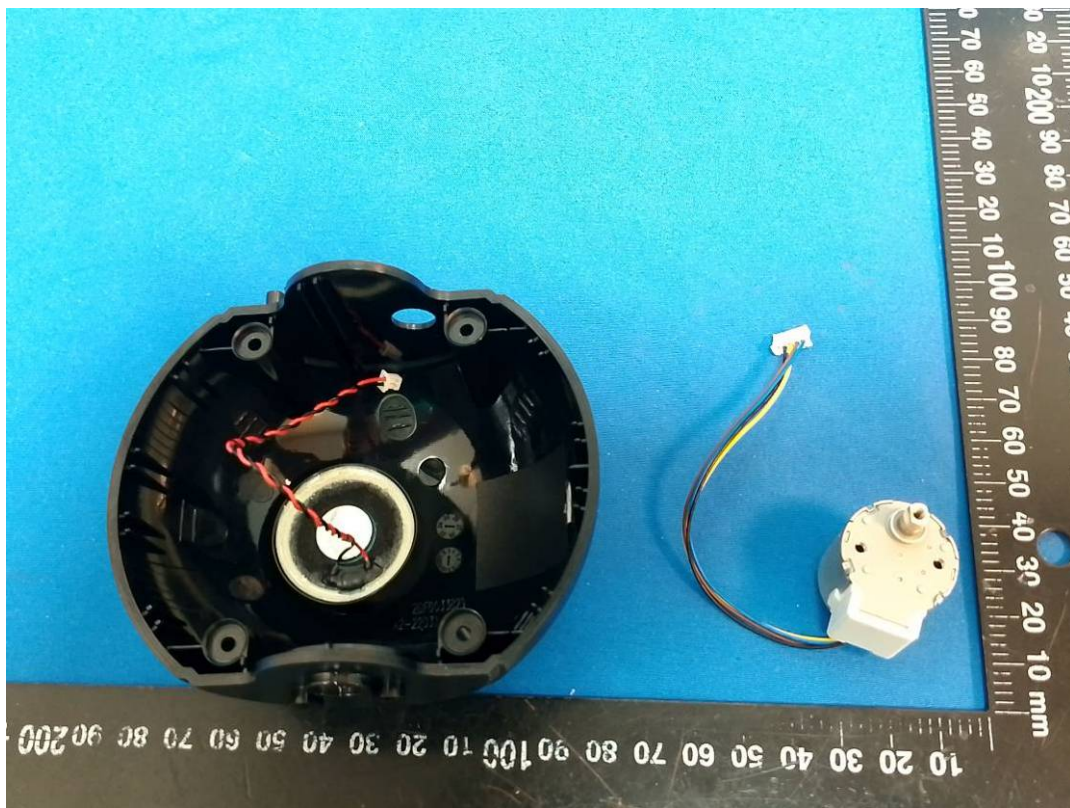

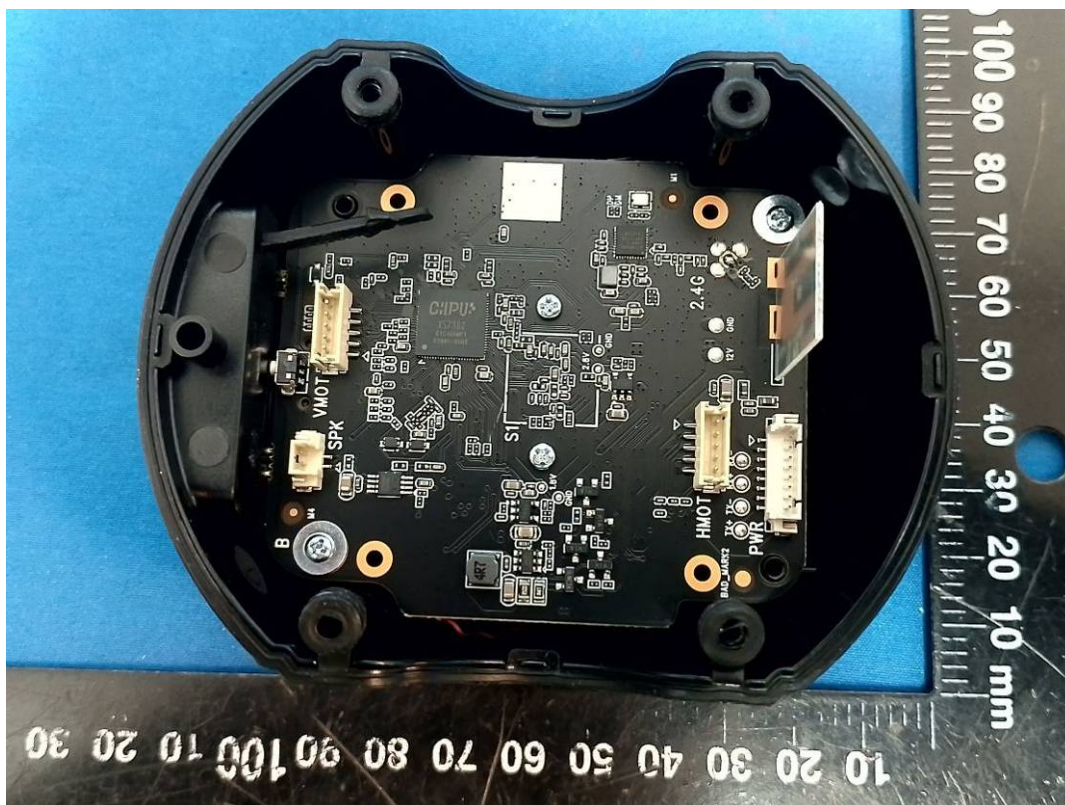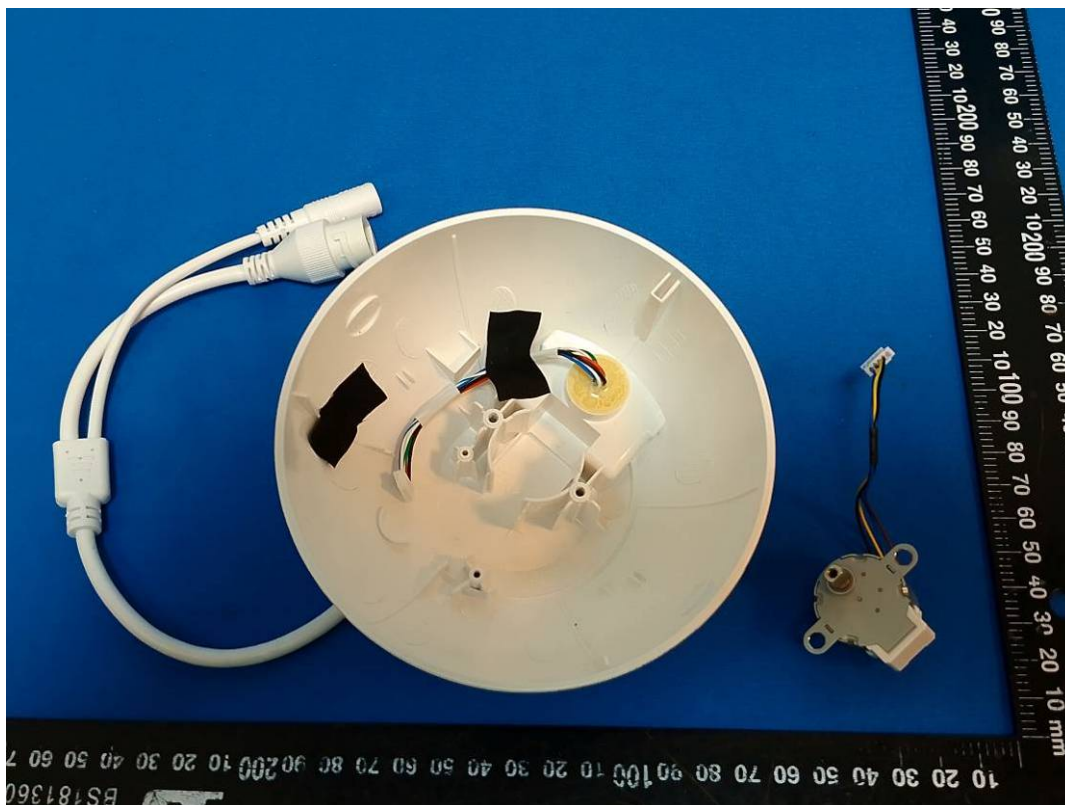





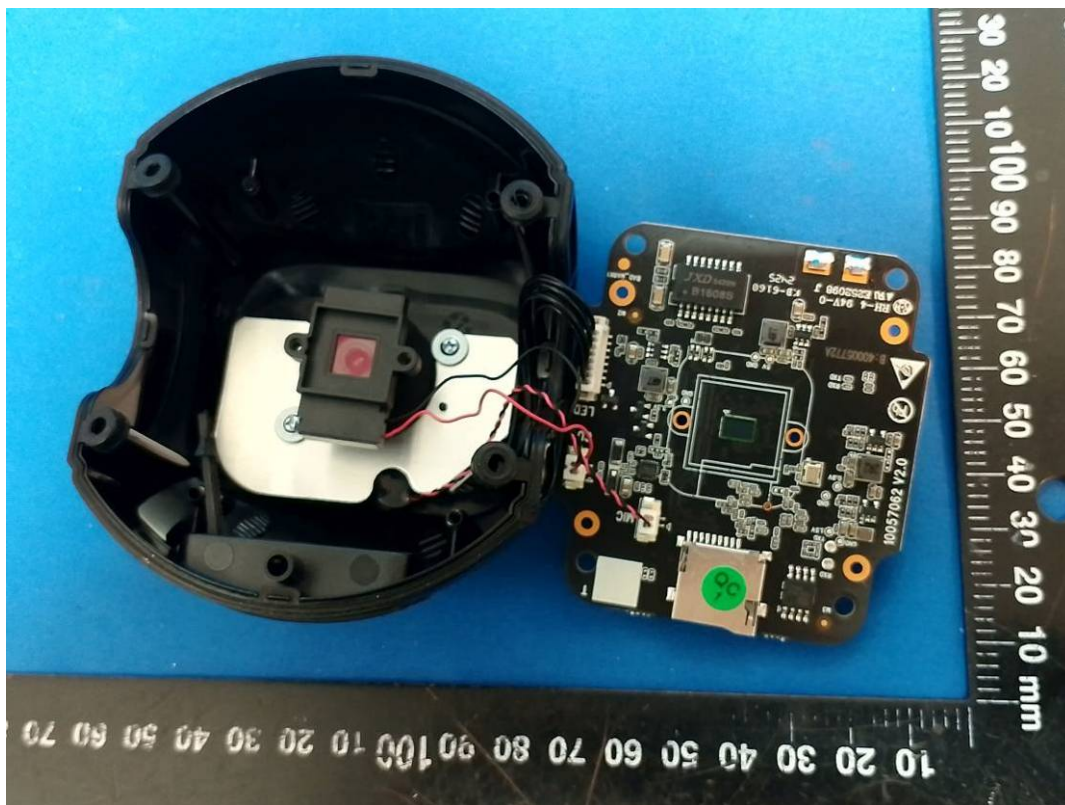


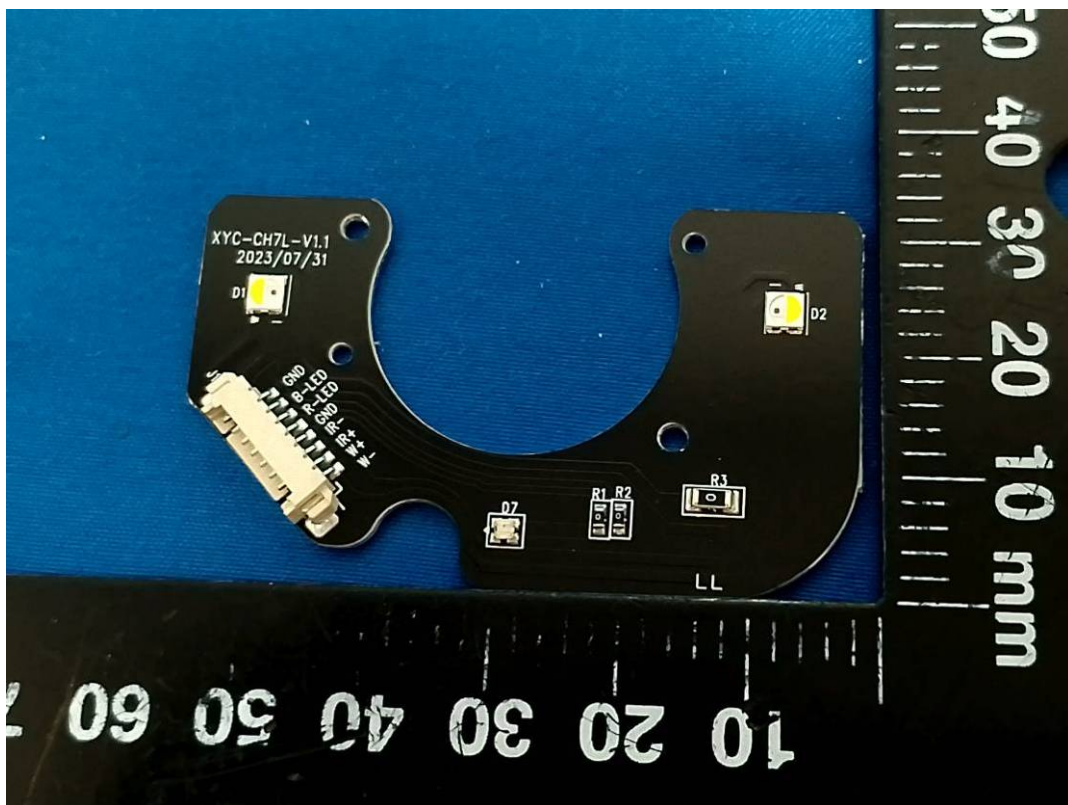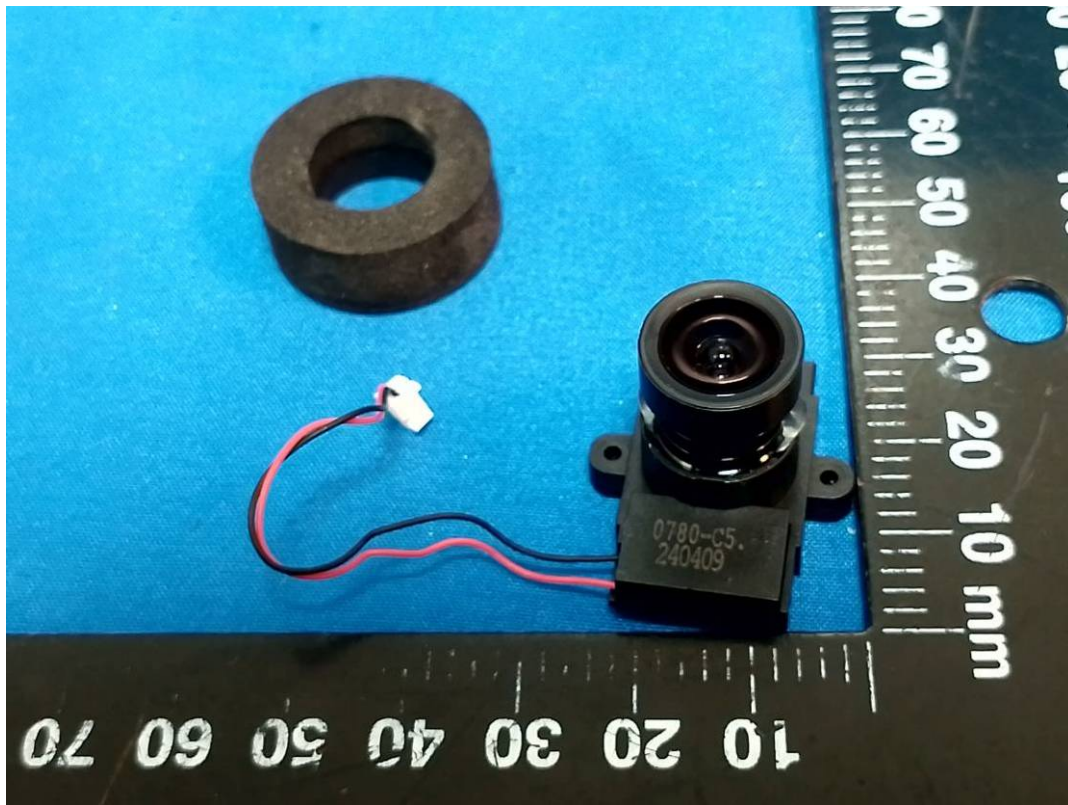



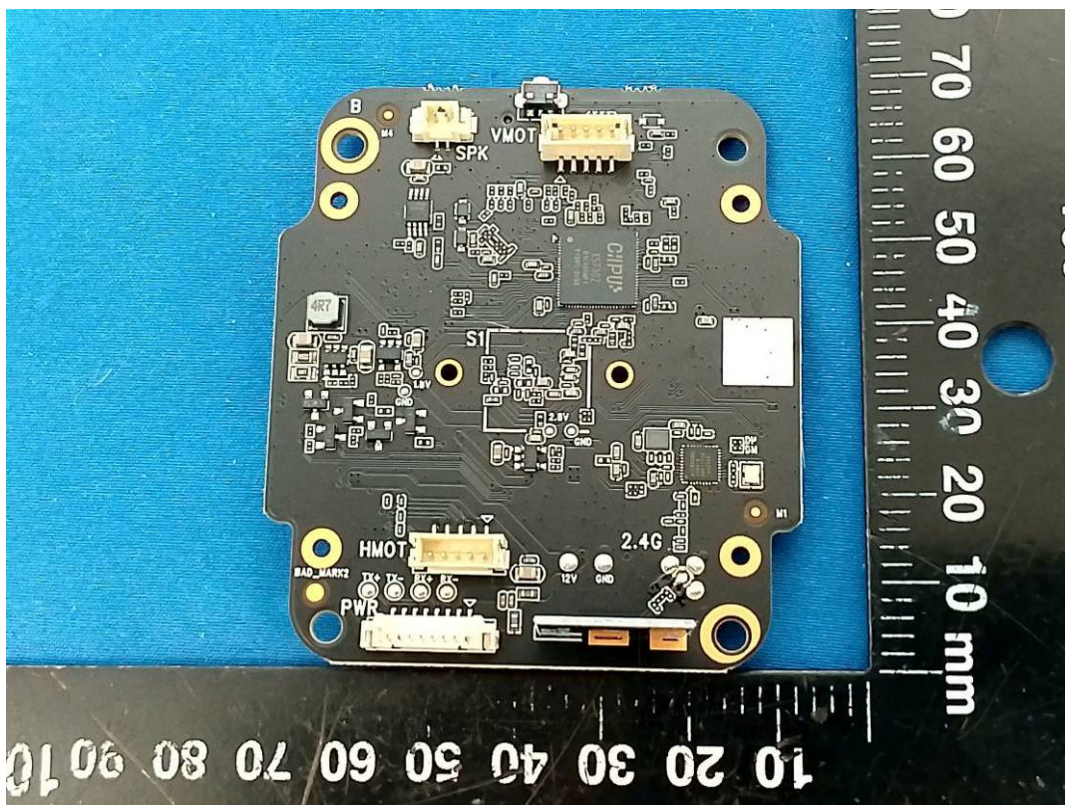





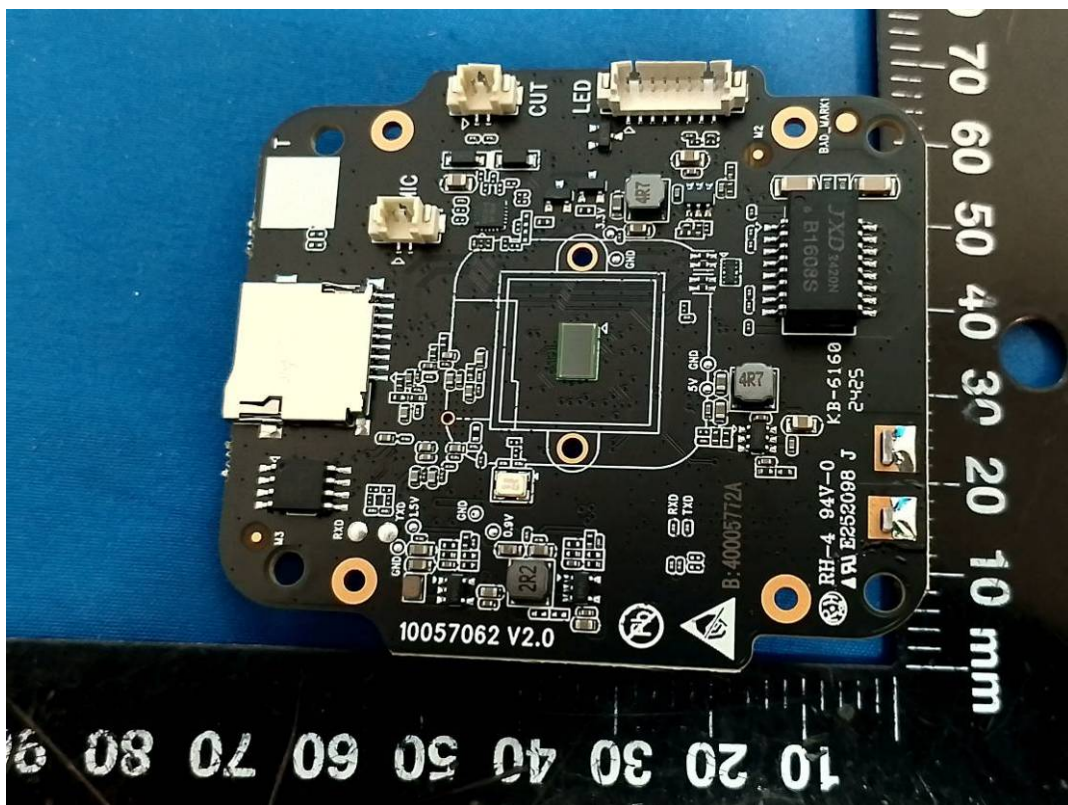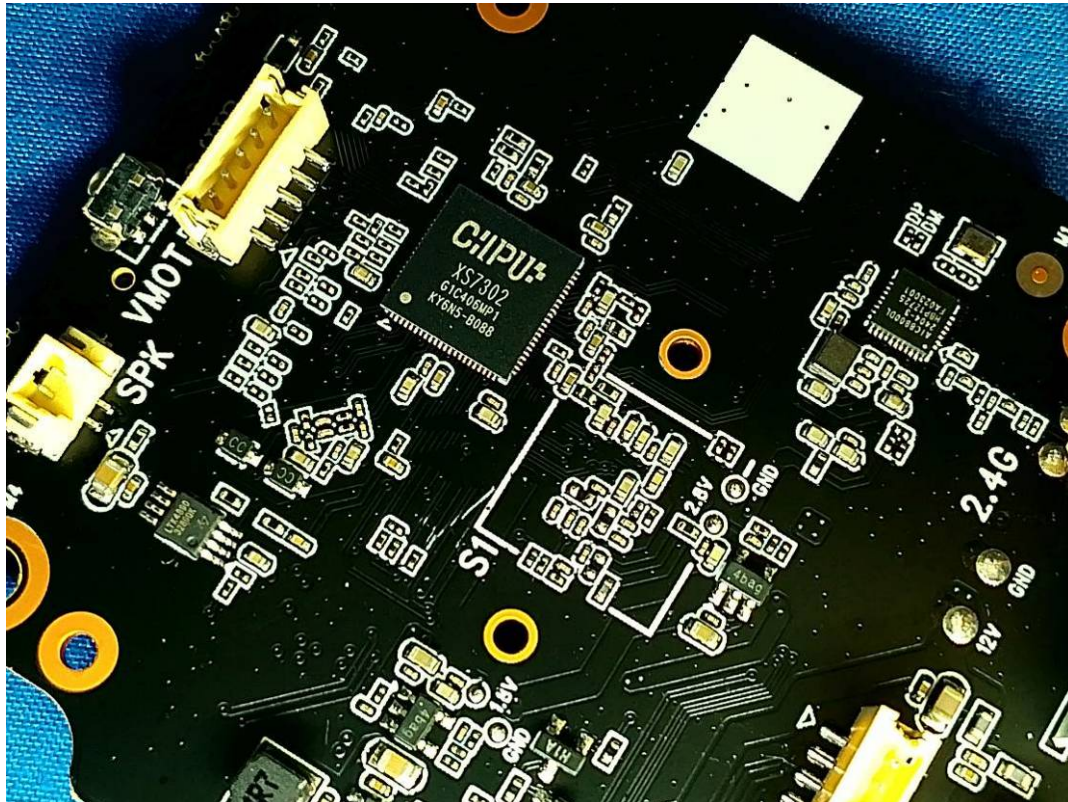





Antenna

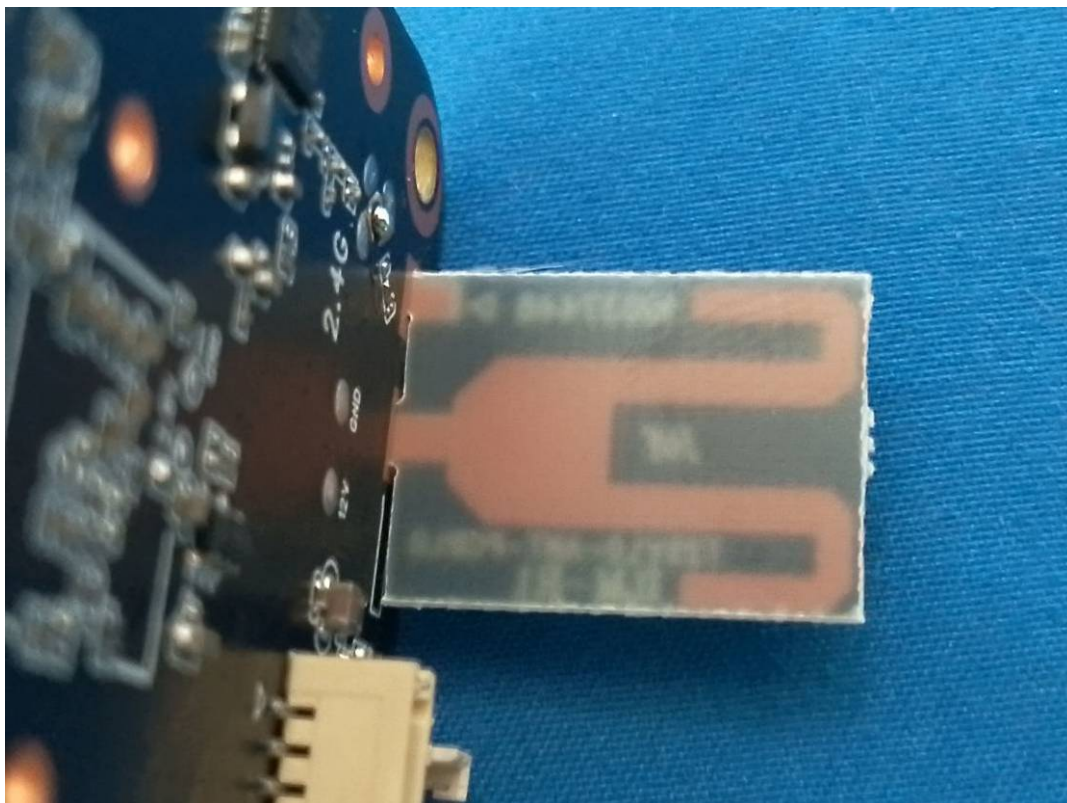

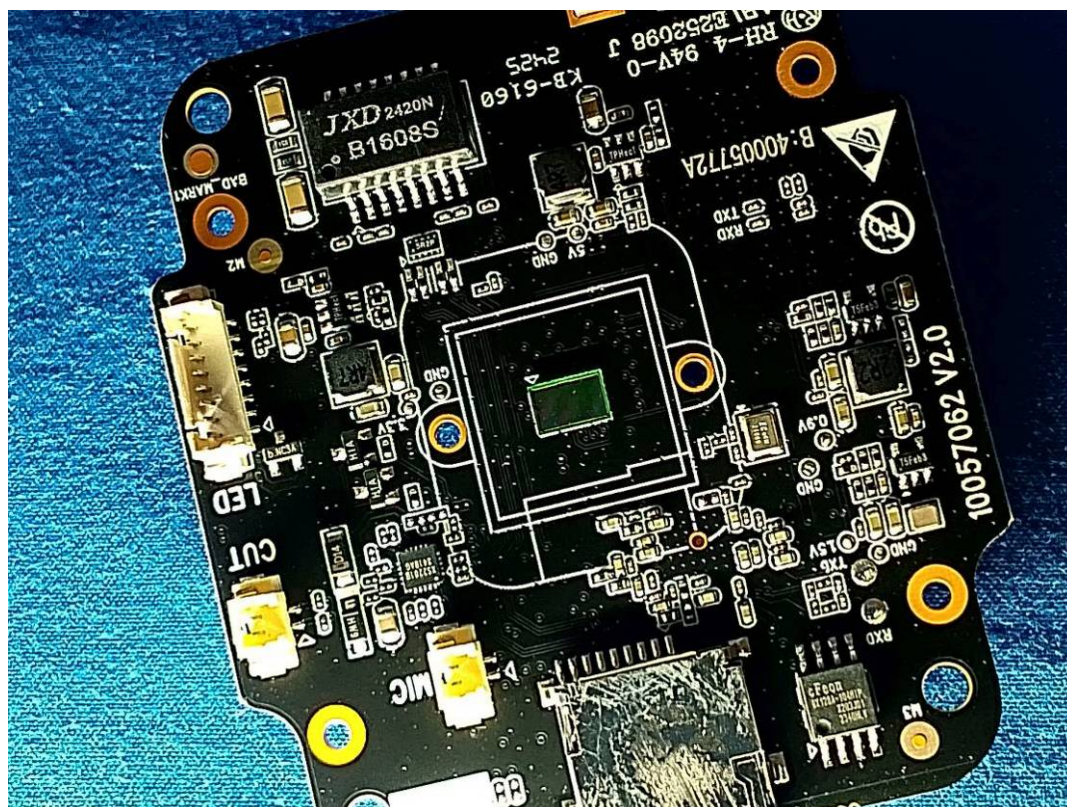



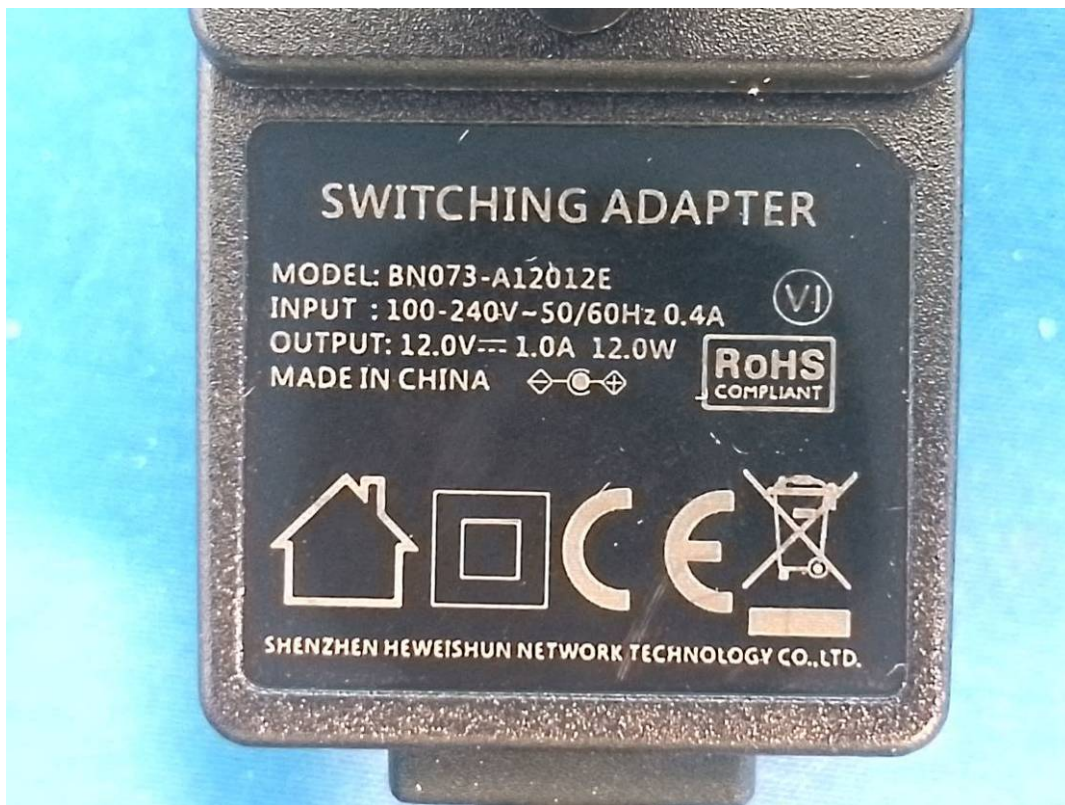

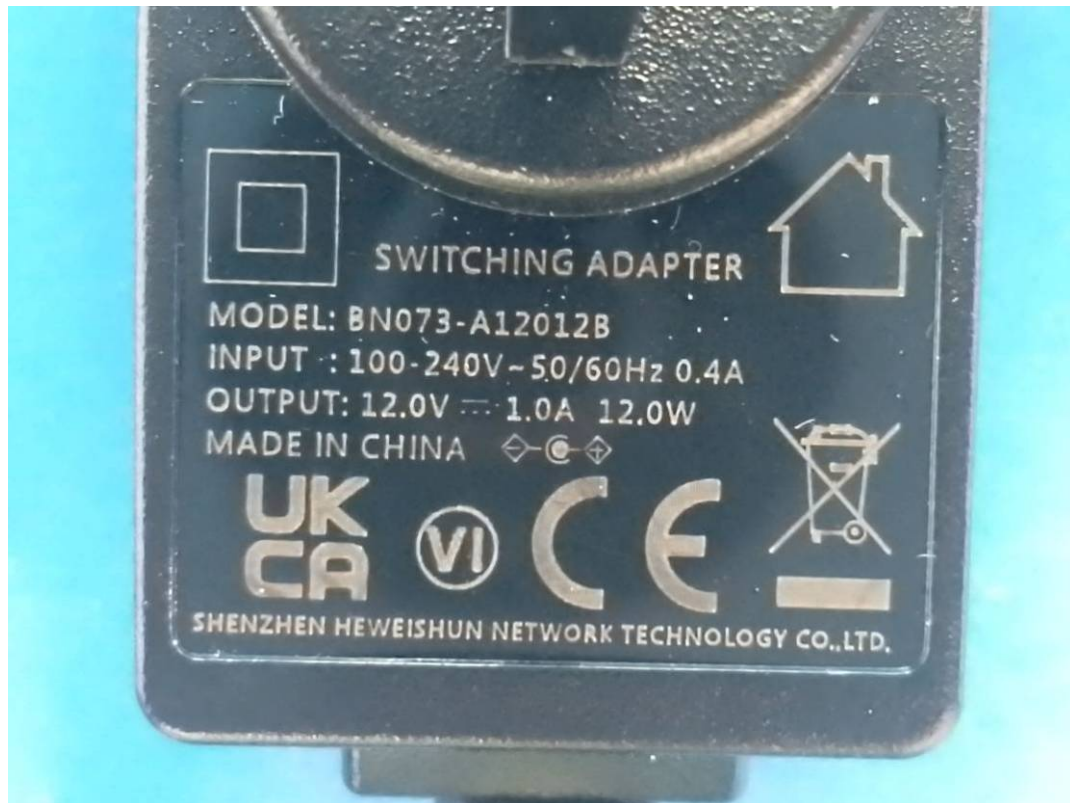




## EXHIBIT B - TEST SETUP PHOTOGRAPHS

RE

RE Below 1GHz front View




RE Below 1GHz rear View

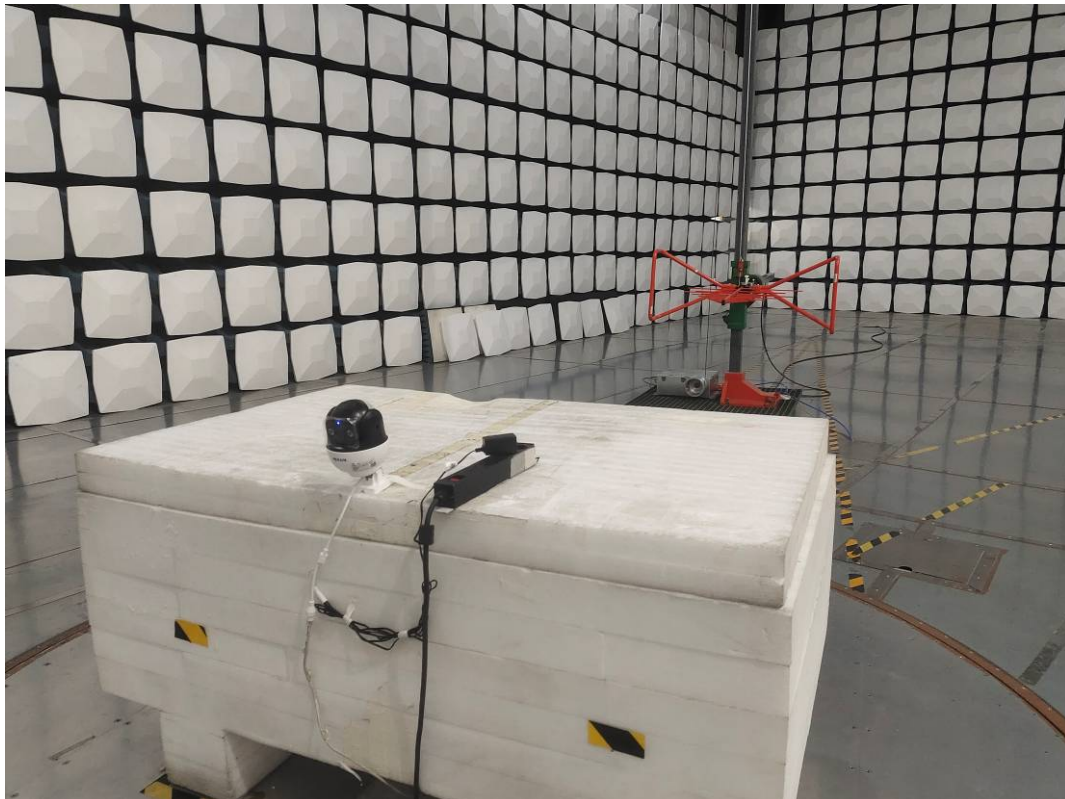

RE Above 1GHz front View



RE Above 1GHz rear View

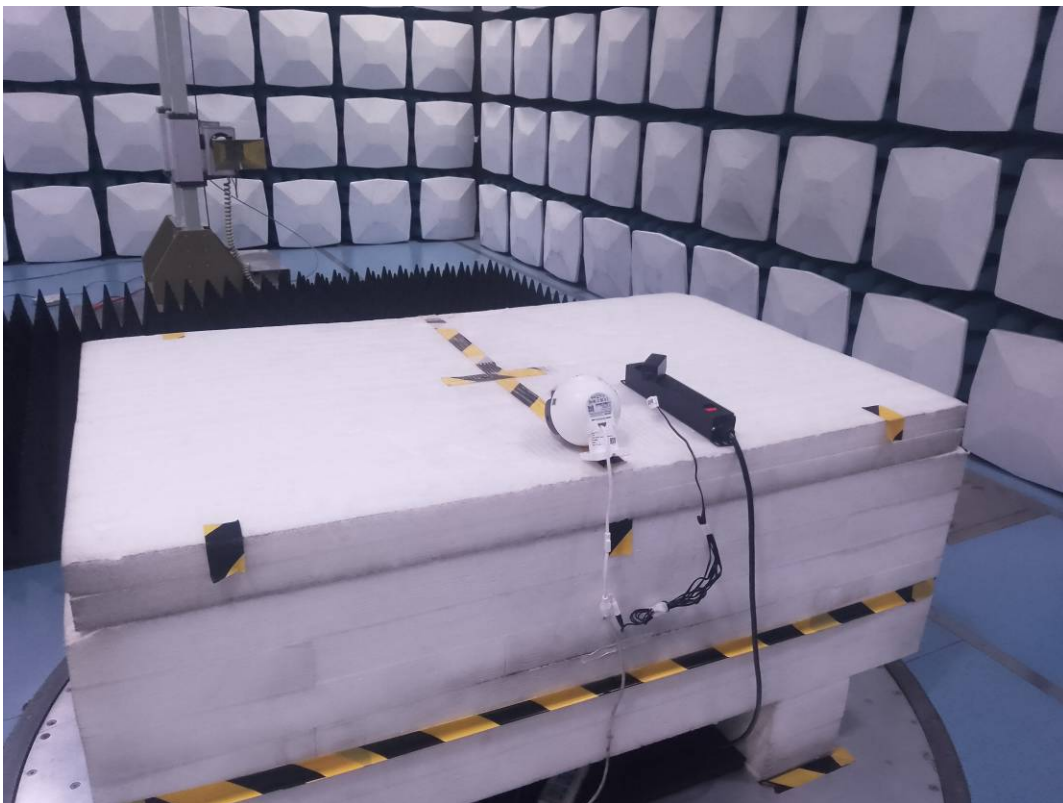




**CE\_AC**

CE front View



CE side View

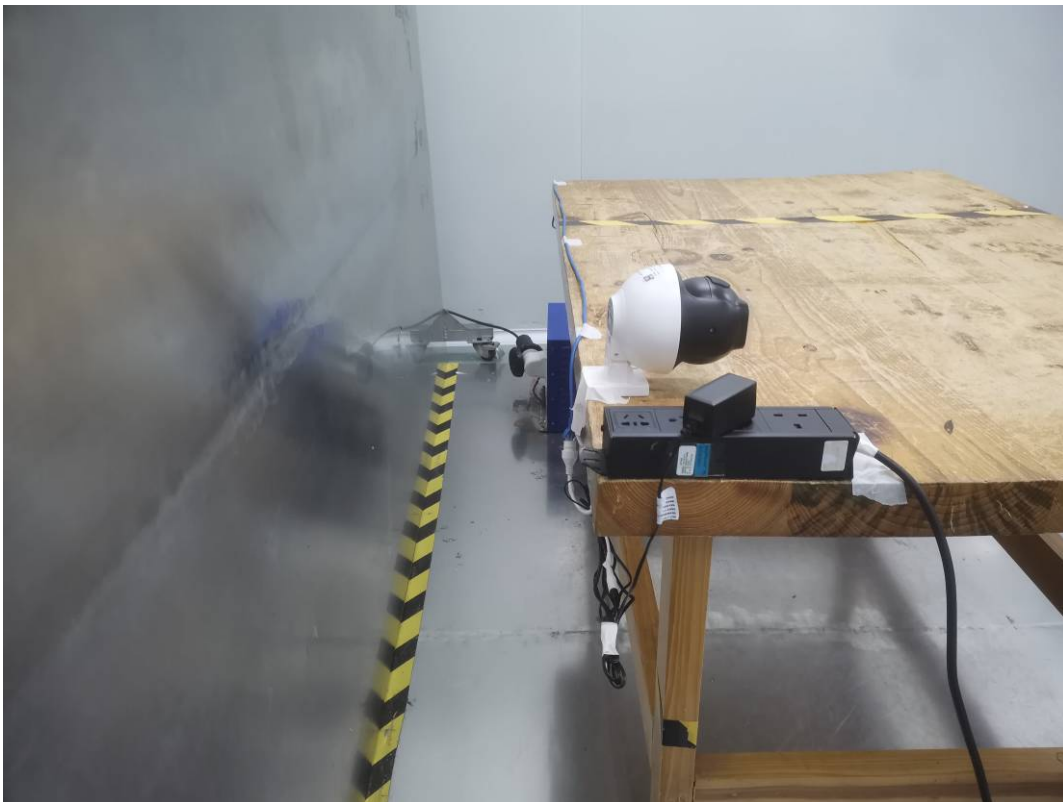


## CE\_Net

CE front View -ISN (RJ45)



CE side View -ISN (RJ45)

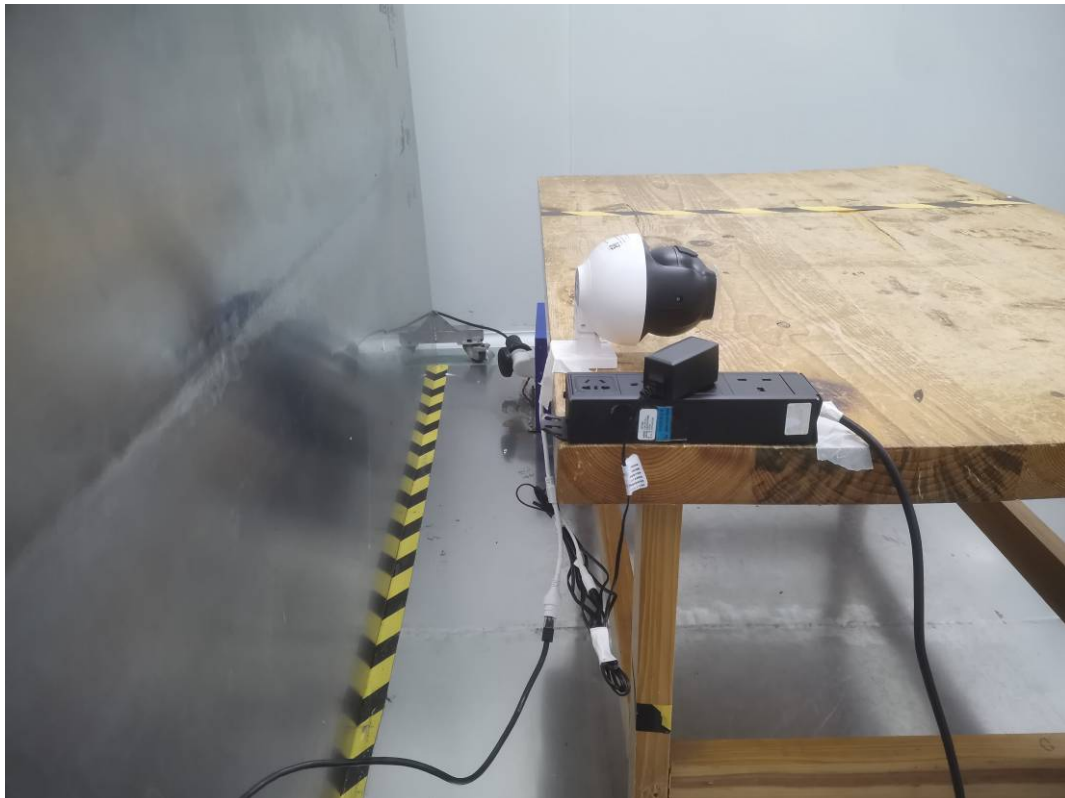




## Flicker

Test Setup Photo View



RS

Test Setup Photo View

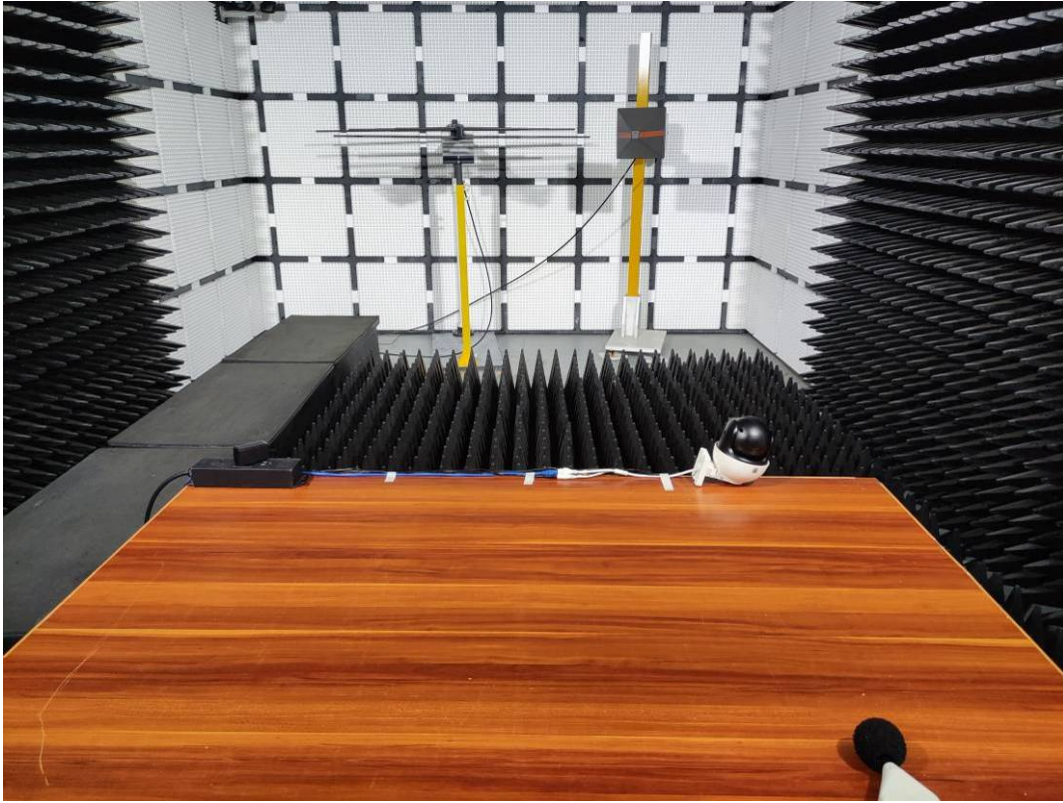


**ESD**

Test Setup Photo View




**EFT**

AC Port Test Setup Photo View

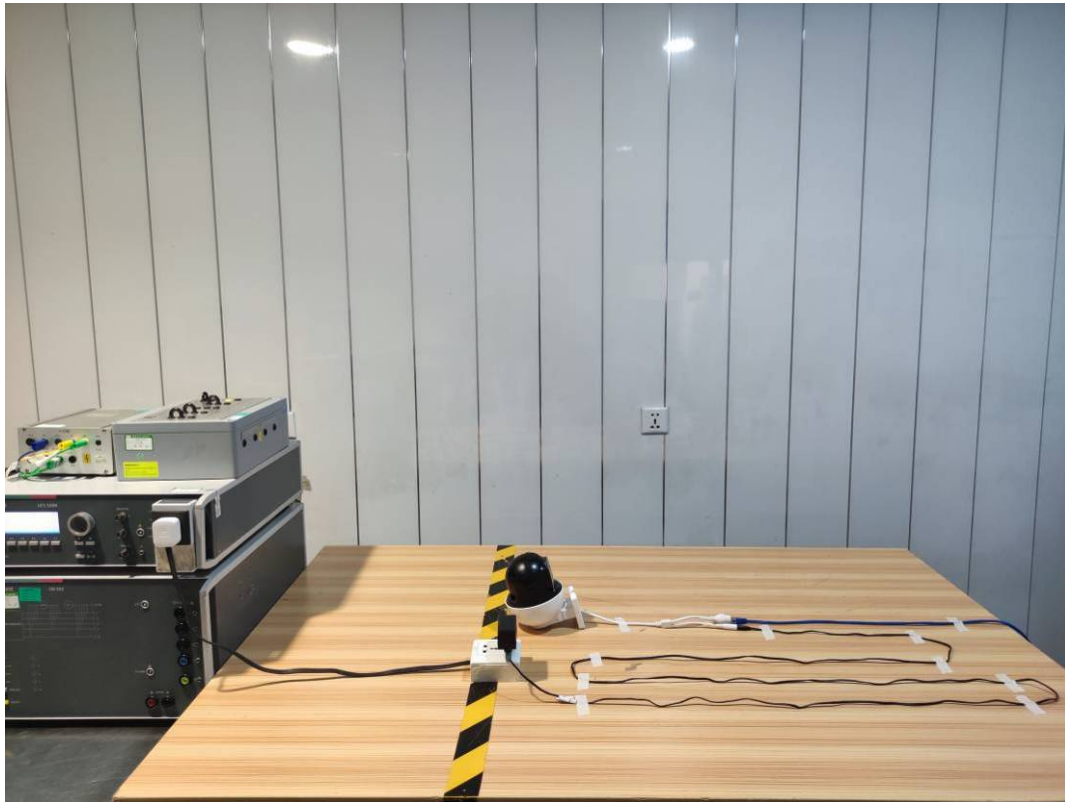


RJ45 Port Test Setup Photo View

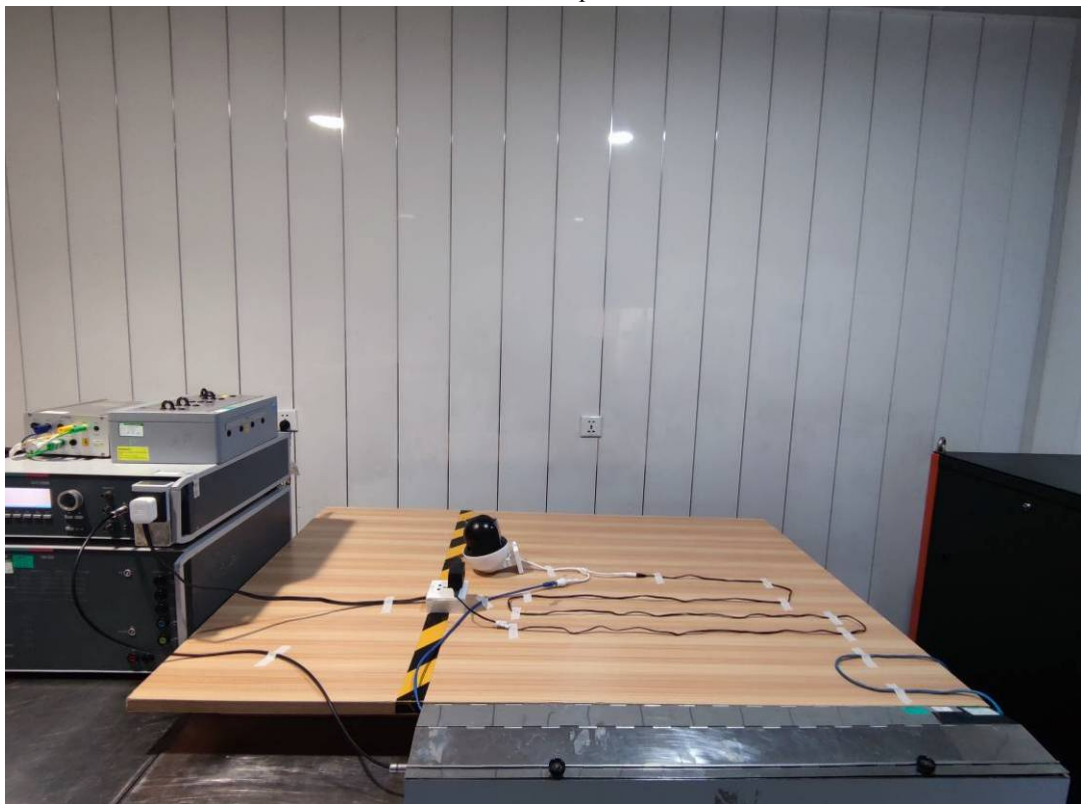

## Dips


AC Port Test Setup Photo View

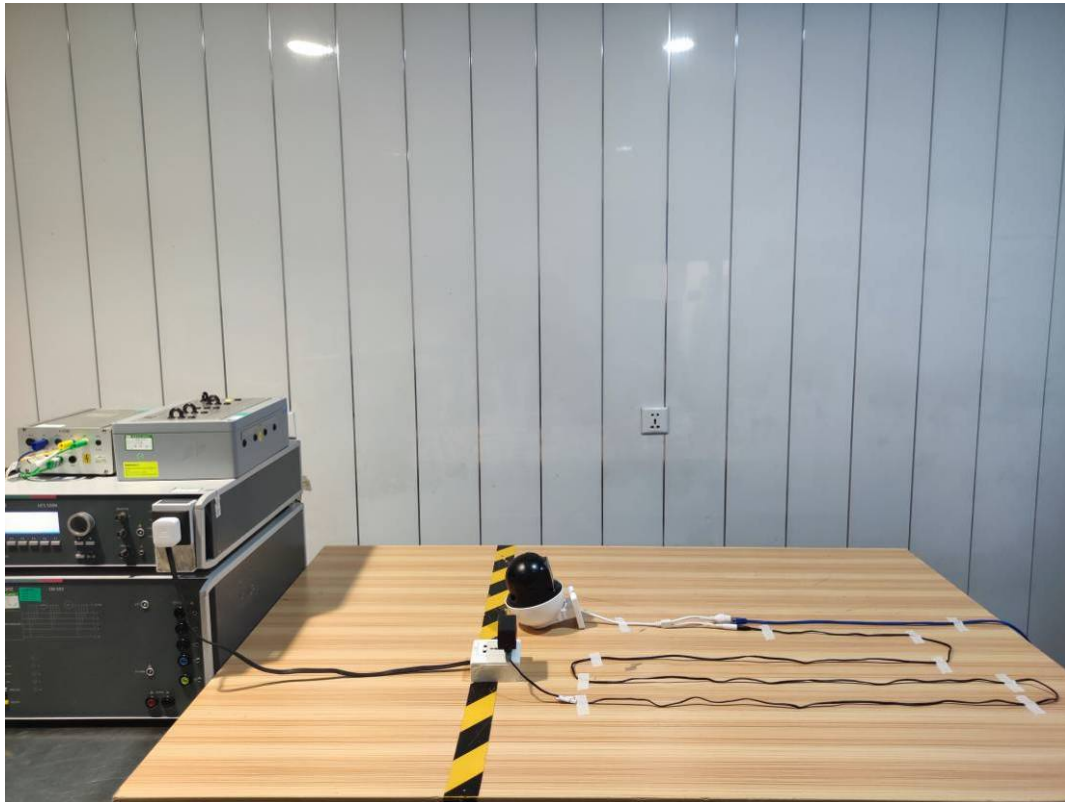




## Surge

AC Port Test Setup Photo View

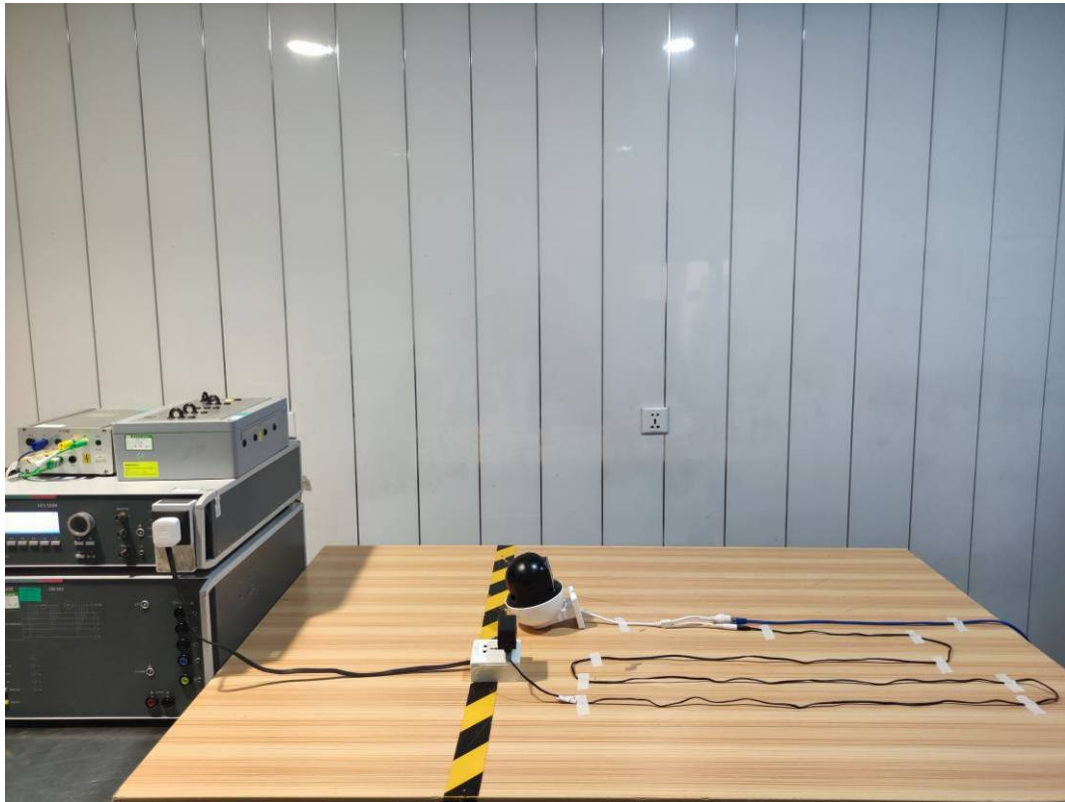

RJ45 Port Test Setup Photo View

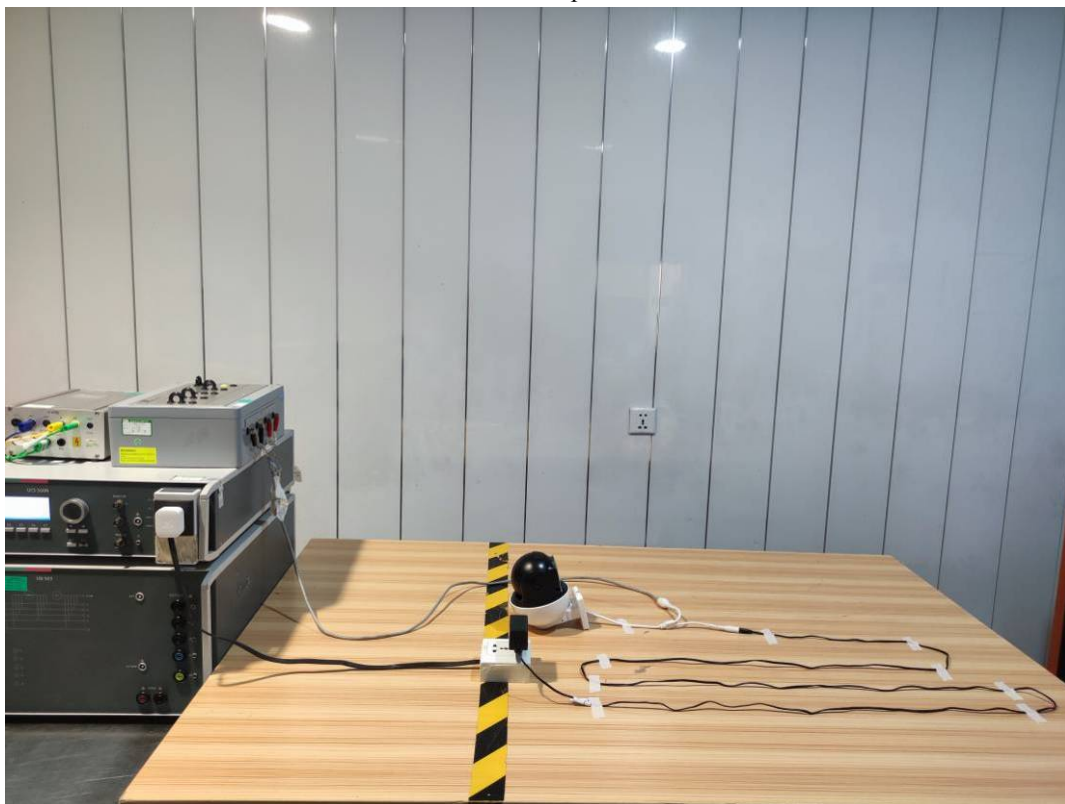

AC Port Test Setup Photo View



\*\*\*\*\*END OF REPORT\*\*\*\*\*